

Submittal Package



TABLE OF CONTENTS

Section	Sub-Section	Literature
Quote		
Model 250REOZJE Spec Sheets		
Specification Sheet	Controller	G6-161
Specification Sheet	Circuit Breaker	G6-88
Specification Sheet	Circuit Breaker	Circuit Breaker Trip Curves
Specification Sheet	Circuit Breaker	P_R Frame Breaker
Specification Sheet	Battery Charger	G6-146
Specification Sheet	Weather/ Sound Enclosure Packaging	Enclosure Package
Specification Sheet	Engine Block Heater	G6-170
Specification Sheet	Voltage Regulator	Voltage Regulator
Alternator Data		
	Alternator Data Sheet	4UA10
Sound Data		
	Sound Data Sheet	Sound Data
Emissions Data		
	Emissions Data	Emissions Data
	EPA Certificate	EPA Certificate
Dimensional Drawings		
	Generator	ADV-7900
	Accessories	ADV-7890
	Controller	ADV-7935
	Enclosure	ADV-7644
	State Tank	ADV-7645



WiringSchematicDiagrams

Controller Schematic Diagram	ADV-7933
Controller Schematic Diagram	ADV-7970
Controller Wiring Diagram	GM77079
Controller Wiring Diagram	GM78714
Interconnection Diagram	GM78246
Voltage Diagram	ADV-5875

Misc

Battery	244578
Battery Charger	GM87448
Battery Charger Assembly	GM94920
Block Heater	GM76113
Block Heater	GM76120
Circuit Breaker	GM24181
Circuit Breaker Mounting	ADV-7372

Warranty

Warranty	TP-5374
Warranty	TP-5561

Certification

ISO9001 Certificate	G15-152
Prototype Test Summary	G18-462
Prototype Test Certificate	G18-56


Pre-Startup Checklist

Pre-Startup Checklist	PreStartUpCheckList
-----------------------	---------------------

Generator

Kohler Model: 250REOZJE

This diesel generator set equipped with a 4UA10 alternator operating at 120/208 volts is rated for 250 kW/313 kVA. Output amperage: 867

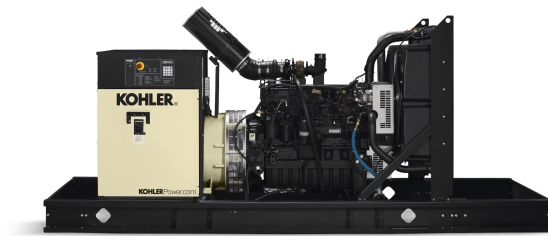

Standard Features:

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- Approved for use with certified renewable Hydrotreated Vegetable Oil (HVO) / Renewable Diesel (RD) fuels compliant with EN15940/ASTM D975.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- The 60 Hz generator set offers a UL 2200 listing.
- The generator set accepts rated load in one step.
- The 60 Hz generator set meets NFPA 110, Level 1, when equipped with the necessary accessories and installed per NFPA standards.
- The generator set complies with ISO 8528-5, Class G2, requirements for transient performance in all generator set configurations. Select the Decision-Maker 550 controller for improved voltage regulation and ISO 8528-5, Class G3, compliance.
- The 60 Hz generator set engine is certified by the Environmental Protection Agency (EPA) to conform to Tier 3 nonroad emissions regulations.
- A one-year limited warranty covers all systems and components. Two-, five-, and ten-year extended warranties are also available.
- Tier 3 EPA-Certified for Stationary Emergency Applications
- Alternator Protection
- Battery Rack and Cables
- Customer Connection box with field-connection terminal blocks.
- Local Emergency Stop Switch
- Oil Drain Extension
- Operation and Installation Literature

Other Features:

- Kohler designed controllers for one-source system integration and remote communication.
- The low coolant level shutdown prevents overheating (standard on radiator models only). Integral vibration isolation eliminates the need for under-unit vibration spring isolators.
- Mount up to three circuit breakers to allow circuit protection of selected priority loads.


Alternator Features:

- The unique Fast-Response™ II excitation system delivers excellent voltage response and short circuit capability using a permanent magnet (PM)-excited alternator.
- The brushless, rotating-field alternator has broad range reconnectability.

Qty	Description																																																														
	250REOZJE Generator System																																																														
2	<p>250REOZJE Generator Set</p> <p>Includes the following:</p> <table> <tr><td>Literature Languages</td><td>English</td></tr> <tr><td>Approvals and Listings</td><td>UL2200 Listing</td></tr> <tr><td>Engine</td><td>250REOZJE, 24V, 60Hz</td></tr> <tr><td>Nameplate Rating</td><td>Standby 130C Rise</td></tr> <tr><td>Voltage</td><td>60Hz, 120/208V, Wye, 3Ph, 4W</td></tr> <tr><td>Alternator</td><td>4UA10</td></tr> <tr><td>Cooling System</td><td>Unit Mounted Radiator, 50C</td></tr> <tr><td>Skid and Mounting</td><td>Skid/Tank</td></tr> <tr><td>Air Intake</td><td>Standard Duty</td></tr> <tr><td>Controller</td><td>APM402</td></tr> <tr><td>Enclosure Type</td><td>Sound</td></tr> <tr><td>Enclosure Material</td><td>Steel</td></tr> <tr><td>Enclosure Silencer</td><td>Internal Silencer</td></tr> <tr><td>Fuel Tank Type</td><td>Standard</td></tr> <tr><td>Fuel Runtime (Approx.)</td><td>24 Hours</td></tr> <tr><td>Subbase Fuel Tank Capacity</td><td>472 Gallons</td></tr> <tr><td>Fuel Tank Options</td><td>Inner Tank Leak Alarm</td></tr> <tr><td>Starting Aids, Installed</td><td>2500W,90-120V,1Ph,w/Valves</td></tr> <tr><td>Electrical Accy.,Installed</td><td>Battery, 2/12V, Wet</td></tr> <tr><td>Electrical Accy.,Installed</td><td>Battery Charger, 10A</td></tr> <tr><td>Electrical Accy.,Installed</td><td>Run Relay</td></tr> <tr><td>Electrical Accy.,Installed</td><td>2 Input/5 OutputModule</td></tr> <tr><td>Rating, LCB 1</td><td>100% Rated</td></tr> <tr><td>Amps, LCB 1</td><td>1000</td></tr> <tr><td>Trip Type, LCB 1</td><td>Electronic, LSI</td></tr> <tr><td>Interrupt Rating LCB 1</td><td>35kA at 480V</td></tr> <tr><td>Fuel Lines, Installed</td><td>Flexible Fuel Lines</td></tr> <tr><td>Exceeds LTL Shipping Height</td><td>Add'l Shipping Charge Accepted</td></tr> <tr><td>Miscellaneous Accy,Installed</td><td>Coolant in Genset</td></tr> <tr><td>Warranty</td><td>5 Year Comprehensive</td></tr> <tr><td>Testing, Additional</td><td>Power Factor Test,0.8,3Ph Only</td></tr> </table> <p>Lit Kit, General Maint, 250REOZJE</p>	Literature Languages	English	Approvals and Listings	UL2200 Listing	Engine	250REOZJE, 24V, 60Hz	Nameplate Rating	Standby 130C Rise	Voltage	60Hz, 120/208V, Wye, 3Ph, 4W	Alternator	4UA10	Cooling System	Unit Mounted Radiator, 50C	Skid and Mounting	Skid/Tank	Air Intake	Standard Duty	Controller	APM402	Enclosure Type	Sound	Enclosure Material	Steel	Enclosure Silencer	Internal Silencer	Fuel Tank Type	Standard	Fuel Runtime (Approx.)	24 Hours	Subbase Fuel Tank Capacity	472 Gallons	Fuel Tank Options	Inner Tank Leak Alarm	Starting Aids, Installed	2500W,90-120V,1Ph,w/Valves	Electrical Accy.,Installed	Battery, 2/12V, Wet	Electrical Accy.,Installed	Battery Charger, 10A	Electrical Accy.,Installed	Run Relay	Electrical Accy.,Installed	2 Input/5 OutputModule	Rating, LCB 1	100% Rated	Amps, LCB 1	1000	Trip Type, LCB 1	Electronic, LSI	Interrupt Rating LCB 1	35kA at 480V	Fuel Lines, Installed	Flexible Fuel Lines	Exceeds LTL Shipping Height	Add'l Shipping Charge Accepted	Miscellaneous Accy,Installed	Coolant in Genset	Warranty	5 Year Comprehensive	Testing, Additional	Power Factor Test,0.8,3Ph Only
Literature Languages	English																																																														
Approvals and Listings	UL2200 Listing																																																														
Engine	250REOZJE, 24V, 60Hz																																																														
Nameplate Rating	Standby 130C Rise																																																														
Voltage	60Hz, 120/208V, Wye, 3Ph, 4W																																																														
Alternator	4UA10																																																														
Cooling System	Unit Mounted Radiator, 50C																																																														
Skid and Mounting	Skid/Tank																																																														
Air Intake	Standard Duty																																																														
Controller	APM402																																																														
Enclosure Type	Sound																																																														
Enclosure Material	Steel																																																														
Enclosure Silencer	Internal Silencer																																																														
Fuel Tank Type	Standard																																																														
Fuel Runtime (Approx.)	24 Hours																																																														
Subbase Fuel Tank Capacity	472 Gallons																																																														
Fuel Tank Options	Inner Tank Leak Alarm																																																														
Starting Aids, Installed	2500W,90-120V,1Ph,w/Valves																																																														
Electrical Accy.,Installed	Battery, 2/12V, Wet																																																														
Electrical Accy.,Installed	Battery Charger, 10A																																																														
Electrical Accy.,Installed	Run Relay																																																														
Electrical Accy.,Installed	2 Input/5 OutputModule																																																														
Rating, LCB 1	100% Rated																																																														
Amps, LCB 1	1000																																																														
Trip Type, LCB 1	Electronic, LSI																																																														
Interrupt Rating LCB 1	35kA at 480V																																																														
Fuel Lines, Installed	Flexible Fuel Lines																																																														
Exceeds LTL Shipping Height	Add'l Shipping Charge Accepted																																																														
Miscellaneous Accy,Installed	Coolant in Genset																																																														
Warranty	5 Year Comprehensive																																																														
Testing, Additional	Power Factor Test,0.8,3Ph Only																																																														
2																																																															



Spec Sheets

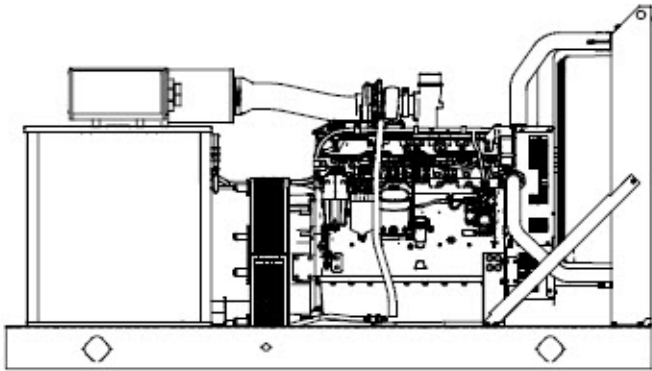

Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- Approved for use with certified renewable Hydrotreated Vegetable Oil (HVO) / Renewable Diesel (RD) fuels compliant with EN15940/ASTM D975.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- The 60 Hz generator set offers a UL 2200 listing.
- The generator set accepts rated load in one step.
- The 60 Hz generator set meets NFPA 110, Level 1, when equipped with the necessary accessories and installed per NFPA standards.
- The generator set complies with ISO 8528-5, Class G2, requirements for transient performance in all generator set configurations. Select the Decision-Maker 550 controller for improved voltage regulation and ISO 8528-5, Class G3, compliance.
- The 60 Hz generator set engine is certified by the Environmental Protection Agency (EPA) to conform to Tier 3 nonroad emissions regulations.
- A one-year limited warranty covers all systems and components. Two-, five-, and ten-year extended warranties are also available.
- Tier 3 EPA-Certified for Stationary Emergency Applications
- Alternator Protection
- Battery Rack and Cables
- Customer Connection box with field-connection terminal blocks.
- Local Emergency Stop Switch
- Oil Drain Extension
- Operation and Installation Literature

Alternator Features

- The unique Fast-Response™ II excitation system delivers excellent voltage response and short circuit capability using a permanent magnet (PM)-excited alternator.
- The brushless, rotating-field alternator has broad range reconnectability.

Other Features

- Kohler designed controllers for one-source system integration and remote communication.
- The low coolant level shutdown prevents overheating (standard on radiator models only). Integral vibration isolation eliminates the need for under-unit vibration spring isolators.
- Mount up to three circuit breakers to allow circuit protection of selected priority loads.

Alternator	Voltage	Ph	Hz	Peak kVA	kW/kVA	Amps
4UA10	120/208	3	60	590	250/313	867

RATINGS: All three-phase units are rated at 0.8 power factor. All single-phase units are rated at 1.0 power factor.

Standby Ratings: Standby ratings apply to installations served by a reliable utility source. The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. Ratings are in accordance with ISO-3046/1, BS5514, AS2789, and DIN 6271.

Prime Power Ratings: Prime power ratings apply to installations where utility power is unavailable or unreliable. At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528/1, overload power in accordance with ISO-3046/1, BS 5514, AS 2789, and DIN 6271. For limited running time and base load ratings, consult the factory.

Obtain the technical information bulletin (TIB-101) on ratings guidelines for the complete ratings definitions.

The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

GENERAL GUIDELINES FOR DERATION: Altitude: Derate 0.5% per 100 m (328 ft.) elevation above 1000 m (3300 ft.). Temperature: Derate 1.0% per 10°C (18°F) temperature above 25°C (77°F).

Model: 250REOZJE, continued

Alternator Specifications

Specifications	Alternator
Alternator manufacturer	Kohler
Type	4-Pole, Rotating-Field
Exciter type	Brushless, Permanent-Magnet
Leads, quantity	12, Reconnectable
Voltage regulator	Solid State, Volts/Hz
Insulation	NEMA MG1
Insulation: Material	Class H
Insulation: Temperature Rise	130 ° C, Standby
Bearing: quantity, type	1, Sealed
Coupling	Flexible Disc
Amortisseur windings	Full
Voltage regulation, no-load to full-load Permanent magnet (PM) alternator	+/-2% Average
550 controller (with 0.5% drift due to temperature variation)	3-Phase Sensing, +/-0.25%
One-Step Load Acceptance	100% of rating
Unbalanced load capability	100% of Rated Standby Current
<ul style="list-style-type: none">• NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting.• Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.• Sustained short-circuit current enabling down stream circuit breakers to trip without collapsing the alternator field.• Self-ventilated and dripproof construction.• Vacuum-impregnated windings with fungus-resistant epoxy varnish for dependability and long life.• Superior voltage waveform from a two-thirds pitch stator and skewed rotor.• Fast-Response™ II brushless alternator with brushless exciter for excellent load response.	

Engine

Engine Specification

Engine Manufacturer	John Deere
Engine Model	6090HF484B
Engine: type	4-Cycle, Turbocharged, Charge Air Cooled
Cylinder arrangement	6, Inline
Displacement, L (cu. in.)	9.0 (548)
Bore and stroke, mm (in.)	118.4 x 136 (4.66 x 5.35)
Compression ratio	16.0:1
Piston speed, m/min. (ft./min.)	457 (1500)
Main bearings: quantity, type	7, Replaceable Insert
Rated rpm	1800
Max. power at rated rpm, kWm (BHP)	287 (385)
Cylinder head material	Cast Iron
Crankshaft material	Forged Steel
Valve (exhaust) material Intake	Chromium-Silicon Steel
Valve (exhaust) material	Stainless Steel
Governor: type, make/model	JDEC Electronic, L14 Denso HP4
Frequency regulation, no-load to-full load	Isochronous
Frequency regulation, steady state	± 0.25%
Frequency	Fixed
Air cleaner type, all models	Dry

Model: 250REOZJE, continued

Exhaust

Exhaust System

Exhaust Manifold Type	Dry
Exhaust flow at rated kW,m3/min. (cfm)	54.1 (1911)
Exhaust temperature at rated kW, dry exhaust, ° C (° F)	625 (1157)
Maximum allowable back pressure, kPa (in. Hg)	Min. 0 (0) Max. 7.5 (2.2)
Exh. outlet size at eng. hookup, mm (in.)	98 (3.86)

Engine Electrical

Engine Electrical System

Battery charging alternator	24 Volt
Battery charging alternator: Ground (negative/positive)	Negative
Battery charging alternator: Volts (DC)	24
Battery charging alternator: Ampere rating	60
Starter motor rated voltage (DC)	24
Battery, recommended cold cranking amps (CCA): Qty., CCA rating each	Two, 925
Battery voltage (DC)	12

Fuel

Fuel System

Fuel type	Diesel
Fuel supply line, min. ID, mm (in.)	11.0 (0.044)
Fuel return line, min. ID, mm (in.)	6.0 (0.25)
Max. lift, fuel pump: type, m (ft.)	Electronic, 3(10)
Max. fuel flow, Lph (gph)	240 (63.4)
Fuel prime pump	Electronic
Fuel Filter Secondary	2 Microns @ 98% Efficiency
Fuel Filter Primary	10 Microns
Fuel Filter Water Separator	Yes
Recommended fuel	#2 Diesel/HVO/RD

Lubrication

Lubrication System

Type	Full Pressure
Oil pan capacity, L (qt.)	32.5 (34.4)
Oil pan capacity with filter, L (qt.)	33.4 (35.3)
Oil filter: quantity, type	1, Cartridge
Oil cooler	Water-cooled

Model: 250REOZJE, continued

Cooling

Radiator System

Ambient temperature, ° C (° F)	50 (122)
Engine jacket water capacity, L (gal.)	16 (4.25)
Radiator system capacity, including engine, L (gal.)	36 (9.5)
Engine jacket water flow, Lpm (gpm)	265 (70)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	97 (5521)
Heat rejected to air charge cooler at rated kW, dry exhaust, kW (Btu/min.)	70.5 (4013)
Water pump type	Centrifugal
Fan diameter, including blades, mm (in.)	863.6 (34.0)
Fan, kWm (HP)	9.0 (12.1)
Max. restriction of cooling air, intake and discharge side of radiator, kPA (in. H2O)	0.125 (0.5)

Operation Requirements

Air Requirements

Radiator-cooled cooling air, m3/min. (scfm) *	368.1 (13000)
Combustion air, m3/min. (cfm)	21.8 (770)
Heat rejected to ambient air: Engine, kW (Btu/min.)	53.8 (3060)
Heat rejected to ambient air: Alternator, kW (Btu/min.)	20.6 (1170)

*Air density = 1.20 kg/m3 (0.075 lbm/ft3)


Fuel Consumption

Diesel, Lph (gph), at % load	Rating
Standby Fuel Consumption at 100% load	66.5 Lph (17.6 gph)
Standby Fuel Consumption at 75% load	50.4 Lph (13.3 gph)
Standby Fuel Consumption at 50% load	35.0 Lph (9.2 gph)
Standby Fuel Consumption at 25% load	20.5 Lph (5.4 gph)
Prime Fuel Consumption at 100% load	59.1 Lph (15.6 gph)
Prime Fuel Consumption at 75% load	45.3 Lph (12.0 gph)
Prime Fuel Consumption at 50% load	31.6 Lph (8.3 gph)
Prime Fuel Consumption at 25% load	18.4 Lph (4.9 gph)
Continuous Fuel Consumption at 0% load	Fuel consumption is up to 4% higher when using HVO/RD than #2 ULSD.

Dimensions and Weights

Dim Weight Spec	Dim Weight Value
Fuel	Diesel
Engine Manufacturer	Diesel
Overall Size, L x W x H, mm (in.): Wide Skid	3000 x 1300 x 1891 (118.1 x 51.2 x 74.4)
Weight (radiator model), wet, kg (lb.):	2268-2449 (5000-5400)

Model: 250REOZJE, continued

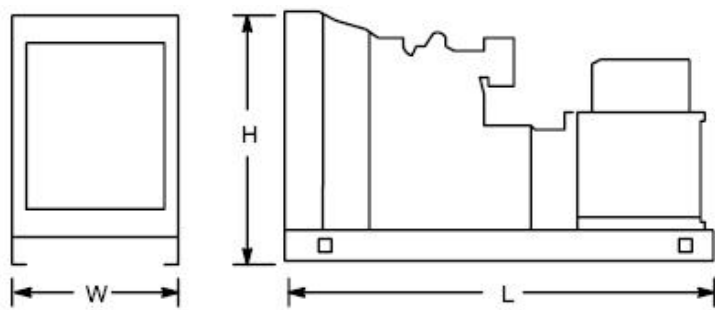

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

Kohler® APM402 Controller

General Description and Function

The APM402 generator set controller provides advanced control, system monitoring, and system diagnostics for optimum performance.

The APM402 controller meets NFPA 110, Level 1 when equipped with the necessary accessories and installed per NFPA standards.


The APM402 controller uses a patented hybrid voltage regulator and unique software logic to manage alternator thermal overload protection features normally requiring additional hardware. Additional features include:

- A digital display and pushbutton/rotary selector dial provide easy local access to data.
- Measurements selectable in metric or English units.
- The controller can communicate directly with a personal computer via a network or serial configuration using SiteTech™ or Monitor III software.
- The controller supports Modbus® protocol. Use with serial bus or Ethernet networks. (Ethernet requires an external Modbus®/Ethernet converter module.)
- Scrolling display shows critical data at a glance.
- Digital display of power metering (kW and kVA).
- Integrated hybrid voltage regulator providing $\pm 0.5\%$ regulation.
- Built-in alternator thermal overload protection.

Modbus® is a registered trademark of Schneider Electric.



APM402

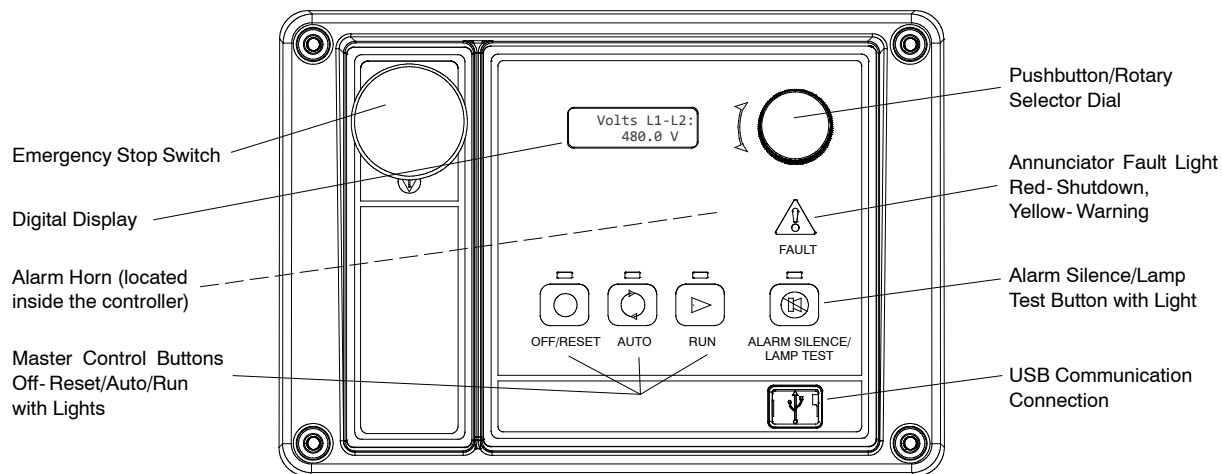

User Interface Controls and Components

- Emergency stop switch
- Backlit LCD digital display with two lines of 12 characters
(see *User Interface Displays for menus*)
- Alarm horn indicates generator set shutdown and warning faults
- Environmentally sealed membrane keypad with three master control buttons with lights
 - Off/Reset (red)
 - Auto (green)
 - Run (yellow)
- Pushbutton/rotary selector dial for menu navigation
 - Rotate dial to access main menus
 - Push dial and rotate to access sub menus
 - Press dial for 3 seconds to return to top of main menu
- Annunciator fault light
 - System shutdown (red)
 - System warning (yellow)
- Alarm silence/lamp test button
 - Alarm silence
 - Lamp test
- USB and RS-485 connections
 - Allows software upgrades
 - Provides access for diagnostics
 - PC communication using SiteTech™ or Monitor III software
- Dedicated user inputs
 - Remote emergency stop switch
 - Remote 2-wire start for transfer switch
 - Auxiliary shutdown
- Integrated hybrid voltage regulator
- Auto-resettable circuit protection mounted on circuit board.
- One relay output standard. Optional five relay output available.
- One analog and three digital inputs standard. Optional two inputs available.

NFPA 110 Requirements

In order to meet NFPA 110, Level 1 requirements, the generator set controller monitors the engine/generator functions/faults shown below.

- Engine functions:
 - Overcrank
 - Low coolant temperature warning
 - High coolant temperature warning
 - High coolant temperature shutdown
 - Low oil pressure shutdown
 - Low oil pressure warning
 - High engine speed
 - Low fuel (level or pressure) *
 - Low coolant level
 - EPS supplying load
 - High battery voltage
 - Low battery voltage
- General functions:
 - Master switch not in auto
 - Battery charger fault *
 - Lamp test
 - Contacts for local and remote common alarm
 - Audible alarm silence button
 - Remote emergency stop *

* Function requires optional input sensors or kits and is engine dependent, see Controller Displays as Provided by the Engine ECM.

User Interface Displays

The listing below has ● denoting main menus and ○ denoting sub-menus.

- Overview
 - Software version
 - Active shutdowns and warnings (if any are present)
 - Engine run time, total hours
 - Average voltage line-to-line
 - Frequency
 - Average current
 - Coolant temperature
 - Fuel level or pressure *
 - Oil pressure
 - Battery voltage
- Engine Metering
 - Engine speed
 - Oil pressure
 - Coolant temperature
 - Battery voltage
- Generator Metering
 - Total power, VA
 - Total power, W
 - Rated power, %
 - Voltage, L- L and L- N for all phases
 - Current, L1, L2, L3
 - Frequency
- GenSet Information
 - Generator set model number
 - Generator set serial number
 - Controller serial number
- GenSet Run Time
 - Engine run time, total hours
 - Engine loaded, hours
 - Number of engine starts
 - Total energy, kWh
- GenSet System
 - System voltage
 - System frequency, 50 or 60 Hz
 - System phase, single or three (wye or delta)
 - Power rating, kW
 - Amp rating
 - Power type, standby or prime
 - Measurement units, metric or English (user selectable)
 - Alarm silence, always or auto only (NFPA 110)
 - Manual speed adjust *
- GenSet Calibration
 - Voltage, L- L and L- N for all phases
 - Current, L1, L2, L3
 - Reset calibration
- Voltage Regulation
 - Adjust voltage, ±10%
- Digital Inputs
 - Input settings and status
- Digital Outputs
 - Output settings and status
- Analog Inputs
 - Input settings and status
- Event Log
 - Event history (stores up to 1000 system events)
- Selector Switch (requires initial activation by SiteTech™)

Controller Features

- **AC Output Voltage Regulator Adjustment.** The voltage adjustment provides a maximum of $\pm 10\%$ of the system voltage.
- **Alarm Silence.** The controller can be set up to silence the alarm horn only when in the AUTO mode for NFPA-110 application or Always for user convenience.
- **Alternator Protection.** The controller provides generator set overload and short circuit protection matched to each alternator for the particular voltage/phase configuration.
- **Automatic Restart.** The controller automatic restart feature initiates the start routine and recrank after a failed start attempt.
- **Common Failure Relay.** This relay is integrated on the controller circuit board. Contacts are rated 2 amps at 32 VDC or 0.5 amp at 120 VAC.
- **Communication.** Controller communication is available.
- **Cyclic Cranking.** The controller has programmable cyclic cranking.
- **ECM Diagnostics.** The controller displays engine ECM fault code descriptions to help in engine troubleshooting.
- **Engine Start Aid.** The starting aid feature provides control for an optional engine starting aid.
- **Event Logging.** The controller keeps a record (up to 1000 entries) for warning and shutdown faults. This fault information becomes a stored record of system events and can be reset.
- **Historical Data Logging.** Total number of generator set successful starts is recorded and displayed.
- **Integrated Hybrid Voltage Regulator.** The voltage regulator provides $\pm 0.5\%$ no-load to full-load regulation with three-phase sensing.
- **Lamp Test.** Press the alarm silence/lamp test button to verify functionality of the indicator lights.
- **LCD Display.** Adjustable contrast for improving visibility.
- **Measurement Units.** The controller provides selection of English or metric displays.
- **Power Metering.** Controller digital display provides kW and kVA.
- **Programming Access (USB).** Provides software upgrades and diagnostics.
- **Remote Reset.** The remote reset function resets faults and allows restarting of the generator set without going to the master control switch off/reset position.
- **Remote Monitoring Panel.** The controller is compatible with the Kohler® Remote Serial Annunciator.
- **Run Time Hourmeter.** The generator set run time is displayed.
- **Time Delay Engine Cooldown (TDEC).** The TDEC provides a time delay before the generator set shuts down.
- **Time Delay Engine Start (TDES).** The TDES provides a time delay before the generator set starts.
- **Voltage Selection Menu.** This menu provides the capability of quickly switching controller voltage calibrations. Requires initial activation using SiteTech™ software. **NOTE:** Generator set output leads require voltage reconnection.

Controller Functions

The following chart shows which functions cause a warning or shutdown. All functions are available as relay outputs.

Warning causes the fault light to show yellow and sounds the alarm horn signaling an impending problem.

Shutdown causes the fault light to show red, sounds the alarm horn, and stops the generator set.

	Warning Function	Shutdown Function
Engine Functions		
Critically high fuel level *	○	
ECM communication loss		●
ECM diagnostics	●	●
Engine over speed		●†
Engine start aid active		
Engine under speed		●
Fuel tank leak *	○	○
High battery voltage	●	
High coolant temperature	●	●†
High fuel level *	○	
Low battery voltage	●	
Low coolant level		●
Low coolant temperature	●	
Low cranking voltage	●	
Low engine oil level *	○	○
Low fuel level (diesel models) *	○	○
Low fuel pressure (gas models) *	○	
Low oil pressure	●	●†
No coolant temperature signal		●
No oil pressure signal		●
Overcrank		●†
Speed sensor fault	●	
General Functions		
Alarm horn silenced		
Analog inputs	○	○
Battery charger fault *	●	
Chicago code active *		
Common fault (includes †)		●
Common warning	●	
Digital inputs	○	○
Emergency stop		●†
Engine cooldown (delay) active		
Engine start delay active		
Engine started		
Engine stopped		
EPS supplying load		
Generator running		
Input/output communication loss	●	
Internal failure		●
Master switch not in auto	●	
NFPA 110 alarm active		
Remote start		
System ready		
Generator Functions		
AC sensing loss	●	●
Alternator protection		●
Ground fault input *	●	
kW overload		●
Locked rotor		●
Overfrequency		●
Overvoltage (each phase)		●
Underfrequency		●
Undervoltage (each phase)		●

● Standard function

○ Available user function

* Function requires optional input sensors or kits and is engine dependent; see Controller Displays as Provided by the Engine ECM.

† Items included with common fault shutdown



KOHLER CO., Kohler, Wisconsin 53044 USA
Phone 920-457-4441, Fax 920-459-1646
For the nearest sales and service outlet in the
US and Canada, phone 1-800-544-2444
KOHLERPower.com

Controller Displays as Provided by the Engine ECM	Engine Manufacturer (and Model)						
	Kohler Diesel (KDI M, TM*)	Kohler Diesel (KDI TCR)	Kohler Gas (KG2204, KG2204T)	Kohler Gas (KG6208, KG6208T, KG10V08, KG10V08T)	GM and PSI/Doosan	John Deere	Volvo
Intake air pressure							D
Intake air Temperature		D		D	D	D	D
Coolant level			D	D	D	D	D
Coolant temperature		D	C/S/D	C/S/D	C/S/D	C/S/D	C/S/D
Crankcase pressure							D
ECM battery voltage	S		S/D	S	S		
Engine speed	C/S/D	C/S/D	C/S/D	C/S/D	C/S/D	C/S/D	C/S/D
Fuel pressure		D		C/S/D	C/S/D	C/S†	C/S/D
Fuel temperature		D				S/D	S
Oil level				S†	S†	S†	S†
Oil pressure		C/S/D	D	C/S/D	C/S/D	C/S/D	C/S/D
Oil temperature			S				SD
C = Value displayed on controller, S = Value displayed in Site Tech, D = ECU diagnostic is supported							
* Electronic governor and ECM are optional on KDI M and TM engines.							
† Controller uses local analog input to obtain this information.							

Note: REOZMD/ROZMC (Mitsubishi engines) have an ECM but do not send signals to the generator set controller.

Note: See the generator set specification sheet for engine model identification.

Controller Specifications

- Power source with circuit protection: 12- or 24-volt DC
- Power drain: 200 milliamps at 12 VDC or 100 milliamps at 24 VDC
- Humidity range: 5% to 95% noncondensing
- Operating temperature range: -40°C to +70°C (-40°F to +158°F)
- Storage temperature range: -40°C to +85°C (-40°F to +185°F)
- Standards:
 - CE Directive
 - NFPA 99
 - NFPA 110, Level 1
 - CSA 282-09
 - UL 508
 - ASTM B117 (salt spray test)
- Panel dimensions—W x H, 229 x 160 mm (9.0 x 6.3 in.)

Communication and PC Software Available Options

Refer to G6-76 Monitor III Software and the communication literature for additional communication and PC software information including Modbus® communication.

- ☐ **Monitor III Software for Monitoring and Control (Windows®-based user interface)**
- ☐ **Converter, Modbus®/Ethernet.** Supports a power system using controllers accessed via the Ethernet. Converter is supplied with an IP address by the site administrator. Refer to G6-79 for converter details.
- ☐ **Converter, RS-232/RS-485.** Supports a power system using controllers accessed via a serial (RS-232) connection.

APM402 Available Options

- ☐ **Float/Equalize Battery Charger** available with 6 or 10 amp output for 12 or 24V DC voltage output. The 10 amp model provides NFPA 110 charging and alarming capability.
- ☐ **Manual Speed Adjust** available for applications using closed transition ATS. Adjustment range for 60 Hz: 1751- 1849 rpm (58.2- 61.8 Hz) and for 50 Hz: 1451- 1549 rpm (48.2- 51.8 Hz).
- ☐ **Prime Power Switch** prevents battery drain during generator set non-operation periods and when the generator set battery cannot be maintained by an AC battery charger.
- ☐ **Remote Emergency Stop Switch** available as a wall mounted panel to remotely shut down the generator set.
- ☐ **Remote Monitoring Panel.** The Kohler® Remote Serial Annunciator (RSA) enables the operator to monitor the status of the generator set from a remote location, which may be required for NFPA 99 and NFPA 110 installations, and up to four Automatic transfer switches.
- ☐ **Run Relay** provides a relay indicating that the generator set is running.
- ☐ **Shunt Trip Wiring** provides relay outputs to trip a shunt trip circuit breaker and to signal the common fault shutdowns. Contacts rated at 10 amps at 28 VDC or 120 VAC.
- ☐ **Two Input/Five Output Module** provides a generator set mounted panel with two inputs and five relay outputs.


Windows® is a registered trademark of Microsoft Corporation.

Modbus® is a registered trademark of Schneider Electric.


DISTRIBUTED BY:

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler® generator set distributor for availability.


© 2018 Kohler Co., All rights reserved.

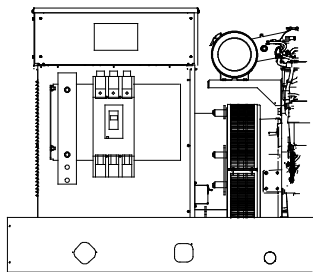


Single Circuit Breaker Kit with Neutral Bus Bar
15-300 kW Model Shown

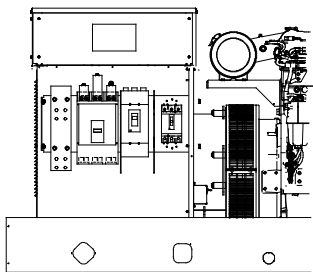

Multiple Circuit Breaker Kit with Neutral Bus Bar
180-300 kW Model Shown

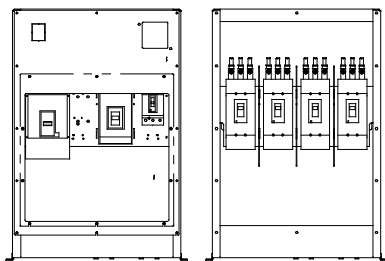

Multiple Circuit Breaker Kits with Neutral Bus Bar
350-2250 kW Model Shown
(also applies to some 300 kW models)

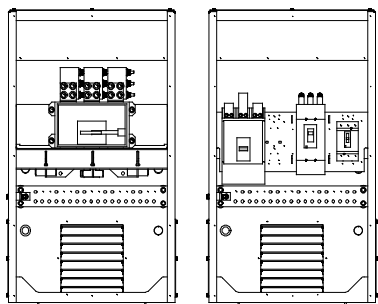

Circuit Breaker Kits with Neutral Bus Bar
800-2500 kW KD Model Shown

Standard Features

- The line circuit breaker interrupts the generator set output during a short circuit and protects the wiring when an overload occurs. Use the circuit breaker to manually disconnect the generator set from the load during generator set service.
- Circuit breaker kits are mounted to the generator set and are provided with load-side lugs and neutral bus bar.
- Kohler Co. offers a wide selection of molded-case line circuit breaker kits including single, dual, and multiple configurations for each generator set.
- Four types of line circuit breakers are available: (see page 2 for definitions and pages 3 and 4 for application details)
 - Magnetic trip
 - Thermal magnetic trip
 - Electronic trip
 - Electronic with ground fault (LSIG) trip
- In addition, line circuit breakers are offered with 80% and 100% ratings.
- Single line circuit breaker kits allow circuit protection of the entire electrical system load.
- Dual line circuit breaker kits allow circuit protection of selected priority loads from the remaining electrical system load.
- Multiple line circuit breaker kits with field connection barrier allow circuit protection for special applications (350- 2500 kW models and selected 80- 300 kW models).
- Up to four line circuit breakers can be used on 350- 2500 kW models.
- Line circuit breakers comply with the following codes and standards unless otherwise stated.
 - UL 489 Molded Case Circuit Breakers
 - UL 1077 Supplementary Protectors
 - UL 2200 Stationary Engine Generator Assemblies

Line Circuit Breaker Types

Magnetic Trip

The magnetic trip features an electromagnet in series with the load contacts and a moveable armature to activate the trip mechanism. When a sudden and excessive current such as a short circuit occurs, the electromagnet attracts the armature resulting in an instantaneous trip.

Thermal Magnetic Trip

Thermal magnetic trip contains a thermal portion with a bimetallic strip that reacts to the heat produced from the load current. Excessive current causes it to bend sufficiently to trip the mechanism. The trip delay is dependent on the duration and excess of the overload current. Elements are factory-calibrated. A combination of both thermal and magnetic features allows a delayed trip on an overload and an instantaneous trip on a short circuit condition.

Electronic Trip

These line circuit breakers use electronic controls and miniature current transformers to monitor electrical currents and trip when preset limits are exceeded.

LI breakers are a combination of adjustable trip functions including long-time ampere rating, long-time delay, and instantaneous pickup. LSI breakers have all of the LI breaker features plus short-time pickup, short-time delay, and defeatable instantaneous pickup. LSI breakers have all of the LSI breaker features plus ground-fault pickup and delay.

NOTE: MG-frame does not have a long-time delay when selected with LI breakers.

Electronic with Ground Fault Trip

The ground fault trip feature is referred to as LSIg in this document. Models with LSIg compare current flow in phase and neutral lines, and trip when current unbalance exists.

Ground fault trip units are an integral part of the circuit breaker and are not available as field-installable kits. The ground fault pickup switch sets the current level at which the circuit breaker will trip after the ground fault delay. Ground fault pickup values are based on circuit breaker sensor plug only and not on the rating plug multiplier. Changing the rating plug multiplier has no effect on the ground fault pickup values.

80% Rated Circuit Breaker

Most molded-case circuit breakers are 80% rated devices. An 80% rated circuit breaker can only be applied at 80% of its rating for continuous loads as defined by NFPA 70. Circuit conductors used with 80% rated circuit breakers are required to be rated for 100% of the circuit breaker's rating.

The 80% rated circuit breakers are typically at a lower cost than the 100% rated circuit breaker but load growth is limited.

100% Rated Circuit Breaker

Applications where all UL and NEC restrictions are met can use 100% rated circuit breakers where 100% rated circuits can carry 100% of the circuit breaker and conductor current rating.

The 100% rated circuit breakers are typically at a higher cost than the 80% rated circuit breaker but have load growth possibilities.

When applying 100% rated circuit breakers, comply with the various restrictions including UL Standard 489 and NEC Section 210. If any of the 100% rated circuit breaker restrictions are not met, the circuit breaker becomes an 80% rated circuit breaker.

Line Circuit Breaker Options

☐ Alarm Switch

The alarm switch indicates that the circuit breaker is in a tripped position caused by an overload, short circuit, ground fault, the operation of the shunt trip, an undervoltage trip, or the push-to-trip pushbutton. The alarm resets when the circuit breaker is reset.

☐ Auxiliary Contacts

These switches send a signal indicating whether the main circuit breaker contacts are in the open or closed position.

☐ Breaker Separators (350- 2500 kW)

Provides adequate clearance between breaker circuits.

☐ Bus Bars

Bus bar kits offer a convenient way to connect load leads to the generator set when a circuit breaker is not present.

15- 300 kW. Bus bar kits are available on alternators with leads for connection to the generator set when circuit breakers are not ordered.

350- 2500 kW. A bus bar kit is provided when no circuit breaker is ordered. Bus bars are also available in combination with circuit breakers or other bus bars on the opposite side of the junction box. On medium voltage (3.3 kV and above) units, a bus bar kit is standard (not applicable to KD models).

☐ Field Connection Barrier

Provides installer wiring isolation from factory connections.

☐ Ground Fault Annunciation

A relay contact for customer connection indicates a ground fault condition and is part of a ground fault alarm.

☐ Lockout Device (padlock attachment)

This field-installable handle padlock attachment is available for manually operated circuit breakers. The attachment can accommodate three padlocks and will lock the circuit breaker in the OFF position only.

☐ Lugs

Various lug sizes are available to accommodate multiple cable sizes for connection to the neutral or bus bar.

☐ Overcurrent Trip Switch

The overcurrent trip switch indicates that the circuit breaker has tripped due to overload, ground fault, or short circuit and returns to the deenergized state when the circuit breaker is reset.

☐ Shunt Trip, 12 VDC or 24 VDC

A shunt trip option provides a solenoid within the circuit breaker case that, when momentarily energized from a remote source, activates the trip mechanism. This feature allows the circuit breaker to be tripped by customer-selected faults such as alternator overload or overspeed. The circuit breaker must be reset locally after being tripped. Tripping has priority over manual or motor operator closing.

☐ Shunt Trip Wiring

Connects the shunt trip to the generator set controller. (standard on KD models with the APM802 controller)

☐ Undervoltage Trip, 12 VDC or 24 VDC

The undervoltage trips the circuit breaker when the control voltage drops below the preset threshold of 35%- 70% of the rated voltage.

15- 300* kW Line Circuit Breaker Specifications

* Includes models 300REOZJ and 300REZXC. For other 300 kW models, see the 350- 2250 kW section.

80% Rating Circuit Breaker

Alt. Model	Ampere Range	Trip Type	C. B. Frame Size
4D/4E	15- 150	Thermal magnetic	HD
		Electronic LI	
	60- 150	Electronic LSI	
		Electronic LSIG	
	60- 150	Electronic LI	HG
		Electronic LSI	
		Electronic LSIG	
4P/4PX/ 4Q/4QX	30- 100	Magnetic, UL 1077	E (480 V max.)
		Magnetic, UL 1077 with 12 V shunt trip	
		Magnetic, UL 1077 with 24 V shunt trip	
	15- 150	Thermal magnetic	HD
		Electronic LI	
		Electronic LSI	
		Electronic LSIG	
	60- 150	Electronic LI	HG
		Electronic LSI	
		Electronic LSIG	
	30	Magnetic 9- 325	HJ
		Magnetic 84- 546	
		Magnetic 180- 1040	
		Magnetic 348- 1690	
	175- 250	Thermal magnetic	JD
		Electronic LI	
		Electronic LSI	
		Electronic LSIG	
	250	Electronic LI	JG
		Electronic LSI	
		Electronic LSIG	
	250	Magnetic only 684- 2500	JJ
	300- 400	Thermal magnetic	LA
	400	Magnetic 500- 1000	LA
		Magnetic 750- 1600	
		Magnetic 1000- 2000	
		Magnetic 1125- 2250	
		Magnetic 1250- 2500	
		Magnetic 1500- 3000	
		Magnetic 1750- 3500	
	400	Electronic LI	LG
		Electronic LSI	
		Electronic LSIG	
4RX 4S/4SX 4TX 4V	30- 100	Magnetic, UL 1077	E (480 V max.)
		Magnetic, UL 1077 with 12 V shunt trip	
		Magnetic, UL 1077 with 24 V shunt trip	
	30- 100		

Alt. Model	Ampere Range	Trip Type	C. B. Frame Size
4RX 4S/4SX 4TX/4V 4UA 4M6226	15- 150	Thermal magnetic	HD
		Electronic LI	
	60- 150	Electronic LSI	
		Electronic LSIG	
	60- 150	Electronic LI	HG
		Electronic LSI	
		Electronic LSIG	
	30	Magnetic 9- 325	HJ
		Magnetic 84- 546	
		Magnetic 180- 1040	
		Magnetic 348- 1690	
	175- 250	Thermal magnetic	JD
		Electronic LI	
	250	Electronic LSI	
		Electronic LSIG	
	250	Electronic LI	JG
		Electronic LSI	
		Electronic LSIG	
	250	Magnetic only 684- 2500	JJ
	300- 400	Thermal magnetic	LA
	400	Magnetic 500- 1000	LA
		Magnetic 750- 1600	
		Magnetic 1000- 2000	
		Magnetic 1125- 2250	
		Magnetic 1250- 2500	
		Magnetic 1500- 3000	
	400- 600	Electronic LI	LG
		Electronic LSI	
		Electronic LSIG	
	800	Electronic LSI	PG
		Electronic LSIG	
	800	Electronic LI	MG
4UA 4M6226	1000- 1200	Thermal magnetic	PG
		Electronic LSI	
		Electronic LSIG	
	1200	Thermal Magnetic	PJ
		Electronic LSI	
		Electronic LSIG	

15- 300* kW Line Circuit Breaker Specifications

* Includes models 300REOZJ and 300REZXC. For other 300 kW models, see the 300- 2250 kW section.

100% Rating Circuit Breaker

Alt. Model	Ampere Range	Trip Type	C. B. Frame Size
4D/4E	15- 150	Thermal magnetic	HD
		Electronic LI	
	60- 150	Electronic LSI	
		Electronic LSI SIG	HG
		Electronic LI	
		Electronic LSI	
4P/4PX 4Q/4QX	15- 150	Thermal magnetic	HD
		Electronic LI	
	60- 150	Electronic LSI	
		Electronic LSI SIG	HG
		Electronic LI	
		Electronic LSI	
		Electronic LSI SIG	JD
	175- 250	Thermal magnetic	
		Electronic LI	
		Electronic LSI	JD
	250	Electronic LSI SIG	
		Electronic LI	JG
		Electronic LSI	
		Electronic LSI SIG	LG
	400	Electronic LI	
		Electronic LSI	
		Electronic LSI SIG	
4RX 4S/4SX 4TX 4V 4UA 4M6226	15- 150	Thermal magnetic	HD
		Electronic LI	
	60- 150	Electronic LSI	
		Electronic LSI SIG	HG
		Electronic LI	
		Electronic LSI	
		Electronic LSI SIG	JD
	175- 250	Thermal magnetic	
		Electronic LI	
		Electronic LSI	JG
	250	Electronic LSI SIG	
		Electronic LI	
		Electronic LSI	LG
		Electronic LSI SIG	
	400	Electronic LI	
		Electronic LSI	PG
		Electronic LSI SIG	
4UA 4M6226	1000- 1200	Electronic LSI	PG
		Electronic LSI SIG	
	1200	Electronic LSI	PJ
		Electronic LSI SIG	

100% Rating Electrically Operated Breakers

For use as paralleling breakers with the Decision-Maker® 6000 Controller/DPS System or APM603 controller.

Generator-Mounted P-Frame, 24VDC Electrically Operated			
Alt. Model	Amps	Trip Unit	Frame
4RX 4S/4SX 4TX 4V	250	3.0 LI	PJ
	400	5.0 LSI	PJ
	600	3.0 LI	PL
	800	5.0 LSI	PL
4UA 4M6226	250	3.0 LI	PJ
	400	5.0 LSI	PJ
	600	3.0 LI	PL
	800	5.0 LSI	PL
	1000	3.0 LI	PL
	1200	5.0 LSI	PL
All circuit breakers listed in this table include line side bus and load side lugs, 24VDC motor operators, 2 type C auxiliary contacts, and 1 type C SDE overcurrent switch contact. No second breakers are allowed in combination with these breakers.			

Interrupting Ratings

Circuit Breaker Frame Size	240 Volt, kA	480 Volt, kA	600 Volt, kA
HD	25	18	14
HG	65	35	18
HJ	100	65	25
JD	25	18	14
JG	65	35	18
JJ	100	65	25
LA	42	30	22
LG	65	35	18
MG			
PG	65	35	18
PJ	100	65	25
PL	125	100	25

Circuit Breaker Lugs Per Phase (Al/Cu)


Frame Size	Ampere Range	Wire Range
E (480 V max.)	30- 100	Up to two wire terminals fitting 10-32 or 1/4-20 stud
H	15- 150	One #14 to 3/0
J	175	One 1/0 to 4/0
	200- 250	One 3/0 to 350 kcmil
LA	300- 400	One #1 to 600 kcmil or Two #1 to 250 kcmil
LG	400- 600	Two 2/0 to 500 kcmil AL/CU
M	800	Three 3/0 to 500 kcmil
P	600-800	Three 3/0 to 500 kcmil
	1000-1200	Four 3/0 to 500 kcmil
Mechanical Load Lugs Included with H, J, and LG LSI SIG Neutrals		
H	60- 150	One #14 to 3/0 AL/CU
J	250	One 3/0 to 350 kcmil AL/CU
LG	400- 600	Two 4/0 to 500 kcmil AL/CU

15- 300* kW Line Circuit Breaker Applications

* Includes models 300REOZJ and 300REZXC. For other 300 kW models, see the 300- 2250 kW section.


Single Circuit Breaker Installations

A generator set with a single circuit breaker installed typically feeds a single transfer switch and then a distribution panel. This allows protection of the entire system.

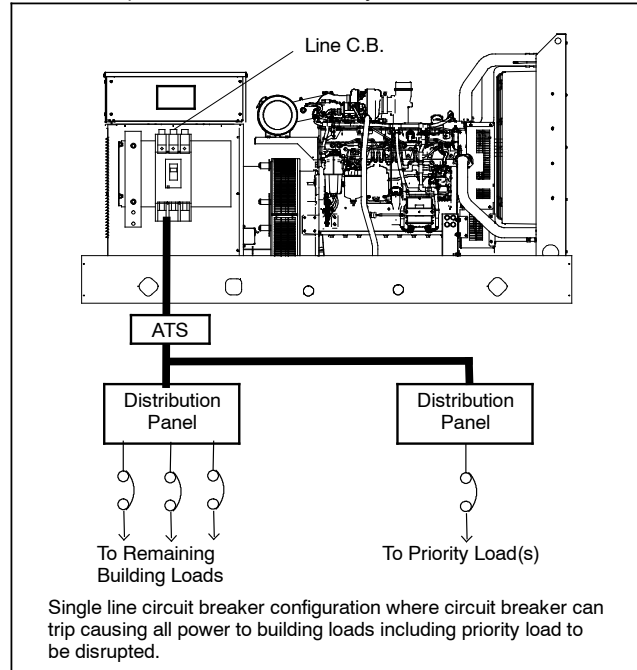

Multiple Circuit Breaker Installations

A generator set with dual circuit breakers installed is used to separate critical loads. Typically, one circuit breaker will feed a main transfer switch with noncritical loads and the other circuit breaker will feed a second transfer switch that feeds critical or priority loads. Multiple circuit breakers allow circuit protection for special applications.

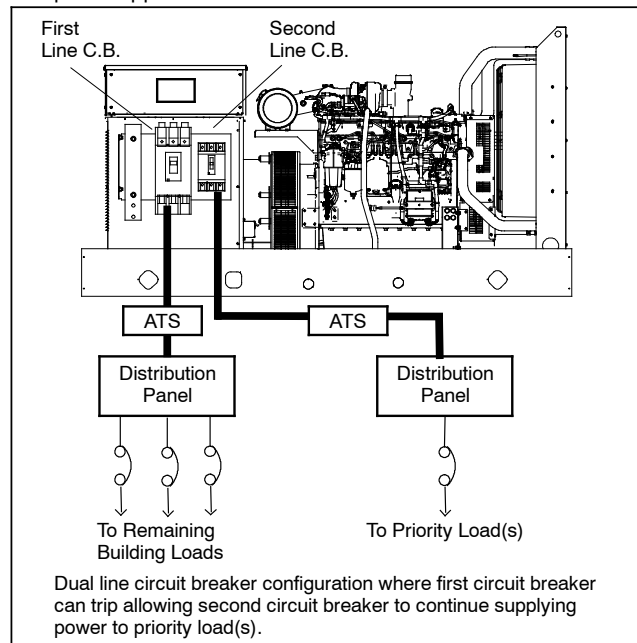

Circuit Breaker Combinations

Alternator Model	First C. B. Frame	Second C. B. Frame	Third C. B. Frame	Trip Type
ALL except 4D/4E	H	—	—	All
	J	—	—	
	LA	—	—	
	LG	—	—	
4D/4E	H	—	—	Standard or LSIG
	H	H	—	No LSIG
4P/4PX 4Q/4QX	H	H or J	—	No LSIG
	J		—	
	LA	H, J or LG	—	
	LG		—	
4RX 4S/4SX 4TX 4V	M	—	—	All
	P	—	—	All
	H or J	H or J	—	No LSIG
	LA	H, J, or LA	—	
	LG	H, J, LA, or LG	—	
	M		—	
	P		—	
	H or J	H or J	H or J	
4UA 4M6226	M or P	—	—	All
	H or J	H or J	—	All
	LA	H, J, or LA	—	
	LG	H, J, LA, or LG	—	
	M or P	H, J, LA, or LG	—	
	P	P	—	
	H or J	H or J	H or J	No LSIG
	LA	H or J	H or J	
		LA	H, J, or LA	
	LG	H or J	H or J	
		LA	H, J, or LA	
	M or P	LG	H, J, LA, or LG	
		H or J	H or J	
		LA	H, J, or LA	
		LG	H, J, or LG	

300- 2250* kW Line Circuit Breaker Specifications

* Includes models 300REZXB and 300RZXB. For models 300REOZJ and 300REZXC, see the 15- 300 kW section. For KD model generator sets, see pages 8 and 9.

80% Rating Circuit Breaker

Alt. Model	Ampere Range	Trip Type	C. B. Frame Size
4M 5M 7M	15- 150	Thermal Magnetic	HD
	60- 150	Electronic LI	HD
		Electronic LSI	
		Electronic LSIG	
	175- 250	Thermal Magnetic	JD
	250	Electronic LI	
		Electronic LSI	
		Electronic LSIG	
	60- 150	Electronic LI	HG
		Electronic LSI	
		Electronic LSIG	
	250	Electronic LI	JG
		Electronic LSI	
		Electronic LSIG	
	30	9- 325 A. Mag. Trip	HJ
	50	84- 546 A. Mag. Trip	
	100	180- 1040 A. Mag. Trip	
	150	348- 1690 A. Mag. Trip	JJ
	250	684- 2500 A. Mag. Trip	
	300- 400	Thermal Magnetic	
	400	500- 1000 A. Mag. Trip	LA
		750- 1600 A. Mag. Trip	
		1000- 2000 A. Mag. Trip	
		1125- 2250 A. Mag. Trip	
		1250- 2500 A. Mag. Trip	
		1500- 3000 A. Mag. Trip	
		1750- 3500 A. Mag. Trip	
		2000- 4000 A. Mag. Trip	
	400- 600	Electronic LI	LG
		Electronic LSI	
		Electronic LSIG	
	800	Electronic LI	MG
	1000- 1200	Thermal Magnetic	PG
	800- 1200	Electronic LSI	
		Electronic LSIG	
	1200	Thermal Magnetic	PJ
		Electronic LSI	
		Electronic LSIG	
	1600- 2500	Thermal Magnetic	RJ
		Electronic LSI	
		Electronic LSIG	

100% Rating Circuit Breaker

Alt. Model	Ampere Range	Trip Type	C. B. Frame Size
4M 5M 7M	15- 150	Thermal Magnetic	HD
	60- 150	Electronic LI	
		Electronic LSI	
		Electronic LSIG	
	175- 250	Thermal Magnetic	JD
	250	Electronic LI	
		Electronic LSI	
		Electronic LSIG	
	60- 150	Electronic LI	HG
		Electronic LSI	
		Electronic LSIG	
	250	Electronic LI	JG
		Electronic LSI	
		Electronic LSIG	
	400	Electronic LI	LG
		Electronic LSI	
		Electronic LSIG	
	600- 1200	Electronic LSI	PG
		Electronic LSIG	
	1200	Electronic LSI	PJ
		Electronic LSIG	
	1600- 2500	Electronic LSI	RJ
		Electronic LSIG	
	1600- 3000	Electronic LSI	NW
		Electronic LSIG	

100% Rating Electrically Operated Breakers

For use as paralleling breakers.*

Alt. Model	Amps	Trip Unit	Frame
4M 5M 7M	250, 400, 600, 800, 1000, 1200	3.0 LI	PJ
		5.0 LSI	PJ
		3.0 LI	PL
		5.0 LSI	PL
	1600, 2000, 2500, 3000	Electronic LSI	NW
		Electronic LSIG	NW

* P-frame breakers can be used with the Decision-Maker® 6000 Controller/DPS System or APM603 controller. NW breakers are for use with the APM603 only.

All circuit breakers listed in this table include line side bus and load side lugs, 24VDC motor operators, and 1 type C SDE overcurrent switch contact. P-frame breakers include 2 type C auxiliary contacts. NW breakers include 4 auxiliary contacts.

No second breakers are allowed in combination with these breakers.

Load Bus Rating

Gen. Set kW	Alt. Model	Rating, Amperes	Type
350- 2250 kW	4M/ 5M/ 7M	3000	Load Bus

300- 2250* kW Line Circuit Breaker Specifications

* Includes models 300REZXB and 300RZXB. For models 300REOZJ and 300REZXC, see the 15- 300 kW section. For KD model generator sets, see pages 8 and 9.


Interrupting Ratings

Circuit Breaker Frame Size	240 Volt, kA	480 Volt, kA	600 Volt, kA
HD	25	18	14
HG	65	35	18
HJ	100	65	25
JD	25	18	14
JG	65	35	18
JJ	100	65	25
LA	42	30	22
LG	65	35	18
MG			
NW	100	100	85
PG	65	35	18
PJ	100	65	25
PL	125	65	25
RJ	100	65	25

Circuit Breaker Lugs Per Phase (Al/Cu)

Frame Size	Ampere Range	Wire Range
H	15- 150	One #14 to 3/0
J	175	One 1/0 to 4/0
	200- 250	One 3/0 to 350 kcmil
LA	300- 400	One #1 to 600 kcmil or Two #1 to 250 kcmil
LG	400- 600	Two 2/0 to 500 kcmil
M	800	Three 3/0 to 500 kcmil
P	600-800	Three 3/0 to 500 kcmil
	1000-1200	Four 3/0 to 500 kcmil
RJ	1600- 2500	(8) 1/0 to 750 kcmil or (16) 1/0 to 300 kcmil
NW	1600- 3000	(10) 1/0 to 750 kcmil or (20) 1/0 to 300 kcmil

Breaker Positions

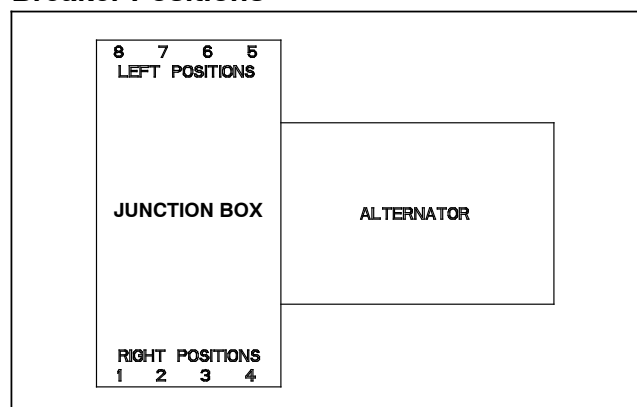

NOTE: Breaker and load bus phasing on right positions is A- B- C and on left positions is C- B- A.

NOTE: H, HG, J, JG, and LG-frames when selected with LSIG trip require two mounting spaces (one space for the breaker and one space for the LSIG neutral). These combinations are not reflected in the Multiple Circuit Breaker Combinations table on this page.

Multiple Circuit Breaker Combinations

Alternator Model	Positions			
	1 or 5	2 or 6	3 or 7	4 or 8
4M/ 5M/ 7M	H/J			
	H/J	H/J		
	H/J	H/J	H/J	
	H/J	H/J	H/J	H/J
	LA			
	LA	H/J		
	LA	LA		
	LA	H/J	H/J	
	LA	LA	H/J	
	LA	H/J	H/J	H/J
	LA	LA	H/J	H/J
	LA	LA	LA	H/J
	LA	LA	LA	LA
	LG			
	LG	H/J		
	LG	LA		
	LG	LG		
	LG	H/J	H/J	
	LG	LA	H/J	
	LG	LA	LA	
	LG	LG	H/J	
	LG	LG	LA	
	LG	LG	LG	
	LG	H/J	H/J	H/J
	LG	LA	H/J	H/J
	LG	LA	LA	H/J
	LG	LA	LA	LA
	LG	LG	H/J	H/J
	LG	LG	LA	LA
	LG	LG	LG	H/J
	LG	LG	LG	LA
	LG	LG	LG	LG †
	M/P			
	M/P		H/J	
	M/P		LA	
	M/P		LG	
	M/P		M/P ‡	
	M/P		H/J	H/J
	M/P		LA	H/J
	M/P		LA	LA
	M/P		LG	H/J
	M/P		LG	LA
	M/P		LG	LG †
	R §			
	NW §			
	LOAD BUS KIT §			

† Frame size LG is not available in position 4 with 1219 mm (48 in.) junction box.

‡ Frame sizes M/P are not available in position 3 or 4 with 1219 mm (48 in.) junction box.

§ R breakers, NW breakers, and the load bus kit occupy all four positions on a side.

800-2500 kW KD Model Line Circuit Breaker Specifications

80% Rating Circuit Breaker

Alt. Model	Ampere Range	Trip Type	C. B. Frame Size
KH	15- 150	Thermal Magnetic	HD
	60- 150	Electronic LI	
		Electronic LSI	
		Electronic LSIG	
	60- 150	Electronic LI	HG
		Electronic LSI	
		Electronic LSIG	
	30	9- 325 A. Mag. Trip	HJ
	50	84- 546 A. Mag. Trip	
	100	180- 1040 A. Mag. Trip	
	150	348- 1690 A. Mag. Trip	
	175- 250	Thermal Magnetic	JD
	250	Electronic LI	
		Electronic LSI	
		Electronic LSIG	
	250	Electronic LI	JG
		Electronic LSI	
		Electronic LSIG	
	250	684- 2500 A. Mag. Trip	JJ
	400	2000-4800 A Mag. Trip	LG
	600	3000- 7200 A Mag. Trip	
	400- 600	Electronic LI	
		Electronic LSI	
		Electronic LSIG	
	800	Electronic LI	MG
	1000- 1200	Thermal Magnetic	PG
	800- 1200	Electronic LSI	
		Electronic LSIG	
	1200	Thermal Magnetic	PJ
		Electronic LSI	
		Electronic LSIG	
	1600- 2500	Thermal Magnetic	RJ
		Electronic LSI	
		Electronic LSIG	

100% Rating Circuit Breaker

Alt. Model	Ampere Range	Trip Type	C. B. Frame Size
KH	15- 150	Thermal Magnetic	HD
	60- 150	Electronic LI	
		Electronic LSI	
		Electronic LSIG	
	60- 150	Electronic LI	HG
		Electronic LSI	
		Electronic LSIG	
	175- 250	Thermal Magnetic	JD
	250	Electronic LI	
		Electronic LSI	
		Electronic LSIG	
	250	Electronic LI	JG
		Electronic LSI	
		Electronic LSIG	
	400	Electronic LI	LG
		Electronic LSI	
		Electronic LSIG	
	600- 1200	Electronic LSI	PG
		Electronic LSIG	
	1200	Electronic LSI	PJ
		Electronic LSIG	
	1600- 2500	Electronic LSI	RJ
		Electronic LSIG	
	1600- 3000	Electronic LSI	NW
		Electronic LSIG	

100% Rating Electrically Operated Breakers

For use as paralleling breakers with the APM603 controller.

Alt. Model	Amps	Trip Unit	Frame
KH	250, 400, 600, 800, 1000, 1200	3.0 LI	PJ
		5.0 LSI	PJ
		3.0 LI	PL
		5.0 LSI	PL
	1600, 2000, 2500, 3000	Electronic LSI	NW
		Electronic LSIG	NW

All circuit breakers listed in this table include line side bus and load side lugs, 24VDC motor operators, and 1 type C SDE overcurrent switch contact. P-frame breakers include 2 type C auxiliary contacts. NW breakers include 4 auxiliary contacts.

No second breakers are allowed in combination with these breakers.

Load Bus Rating

Gen. Set Model	Alt. Model	Rating, Amperes	Type
KD800- KD2500	KH	2000 3000 4000 4500	Load Bus

800-2500 kW KD Model Line Circuit Breaker Specifications


Interrupting Ratings

Circuit Breaker Frame Size	240 Volt, kA	480 Volt, kA	600 Volt, kA
HD	25	18	14
HG	65	35	18
HJ	100	65	25
JD	25	18	14
JG	65	35	18
JJ	100	65	25
LG	65	35	18
MG			
PG			
PJ	100	65	25
RJ			
NW	100	100	85

Circuit Breaker Lugs Per Phase (Al/Cu)

Frame Size	Ampere Range	Wire Range
H	15-150	One #14 to 3/0
J	175	One 1/0 to 4/0
	200-250	One 3/0 to 350 kcmil
LG	400-600	Two 2/0 to 500 kcmil
M	800	Three 3/0 to 500 kcmil
P	600-800	Three 3/0 to 500 kcmil
	1000-1200	Four 3/0 to 500 kcmil
R	1600-2500	(8) 1/0 to 750 kcmil or (16) 1/0 to 300 kcmil
NW	1600-3000	(10) 1/0 to 750 kcmil or (20) 1/0 to 300 kcmil
Mechanical Load Lugs Included with H, J, and LG LSIG Neutrals		
H	60-150	One #14 to 3/0 AL/CU
J	250	One 3/0 to 350 kcmil AL/CU
LG	400-600	Two 4/0 to 500 kcmil AL/CU

Breaker Positions

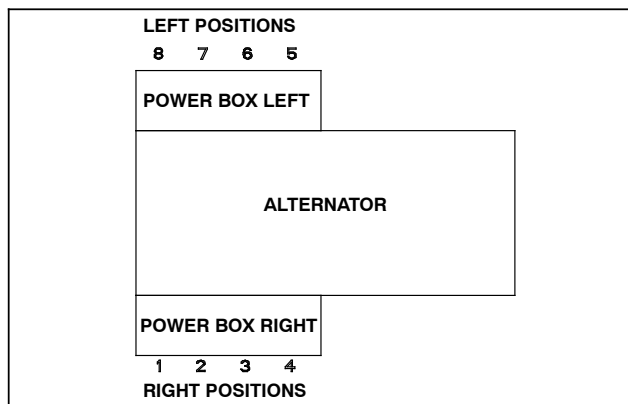

NOTE: Breaker and load bus phasing on right positions is A- B- C and on left positions is C- B- A.

NOTE: H, J, and LG-frames when selected with LSIG trip require two mounting spaces (one space for the breaker and one space for the LSIG neutral). These combinations are not reflected in the Multiple Circuit Breaker Combinations table on this page.

Multiple Circuit Breaker Combinations

Alternator Model	Positions			
	1 or 5	2 or 6	3 or 7	4 or 8
KH	H/J			
	H/J	H/J		
	H/J	H/J	H/J	
	H/J	H/J	H/J	H/J
	LG			
	LG	H/J		
	LG	LG		
	LG	H/J	H/J	
	LG	LG	H/J	
	LG	LG	LG	
	LG	H/J	H/J	H/J
	LG	LG	H/J	H/J
	LG	LG	LG	H/J
	LG	LG	LG	LG
	M/P *			
	M/P *		H/J	
	M/P *		LG	
	M/P *		M/P *	
	M/P *		H/J	H/J
	M/P *		LG	H/J
	M/P *		LG	LG
	R §			
	NW §			
	LOAD BUS KIT §			

* M and P breakers occupy two positions each.

§ R breakers, NW breakers, and the load bus kit occupy all four positions on a side.

Enclosed Circuit Breakers

The following loose circuit breakers are available in NEMA 1 or NEMA 3R enclosures for remote mounting.

80% Rating Circuit Breakers

Ampere Range	Trip Type	C. B. Frame Size
15- 150	Thermal Magnetic	HD
60- 150	Electronic LI	HD
	Electronic LSI	
175- 250	Thermal Magnetic	JD
250	Electronic LI	
	Electronic LSI	
60- 150	Electronic LI	HG
	Electronic LSI	
250	Electronic LI	JG
	Electronic LSI	
30	9- 325 A. Mag. Trip	HJ
50	84- 546 A. Mag. Trip	
100	180- 1040 A. Mag. Trip	
150	348- 1690 A. Mag. Trip	
250	684- 2500 A. Mag. Trip	JJ
300- 400	Thermal Magnetic	LA
400	500- 1000 A. Mag. Trip	
	750- 1600 A. Mag. Trip	
	1000- 2000 A. Mag. Trip	
	1125- 2250 A. Mag. Trip	
	1250- 2500 A. Mag. Trip	
	1500- 3000 A. Mag. Trip	
	1750- 3500 A. Mag. Trip	
	2000- 4000 A. Mag. Trip	
400- 600	Electronic LI	LG
	Electronic LSI	
800	Electronic LI	MG
1000- 1200	Thermal Magnetic	PG
800- 1200	Electronic LSI	
1200	Thermal Magnetic	PJ
	Electronic LSI	

100% Rating Circuit Breakers

Ampere Range	Trip Type	C. B. Frame Size
15- 150	Thermal Magnetic	HD
60- 150	Electronic LI	
	Electronic LSI	
175- 250	Thermal Magnetic	JD
250	Electronic LI	
	Electronic LSI	
60- 150	Electronic LI	HG
	Electronic LSI	
250	Electronic LI	JG
	Electronic LSI	
400	Electronic LI	LG
	Electronic LSI	
600- 800	Electronic LSI	PG
	Electronic LSI G	

Circuit Breaker Lugs Per Phase (Al/Cu)

Frame Size	Ampere Range	Wire Range
H	15- 150	One #14 to 3/0
J	175	One #4 to 4/0
	200- 250	One 3/0 to 350 kcmil
LA	300	One #1 to 600 kcmil
		Two #1 to 250 kcmil
LG	250	One #2 to 500 kcmil
	400- 600	Two 2/0 to 500 kcmil
M	800	Three 3/0 to 500 kcmil
P	250-800	Three 3/0 to 500 kcmil
	1000-1200	Four 3/0 to 500 kcmil

Accessories

Accessory	Breaker Frame
Auxiliary Contacts	H, J, LA, LG, M, P
Shunt Trip 12VDC	H, J, LA, LG, M, P
Shunt Trip 24VDC	H, J, LA, LG, M, P
Undervoltage Trip 12VDC	H, J, LA, LG, M, P
Undervoltage Trip 24VDC	H, J, LA, LG, M, P
Alarm Switch	H, J, LA, LG, M, P
Overcurrent Switch	H, J, LA, LG, M, P
Note: LA frame accepts a maximum combination of (2) internal accessories (not including padlock attachment)	

Enclosed Circuit Breakers

Enclosure Specifications

Frame Size	Dimensions, L x W x H, mm (in.)	
	NEMA 1	NEMA 3R
H, J	365 x 156 x 797 (14.4 x 6.2 x 31.4)	374 x 156* x 820 (14.8 x 6.2* x 32.3)
LA	388 x 165* x 1130 (15.3 x 6.5* x 44.5)	391 x 200* x 1118 (15.4 X 7.9* X 44.0)
LG †	519 x 293 x 1515 (20.4 x 11.5 x 59.6)	519 x 293 x 1515 (20.4 x 11.5 x 59.6)
M, P	533 x 248 x 1324 (21.0 x 9.58 x 52.1)	533 x 309 x 1324 (21.0 x 12.2 x 52.1)

* Width does not include circuit breaker operating handle.
† Enclosures accept 80% rated L- frame circuit breakers 600A max OR 100% rated L-frame circuit breakers 400A max.

Solid Neutral Assemblies and Ground Kits

Frame Size	Neutral or Ground	Maximum Ampere Rating	Terminals	Conductors per Terminal	Wire Size	Type
H, J	Neutral	100	2	1	#14 to 1/0	CU
					#12 to 1/0	AL
	Neutral	250	2	1 or 2	#1 to 600 #1 to 250	AL or CU
			2	1	#4 to 300	AL or CU
LA	Ground	250	2	1	#6 to 300	AL or CU
	Neutral	400	2	1 or 2	#1 to 600	AL or CU
			2	1 or 2	#1 to 250	AL or CU
	Ground	—	2	1	#10 to 2/0	CU
LG			2	1	#6 to 2/0	AL
	Neutral	200- 1000	2	3	3/0 to 500	AL or CU
	Ground	—	4	1	#6 to 250	AL or CU
M, P	Neutral	1200	8 (4 in, 4 out)	1	3/0 to 500	AL or CU
				2	#6 to 350	AL or CU
	Ground	—	4	1	#6 to 300	AL or CU



KOHLER CO., Kohler, Wisconsin 53044 USA
Phone 920-457-4441, Fax 920-459-1646
For the nearest sales and service outlet in the
US and Canada, phone 1-800-544-2444
KOHLERPower.com

Enclosed Circuit Breakers and Fused Disconnect Switches

The following loose circuit breakers and fused disconnect switches are available in NEMA 1 enclosures for remote mounting.

100% Rating 3P Circuit Breakers, 2500-3250 kW

Amps	Trip Type	Volts	Hz	kW	Approvals
3000	Electronic LI	600	60	2500	UL891
4000		780	60	2500	UL891
4000		600	60	2800/ 3000/ 3250	UL891
5000		380	50	2500/ 2800/ 3250	IEC
5000		480	60	2800/ 3000/ 3250	IEC
3000	Electronic LSIG	600	60	2500	UL891
4000		480	60	2500	UL891
4000		600	60	2800/ 3000/ 3250	UL891
5000		380	50	2500/ 2800/ 3250	IEC
5000		480	60	2800/ 3000/ 3250	IEC

NEMA 1 Enclosure Specifications, Breakers

Size	Dimensions, L x W x H, mm (in.)	
	mm	in.
3000 A	914.4 x 914.4 x 2324	36 x 36 x 91.5
4000 A	1219 x 1067 x 2324	48 x 42 x 91.5
5000 A	1219 x 1219 x 2324	48 x 48 x 91.5

Fused Disconnect Switches 50/60 Hz, HVL-CC Switch, UL and IEC

Amps	Trip Type	Poles	Accessories
200 400 600	Fuse	3P	None
			3 Auxiliary Contacts
			3 Auxiliary Contacts and Blown Fuse Indicator
			3 Auxiliary Contacts, Blown Fuse Indicator, and Protective Relay

NEMA 1 Enclosure Specifications, Fused Disconnect Switches

Size	Dimensions, L x W x H, mm (in.)	
	mm	in.
13.8 kV	946 x 749 x 2591 *	37.25 x 29.5 x 102
4160 V	946 x 883 x 2591 *	37.25 x 34.75 x 102


* Height includes pull box.

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler® generator set distributor for availability.

DISTRIBUTED BY:

© 2007 Kohler Co. All rights reserved.

CURRENT IN MULTIPLES OF I_r (I_r = LONG-TIME SETTING $\times I_n$)

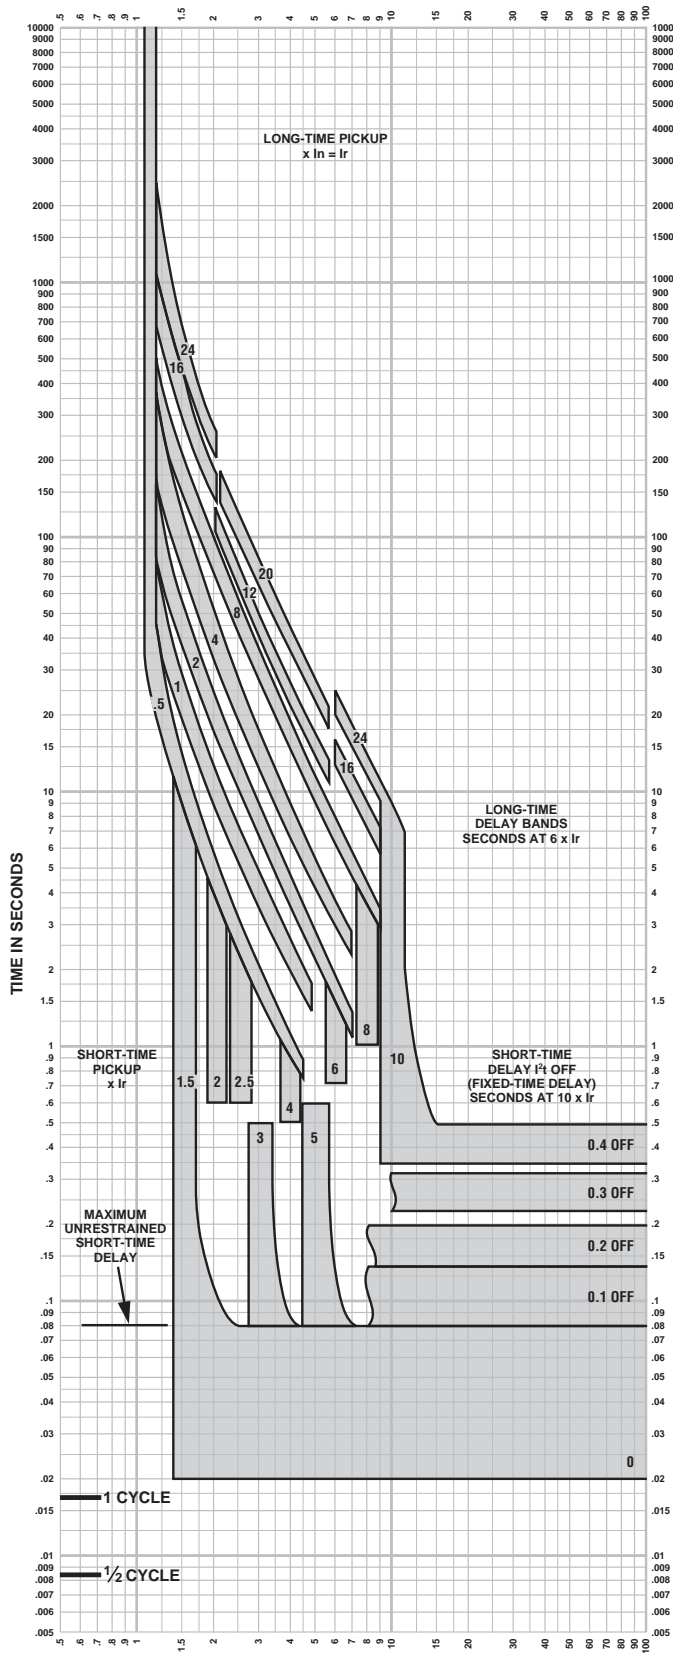

MICROLOGIC® 5.0/6.0 A/P/H TRIP UNIT **CHARACTERISTIC TRIP CURVE NO. 613-4**

Long-time Pickup and Delay
Short-time Pickup and I^2t OFF Delay

The time-current curve information is to be used for application and coordination purposes only.

Curves apply from -30°C to +60°C ambient temperature.

Notes:

1. There is a thermal-imaging effect that can act to shorten the long-time delay. The thermal-imaging effect comes into play if a current above the long-time delay pickup value exists for a time and then is cleared by the tripping of a downstream device or the circuit breaker itself. A subsequent overload will cause the circuit breaker to trip in a shorter time than normal. The amount of time delay reduction is inverse to the amount of time that has elapsed since the previous overload. Approximately 20 minutes is required between overloads to completely reset thermal-imaging.
2. The end of the curve is determined by the interrupting rating of the circuit breaker.
3. With zone-selective interlocking on, short-time delay utilized and no restraining signal, the maximum unrestrained short-time delay time band applies regardless of the setting.
4. Total clearing times shown include the response times of the trip unit, the circuit breaker opening, and the extinction of the current.
5. For a withstand circuit breaker, instantaneous can be turned OFF. See 613-7 for instantaneous trip curve. See 613-10 for instantaneous override values.
6. Overload indicator illuminates at 100%.

Merlin Gerin
Modicon
Square D
Telemecanique
Federal Pioneer
Federal Pacific
Schneider Electric Brands

Schneider
Electric

© 2000 Schneider Electric. all rights reserved

Curve No. 0613TC0004
December 2000
Drawing No. B48095-613-04

POWERPACT® P- and R-Frame Molded Case Circuit Breakers (Standard or 100% rated up to 2500 A)

The most compact and innovative molded case circuit breakers



P-Frame 1200 A



R-Frame

POWERPACT Molded Case Circuit Breakers lead the industry with proven, reliable protection and innovative design. Providing unparalleled performance and control, this generation of P- and R-frame circuit breakers features exclusive MICROLOGIC® Trip Units, which allow for a range of sophisticated applications for metering and monitoring. In addition, units can be interchanged to allow for maximum flexibility and are field-installable for easy upgrades as needed.

The compact P- and R-frame circuit breakers permit smaller footprint and higher density installations using I-LINE® Panelboards and Switchboards. These circuit breakers are available in 100% rated construction up to 2500 A to meet a broad range of commercial and industrial application needs.

Full-Featured Performance

- P-frame – 1200 A available in both standard and 100% ratings with sensor sizes 250–1200 A. Interrupting ratings (AIR) G-35kAIR, J-65kAIR and L-100kAIR at 480 VAC
- R-frame – 2500 A available in both standard and 100% ratings with sensor sizes 600–2500 A. Interrupting ratings (AIR) G-35kAIR, J-65kAIR and L-100kAIR at 480 VAC
- Compact breaker size allows for smaller footprint installations using I-LINE Panelboards and Switchboards. 9" width on P-frame designs and 15" width on R-frame designs provide increased density installations
- Most field-installable accessories are common to all frame sizes for easier stocking and installation
- Selection of four interchangeable MICROLOGIC Trip Units with POWERLOGIC® power metering and monitoring capabilities available in advanced trip units
- Compatible with POWERLOGIC® systems and high amperage power circuit breakers
- Built-in MODBUS® protocol provides an open communications platform and eliminates the need to purchase additional, proprietary network solutions
- Connection options include bus, cable or I-Line for installation flexibility
- Additional options are available for 5-cycle closing, stored energy mechanisms and draw-out mounting of 1200 A breakers

POWERPACT® P- and R-Frame Molded Case Circuit Breakers (Standard or 100% rated up to 2500 A)

Onboard Intelligence

For “smarter breakers,” a range of MICROLOGIC® Trip Units provides advanced functionality, such as a communications interface, and power metering and monitoring capabilities. With the appropriate MICROLOGIC Trip Unit, you can communicate with breakers, gather power information, monitor events and remotely control breakers based on predetermined conditions, leading to substantial savings in electrical system operating costs.

These interchangeable, microprocessor-controlled, plug-in devices provide the next generation of protection, measurement and control functions, delivering not only greater electrical system safety but also improved system integration and coordination.



MICROLOGIC® Trip Units

Choose the Model that Meets Your Needs

MICROLOGIC 3.0 and 5.0

- Basic circuit protection including long-time, instantaneous and optional short-time adjustments

MICROLOGIC 3.0A, 5.0A and 6.0A

- Long-time, instantaneous and optional short-time adjustments
- Integrated ammeter and phase loading bar graph
- LED trip indicator
- Zone selective interlocking with downstream and upstream breakers
- Optional ground-fault protection
- Optional MODBUS® communications interface

MICROLOGIC 5.0P and 6.0P

- Long-time, instantaneous and optional short-time adjustments
- Advanced relay protection (current imbalance, under/over voltage, etc.)
- Inverse Definite Minimum Time Lag (IdmtL) long-time delay curve shaping for improved coordination
- Basic power metering and monitoring functions
- Standard MODBUS communications interface compatibility with POWERLOGIC® installations
- Standard GF alarm on 5.0P. 6.0P has equipment ground-fault tripping protection

MICROLOGIC 5.0H and 6.0H


- All 5.0P and 6.0P functions
- Enhanced POWERLOGIC power metering and monitoring capabilities
- Basic power quality (harmonic) measurement
- Waveform capture

Contact your Square D sales representative for additional information. Or, visit www.SquareD.com.





Typical Overall Dimensions

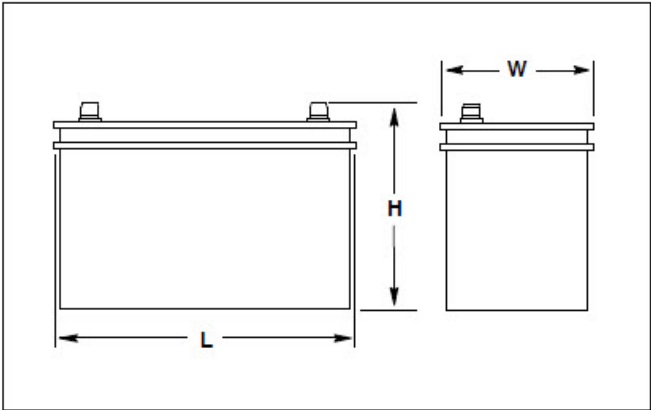

Standard Features

- Kohler Co. selects batteries to meet the engine manufacturer's specifications and to comply with NFPA requirements for engine-cranking cycles.
- Heavy-duty starting batteries are the most cost-effective means of engine cranking and provide excellent reliability in generator set applications.
- Tough polypropylene cases protect against life-shortening vibration and impact damage.
- Batteries are rated according to SAE standard J-537.
- All batteries are 12-volts. Kits that contain two or four batteries are available for 24-volt systems and/or systems with redundant starters.
- Wet- and dry-charged batteries have lead-calcium or lead-antimony plates and use sulfuric acid electrolyte. Removable cell covers allow checking of electrolyte specific gravity.
- Absorbant glass mat (AGM) batteries are sealed and maintenance free.
- Batteries are for applications below and above 0 ° C (32 ° F).

Charge Type*	Battery Part Number	Battery Qty. per Size	BCI Group Size	Battery SAE Dimension, mm (in.)			Cold Cranking Amps at 18°C (0°F) Min.	Reserve Capacity Minutes at 27° (80°F) Min.	Battery Post Layout and Style
				L	W	H			
Wet	324586	2	31	330.2 (13.0)	173.0 (6.8)	239.8 (9.4)	950	185	C/3

Battery Specifications

Battery Post Layouts (A/C/D) and Styles (1/3)

A


C

D

1

3

Notes: Dimensions are in mm; 25.4 mm equals 1 inch. BCI group numbers shown in italics.
Order stud kit 254427 to convert from Style 3 to Style 1.
Battery post layout letters and style numbers match drawing 244578 format.

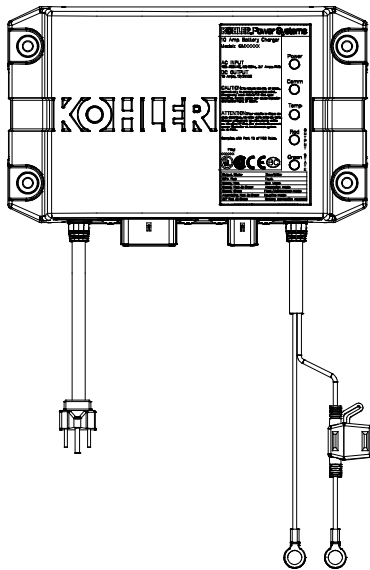

The battery charger is a fully-automatic, high efficiency battery charger that charges batteries rapidly and safely. The battery charger is designed for an industrial environment.

The battery charger is designed for operation with an engine cranking battery.

The battery charger is universal voltage input capable, comes with a standard 120 V/60 Hz AC plug, and charges 12 VDC or 24 VDC battery systems.


Five LED lights indicate power, communication status, temperature compensation status, charge curve, and charger status.

With the optional battery temperature sensor connected, the battery charger can adjust output voltages for optimal charging.

Standard Features

- 12 or 24 VDC output
 - Automatic voltage detection
- Automatic multi-stage charging modes
 - Recovery charge
 - Bulk charge
 - Absorption charge
 - Float charge
 - Equalize charge
- Charges the following type batteries:
 - Flooded lead acid (FLA)
 - AGM
 - Gel cell
 - High performance AGM
 - Nickel-cadmium (NiCad)
- 5 LED status indicators
- Durable potted assembly for waterproofing and vibration resistance
- Reverse-polarity protection
- Short-circuit protection
- Electronically limited output current
- Optional temperature compensation (FLA only)
- User adjustable parameters to support optimal manufacturer recommended charge curve.
- Code compliance:
 - UL 1236 Listed
 - NFPA 110, Level 1 compatible (when used with Kohler controller and connected to engine harness)
 - CSA - C22.2 No. 107.2-01
 - FCC - Title 47, Part 15 Class A
 - CE
 - IBC 2015
 - OSHPD

DC Output		AC Input		Overall Dimensions W x D x H	Shipping Weight	
Volts (Nominal)	Amps	Volts (Nominal)	Amps		kgs	lbs
12/24	10	100-260	3.7	253 mm x 152 mm x 74 mm (10.0 in x 6.0 in x 2.9 in)	3.6	7.9

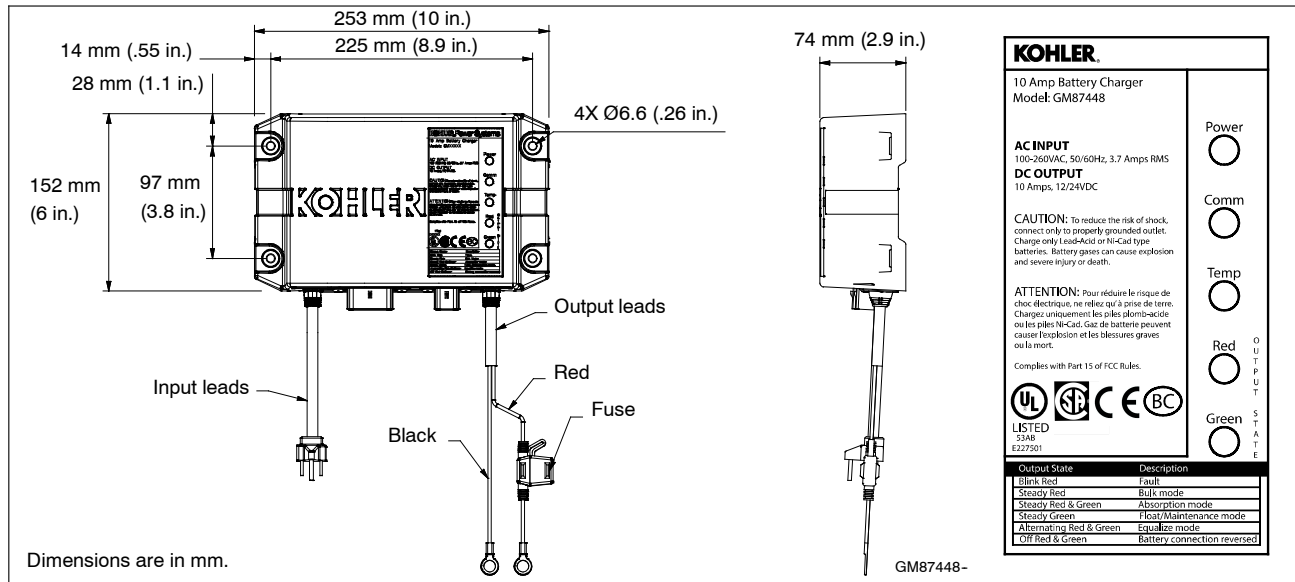

Specifications



AC Input	100-260 VAC
Frequency Input	50/60 Hz
DC Output	10 Amps @ 12 VDC or 10 Amps @ 24 VDC (On battery voltage regulation $\pm 1\%$; current is electronically limited)
Fuse Protection	15 amps ATC
Battery Types	Flooded Lead Acid (FLA) AGM Gel Cell High Performance AGM Nickel-Cadmium (NiCad)
Monitoring LED Indications	Power Communication Temperature compensation Output charger curve and charger status: <ul style="list-style-type: none"> Red Green
Environmental	
Operating	-20° to 70°C (-4° to 158° F)
Storage	-40° to 85°C (-40° to 185° F)
Relative Humidity	5 to 95% (non-condensing)
Salt Spray Testing	ASTM B117
Corrosion Resistant	From battery gases

Enclosure	
Environmental Resistant	From rain, snow, dust, and dripping water
Battery Connections	
Lead Length	1.8 m (6 ft.) red and black leads
Battery Connections	9.5 mm (3/8 in.) ring terminals
AC Power Connections	
Lead Length	1.8 m (6 ft.)
Storage	Standard US style 3-prong AC plug
Available Options	
Temperature compensation	

DISTRIBUTED BY:

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler® generator distributor for availability.

© 2017, 2019 by Kohler Co. All rights reserved.

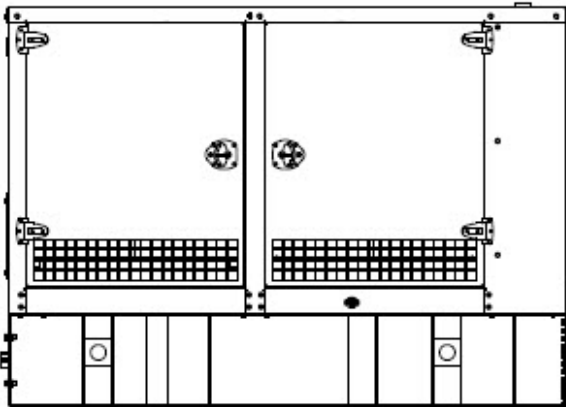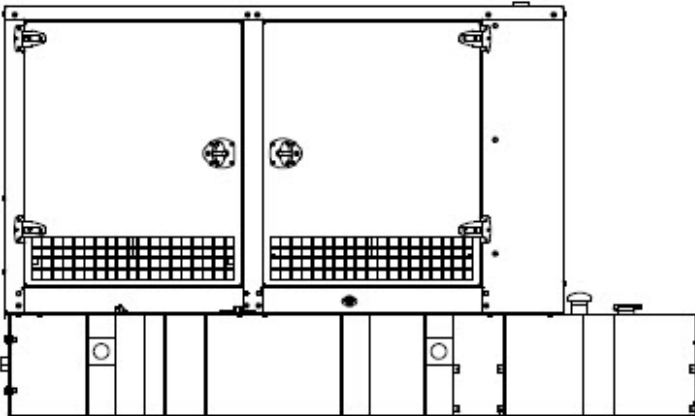
**Enclosure with Standard Subbase Fuel Tank****Enclosure with State Code Subbase Fuel Tank**

Sound Enclosure Standard Features

- Internal-mounted critical silencer and flexible exhaust connector.
- Lift base-mounted or tank mounted steel construction with hinged doors.
- Fade-, scratch-, and corrosion-resistant Kohler® Power Armor automotive-grade textured finish.
- Power Armor surpasses 3,000-hour salt spray corrosion tests per ASTM B- 1117
- Enclosure has four access doors which allow for easy maintenance.
- Lockable, flush-mounted door latches.
- Vertical air inlet and outlet discharge to redirect air and reduce noise.
- Acoustic insulation that meets UL 94 HF1 flammability classification and repels moisture adsorption.
- Sound-attenuated that uses up to 51 mm (2 in.) of acoustic insulation.
- Steel sound enclosure is designed to 150 mph (241 kph) wind load rating.


Subbase Fuel Tank Features

- The fuel tank has a Power Armor Plus textured epoxy-based rubberized coating.
- The above-ground rectangular secondary containment tank mounts directly to the generator set, below the generator set skid (subbase).
- Both the inner and outer tanks have emergency relief vents.
- Flexible fuel lines are provided with subbase fuel tank selection.
- The secondary containment generator set base tank meets UL 142 tank requirements. The inner (primary) tank is sealed inside the outer (secondary) tank. The outer tank contains the fuel if the inner tank leaks or ruptures.

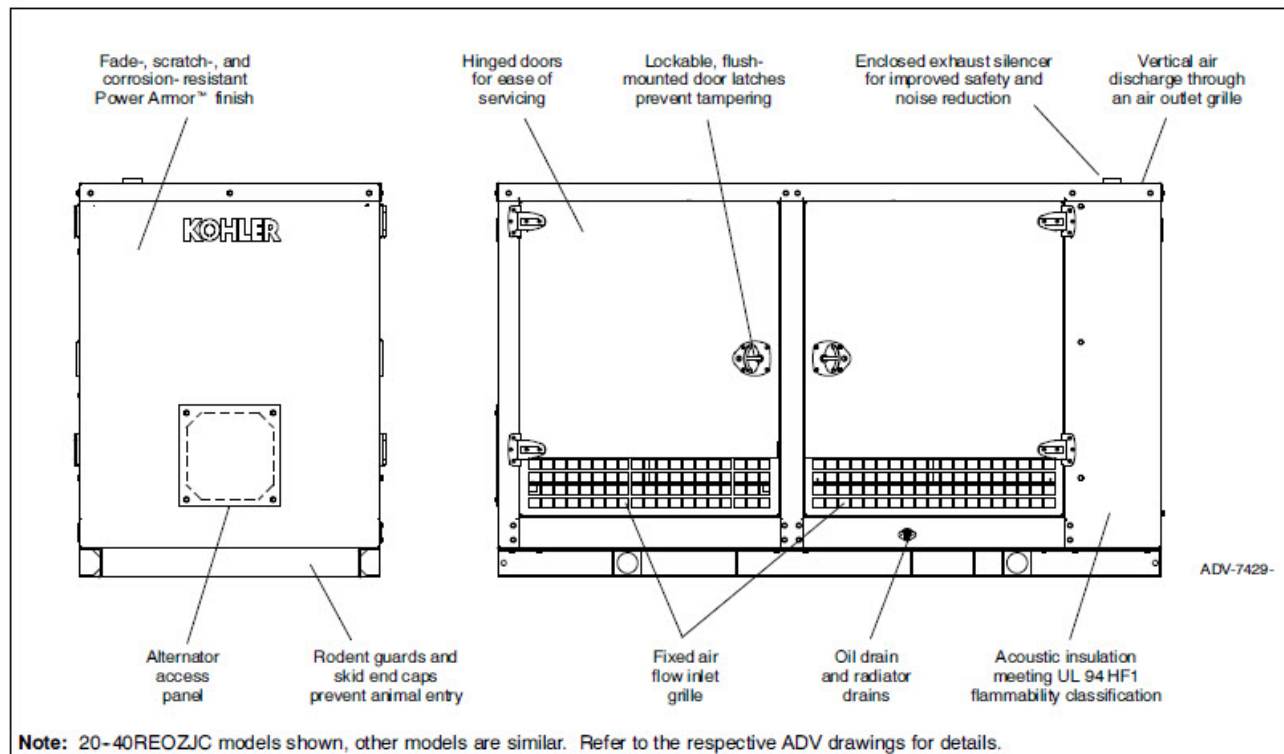

Sound Enclosure Features

- Available in steel (14 gauge) formed panel, solid construction. Preassembled package offering corrosion resistant, dent resilient structure mounting directly to lift base or fuel tank.
- Power Armor automotive-grade finish resulting in advanced corrosion and abrasion protection as well as enhanced edge coverage and color retention.
- Internal exhaust silencer offering maximum component life and operator safety.
- Interchangeable modular panel construction. Allows complete serviceability or replacement without compromising enclosure design.
- Cooling/combustion air intake with a horizontal air inlet. Sized for maximum cooling airflow.
- Service access. Multi-personnel doors for easy access to generator set control and servicing of the fuel fill, fuel gauge, oil fill and battery.
- Cooling air discharge. Weather protective design featuring vertical air discharge. Redirects cooling air up and above the enclosure to reduce ambient noise.
- Attenuated design. Acoustic insulation UL 94 HF1 listed for flame resistance offering up to 51 mm (2 in.) mechanically restrained acoustic insulation.
- Note: Installing an additional length of exhaust tail pipe may increase backpressure levels. Please refer to the generator set spec sheet for the maximum backpressure value.

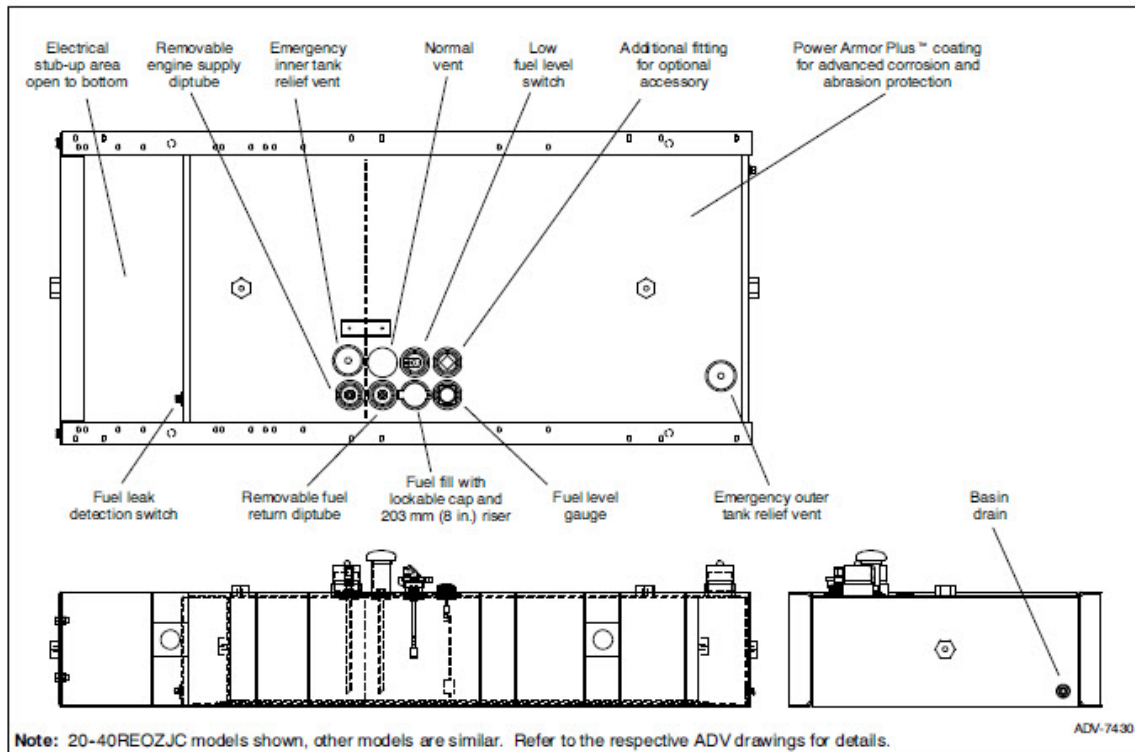

- Extended operation. Usable tank capacity offers full load standby operation of up to 72 hours.
- Power Armor Plus textured epoxy-based rubberized coating that creates an ultra-thick barrier between the tank and harsh environmental conditions like humidity, saltwater, and extreme temperatures, and provides advanced corrosion and abrasion protection.
- UL listed. Secondary containment generator set base tank meeting UL 142 tank requirements.
- NFPA compliant. Designed to comply with the installation standards of NFPA 30 and NFPA 37.
- Integral external lift lugs. Enables crane with spreader-bar lifting of the complete package (empty tank, mounted generator set, and enclosure) to ensure safety.
- Emergency pressure relief vents. Vents ensure adequate venting of inner and outer tank under extreme pressure and/or emergency conditions.
- Normal vent cap. Vent is raised above lockable fuel fill.
- Low fuel level switch. Annunciates a 50% low fuel level condition at generator set control.
- Leak detection switch. Annunciates a contained primary tank fuel leak condition at generator set control.
- Electrical stub-up.


Fuel Tank Capacity, L (gal.)	Est. Fuel Supply Hours at 60 Hz with Full Load	Max. Length, mm (in.)	Enclosure and Fuel Tank Length, mm (in.)	Enclosure and Fuel Tank Width, mm (in.)	Enclosure and Fuel Tank Weight, kg (lb.)	Enclosure and Fuel Tank Height, mm (in.)	Fuel Tank Height (H), mm (in.)	Sound Pressure Level, dB(A)
Lift base	0	1338 (52.7)	4121 (162.3)	1338 (52.7)	2699 (5950)	2153 (84.8)	260 (10)	75
1787 (472)	24/26	4121 (162.3)	1338 (52.7)	3606 (7950)	2655 (104.5)	762 (30)		75

Note: Data in table is for reference only, refer to the respective ADV drawings for details.


Note: Refer to TIB-114 for generator set sound data.

Max. weight includes the generator set (wet), enclosure, silencer, and tank (no fuel). The generator set weight represents using the largest alternator option. The enclosure weight is with acoustic insulation added.

Engine Block Heater Kits

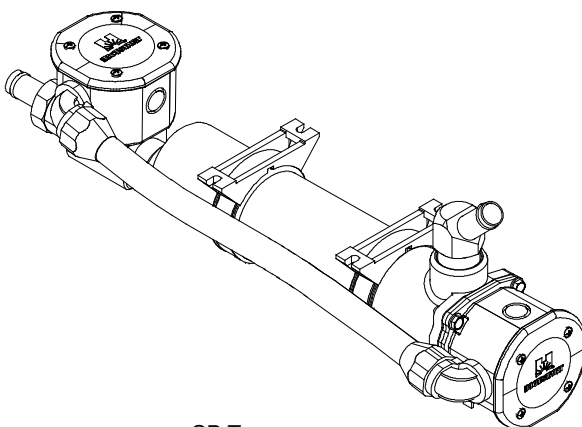

CB Type

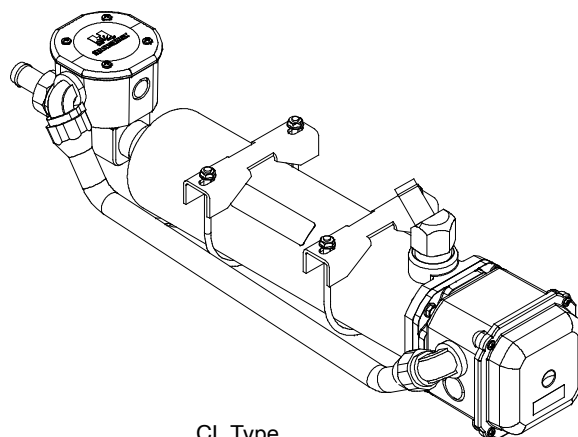

CL Type

Block Heater Kit, Typical

Applicable Models

- 180-200RZXB
- 180-200REZXB
- 230-275REOZJE
- 300-500REOZJ
- 350-500REOZJB
- 350-500REOZJC
- 350-400REOZJD
- 500REOZVC
- 550-600REOZVB

Standard Features

- UL-C/US listed
- CE compliant
- Controls for automatic operation
- Compact design
- Easy to install

Description

The engine block heater kit heats the engine coolant in cold ambient, warming the cylinders, oil, and charge air circuit which all help to give a faster starting time. The engine block heater uses thermosiphon action to circulate warm coolant into the engine and supplies constant heating to the engine. The engine block heater helps to extend element life and gives a significant reduction in electrical consumption.

The engine block heater has a fixed setting thermostat that turns ON when the engine coolant temperature reaches 27°C (80°F) and turns OFF when the engine coolant temperature reaches 38°C (100°F).

The engine block heater kit is recommended for ambient temperatures below 10°C (50°F).

The engine block heater kits are available in 120 V, 208 V, 240 V, and 480 V versions.


Block Heater Specifications

Heating Fluid	Water, Coolant Mix (50% Glycol/50% Water)
Thermostat Temperature Range	27° - 38° C (80° - 100° F)
Temperature High Limit	96° C (205° F)
Max. Pressure	125 psi (860 kPa)
Inlet/Outlet Plumbing	1 in. NPT
System Ingress	NEMA 4


Specifications

Block Heater Kit Number	Component	Watts	Voltage	Phase
GM75809- KA1	GM76113	2500	90- 120	1
GM75809- KA2	GM76114	2500	190- 208	1
GM75809- KA3	GM76115	2500	210- 240	1
GM75809- KA4	GM76116	2500	380- 480	1
GM76120- KA1	GM76113	2500	90- 120	1
GM76120- KA2	GM76114	2500	190- 208	1
GM76120- KA3	GM76115	2500	210- 240	1
GM76120- KA4	GM76116	2500	380- 480	1
GM79186- KA1	GM79182	4000	190- 208	1
GM79186- KA2	GM79183	4000	210- 240	1
GM79186- KA3	GM79184	4000	380- 480	1
GM79186- KP1	GM79182	4000	190- 208	1
GM79186- KP2	GM79183	4000	210- 240	1
GM79186- KP3	GM79184	4000	380- 480	1
GM79187- KA1	GM79182	4000	190- 208	1
GM79187- KA2	GM79183	4000	210- 240	1
GM79187- KA3	GM79184	4000	380- 480	1
GM79187- KP1	GM79182	4000	190- 208	1
GM79187- KP2	GM79183	4000	210- 240	1
GM79187- KP3	GM79184	4000	380- 480	1
GM84820- KA1	GM76113	2500	90- 120	1
GM84820- KA2	GM76114	2500	190- 208	1
GM84820- KA3	GM76115	2500	210- 240	1
GM84820- KA4	GM76116	2500	380- 480	1


Wiring Diagram

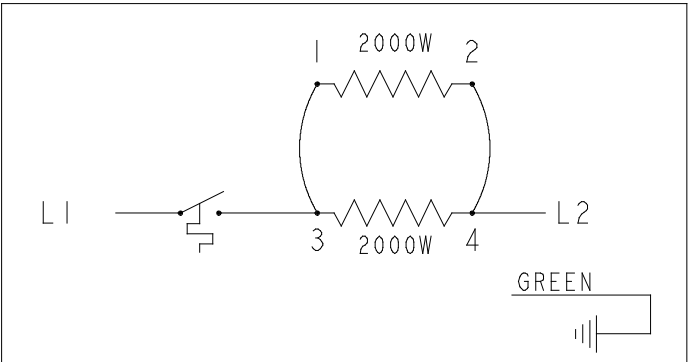

208 VAC single phase- parallel

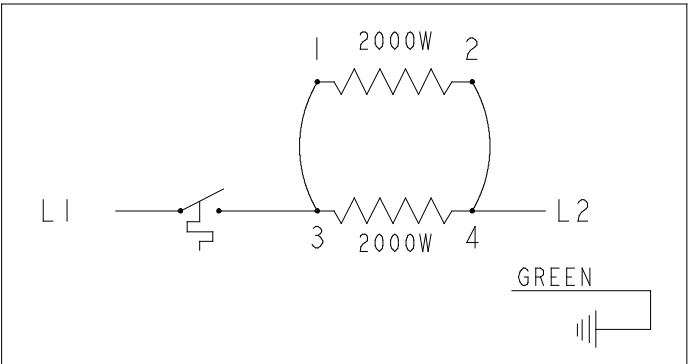

240 VAC single phase- parallel

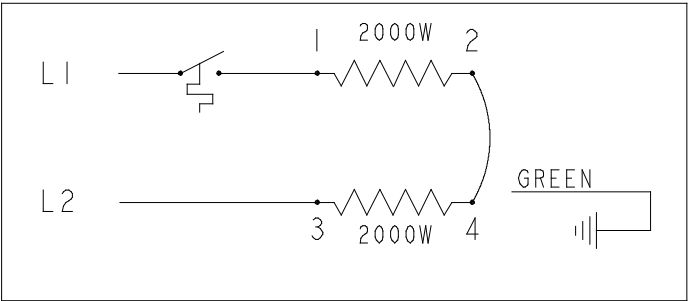


480 VAC single phase- parallel



KOHLER CO., Kohler, Wisconsin 53044 USA
Phone 920-457-4441, Fax 920-459-1646
For the nearest sales and service outlet in the
US and Canada, phone 1-800-544-2444
KOHLERPower.com

Dimensions and Weights

CB type block heater size, L x H x W, mm (in):	510 x 132 x 129 (20.1 x 5.2 x 5.1)
CL type block heater size, L x H x W, mm (in):	597 x 147 x 158 (23.5 x 5.8 x 6.2)
CB type block heater weight, kg (lb):	3 (6.9)
CL type block heater weight, kg (lb):	4.5 (10)

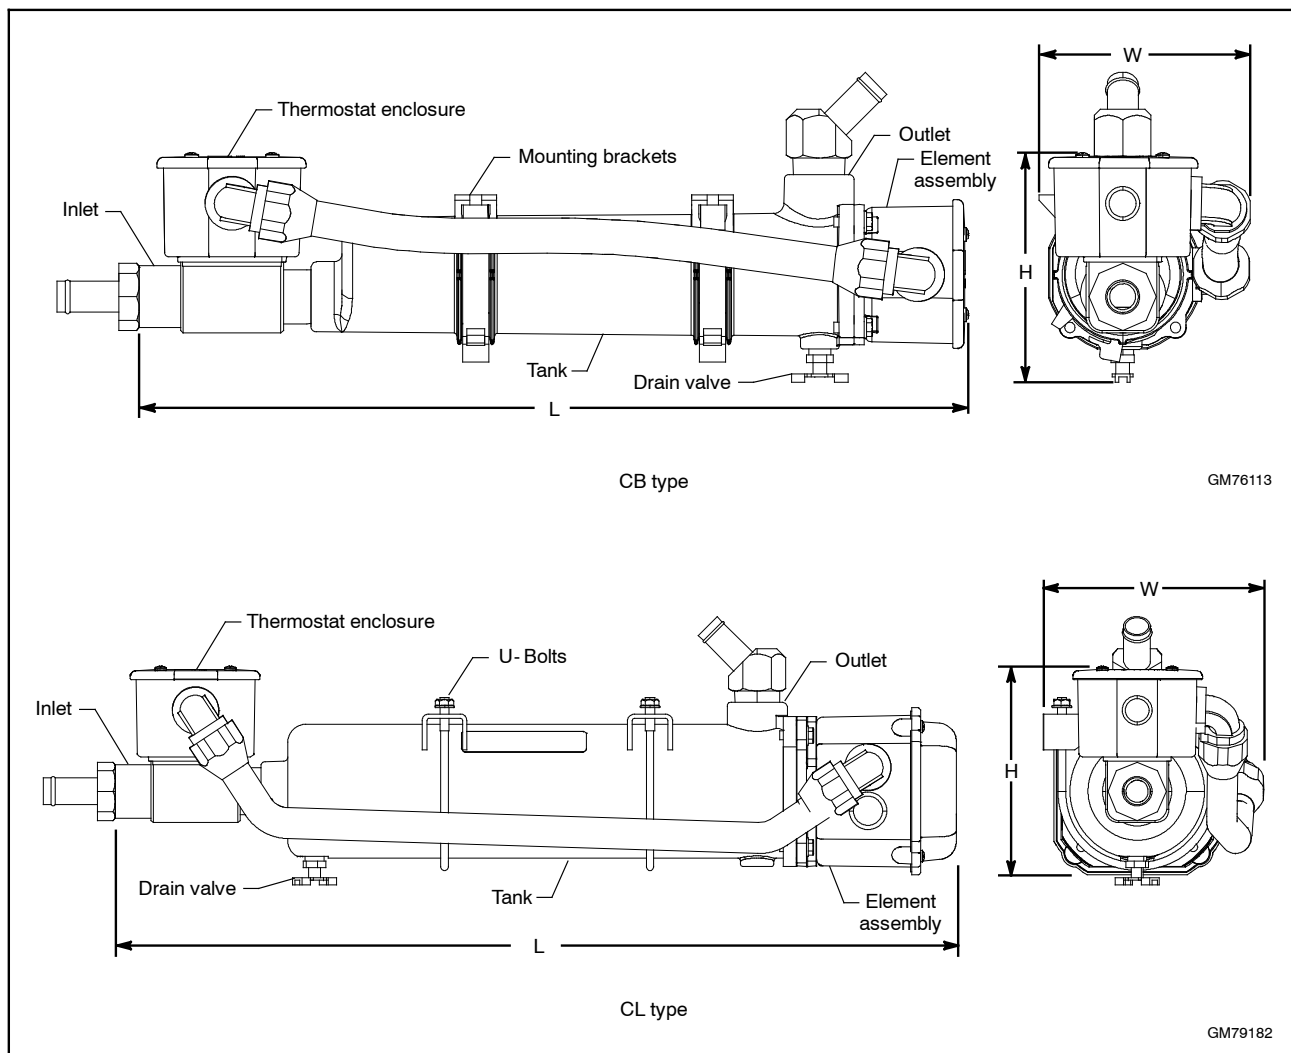


DISTRIBUTED BY:

Availability is subject to change without notice. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever. Contact your local Kohler® generator distributor for availability.

© 2020 Kohler Co. All rights reserved.



Integral Voltage Regulator with Kohler® APM402/ Decision-Maker® 3000 and Menu-Driven Selections (15-1000 kW Generator Set Models)

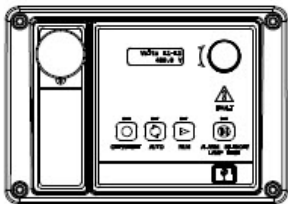

APM402 and Decision-Maker® 3000 Controller with Integral Voltage Regulator

The voltage regulator is integral to the controller and uses patented hybrid voltagae regulator design providing ±0.5% no-load to full-load regulation using root-mean-square (RMS) voltage sensing. The voltage regulator features three-phase sensing and is available for 12- or 24-volt engine electrical systems.

Voltage Regulators

The following information provides general features, specifications, and functions of available voltage regulators.

This information generally applies to a single generator set and multiple generator sets with paralleling applications. Refer to the respective generator set specification sheet and see your authorized distributor for information regarding specific voltage regulator applications and availability.

Integral Voltage Regulators with APM402/Decision-Maker® 3000 Controllers

Calibration	Digital Display	Range Settings	Default Selection
Voltage Adjustment	Volt Adj	± 10% of System Voltage	System Voltage
Underfrequency Unload or Frequency Setpoint	Frequency Setpoint	42 to 62 Hz	2.5 Hz Below Nominal Frequency
Underfrequency Unload Scope	Slope	0-10% of System Voltage (Volts per Cycle)	5% of System Voltage



Specification/Feature	Integral with APM402/Decision-Maker® 3000
Generator Set Availability	15-1000 kW
Type	Patented Hybrid Design
Status and Shutdown Indicators	LEDs and Text LCD Display
Operating Temperature	-40 ° C to 70 ° C (-40 ° F to 158 ° F)
Storage Temperature	-40 ° C to 85 ° C (-40 ° F to 185 ° F)
Humidity	5-95% Non-Condensing
Circuit Protection	Solid-State, Redundant Software and Fuses
Sensing, Nominal	100-240 Volts (L-L), 50-60 Hz
Sensing Mode	RMS, Single- or 3-Phase
Input Requirements	8-36 VDC
Continuous Output	5 VDC @ 100mA max. 5.0 ADC with GM88453 Activator Board
Maximum Output	5 VDC @ 100mA max. 5.0 ADC with GM88453 Activator Board
Transition Frequency	42.0-62.0Hz
Exciter Field Resistance	4-30 Ohms with GM88453 Activator Board
No-Load to Full-Load Voltage Regulation	± 0.5%
Thermal Drift	<0.5% (-40 ° C to 70 ° C) [-40 ° F to 158 ° F] Range
Response Time	Less than 5µS
System Voltage Adjust.	± 10%
Voltage Adjustment	Controller Menu Knob
Remote Voltage Adjustment	not available
Paralleling Capability	not available
VAR/PF Control Input	not available

Integral Voltage Regulator with APM402/Decision-Maker® 3000 Controller


- The APM402/Decision-Maker® 3000 digital display and pushbutton/rotary dial provide access to data. A two-line LCD display provides complete and concise information. A two-line vacuum fluorescent display provides complete and concise information.
- The Decision-Maker® 3000 graphical display and pushbutton/rotary dial provide access to data. A five-line, 35-characters per line LCD display provides complete and concise information include gain, ramp rate, reactive droop, VAR control (P, I, D gains) and PF control (P, I, D gains).
- The controllers provide ISO 8528-5, Class G3, compliance for transient response on some 20-300 kW generator set models. Both controllers support Modbus®.
- These controllers can control Fast Response™ II, Fast Response™ X, and wound field alternators using the GM88453 activator board.

Voltage Regulator Menu

- Voltage adjustment, ± 10% of system voltage
- V/Hz cut-in, 42-62 Hz
- Underfrequency unload slope, 0-10% of system voltage

Jumpers

- L1-L2 volts
- L2-L3 volts (3-phase)
- L3-L1 volts (3-phase)
- L1-N volts
- L2-N volts
- L3-N volts (3-phase)

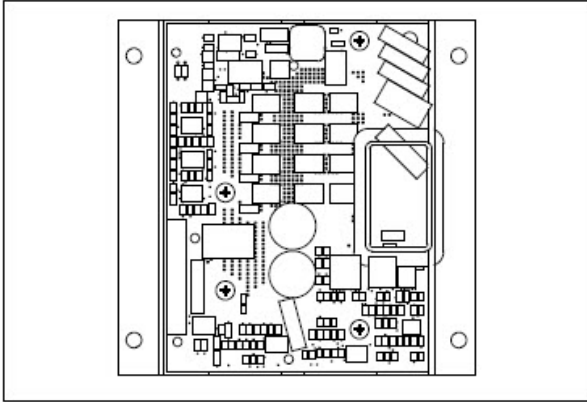

- Interfaces between the controller and alternator assembly using rotor field leads, auxiliary power windings, and optic board leads.
- Allows the Decision-Maker® controllers the ability to control a wound-field alternator using the same control signal as Fast Response™ alternator.
- Permits the generator set controller to control the current to the exciter field of a wound-field excited alternator.
- Contains two isolated relay driver outputs (RDO) rated at 250 mA. Provides RDO outputs indicating a field over-excitation condition and that the alternator is supplying voltage to the activator.

Modbus® is a registered trademark of Schneider Electric.



Alternator Data

TECHNICAL INFORMATION BULLETIN
Alternator Data Sheet
Alternator Model: 4UA10
Frequency: 60 Hz
Speed: 1800 RPM
Leads: 12 (6 Lead, 600 Volt)


Voltage L-N/L-L	Phase	Power Factor	Connection	kW* (kVA)						
				Class B	Class F				Class H	
				80°C Continuous	90°C Lloyds	95°C ABS	105°C Continuous	130°C Standby	125°C Continuous	150°C Standby
139/240 277/480	3	0.8	Wye	225.0 (281.3)	237.0 (296.3)	243.0 (303.8)	255.0 (318.8)	275.0 (343.8)	271.0 (338.8)	275.0 (343.8)
127/220 254/440	3	0.8	Wye	220.0 (275.0)	232.0 (290.0)	238.0 (297.5)	250.0 (312.5)	270.0 (337.5)	266.0 (332.5)	270.0 (337.5)
120/208 240/416	3	0.8	Wye	215.0 (268.8)	227.0 (283.8)	233.0 (291.3)	245.0 (306.3)	265.0 (331.3)	261.0 (326.3)	265.0 (331.3)
110/190 220/380	3	0.8	Wye	205.0 (256.3)	217.0 (271.3)	223.0 (278.8)	235.0 (293.8)	250.0 (312.5)	247.0 (308.8)	250.0 (312.5)
120/240	3	0.8	Delta	215.0 (268.8)	227.0 (283.8)	233.0 (291.3)	245.0 (306.3)	265.0 (331.3)	261.0 (326.3)	265.0 (331.3)
347/600	3	0.8	Wye	205.0 (256.3)	217.0 (271.3)	223.0 (278.8)	235.0 (293.8)	260.0 (325.0)	255.0 (318.8)	260.0 (325.0)

* All data tested in accordance with IEEE Standard 115. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.


Submittal Data: 139/240 Volts, 0.8 PF, 1800 RPM, 60 Hz, 3-Phase, 130°C Rise

	Symbol	Per Unit	Ohms		Symbol	Value
Typical Resistances				Typical Time Constants		
Phase Resistance		0.030	0.005	Armature Short Circuit	T _a	0.016 sec.
Rotor Resistance		11.202	1.877	Transient Short Circuit	T' _d	0.171 sec.
Typical Reactances				Transient Open Circuit	T' _{do}	1.988 sec.
Synchronous				Typical Field Current		
Direct	X _d	4.097	0.686	Full Load	I _{fFL}	35.76 amps
Quadrature	X _q	2.131	0.357	No Load	I _{fNL}	8.45 amps
Transient				Typical Short Circuit Ratio		
Unsaturated	X' _{du}	0.401	0.067			0.326
Saturated	X' _d	0.352	0.059	Harmonic Distortion		
Subtransient				RMS Total Harmonic Distortion		2.7%
Direct	X'' _d	0.160	0.027	Max. Single Harmonic		7 th
Quadrature	X'' _q	0.155	0.026	Deviation Factor (No Load, L-L)		4.3%
Negative Sequence	X ₂	0.158	0.026	Telephone Influence Factor		<50
Zero Sequence	X ₀	0.015	0.002	Insulation Material Class		
				per NEMA MG1-1.66		H
				Phase Rotation		
						ABC

**4UA10, 60 Hz, 139/240, 277/480 Volts, Wye
TYPICAL ALTERNATOR EFFICIENCY***

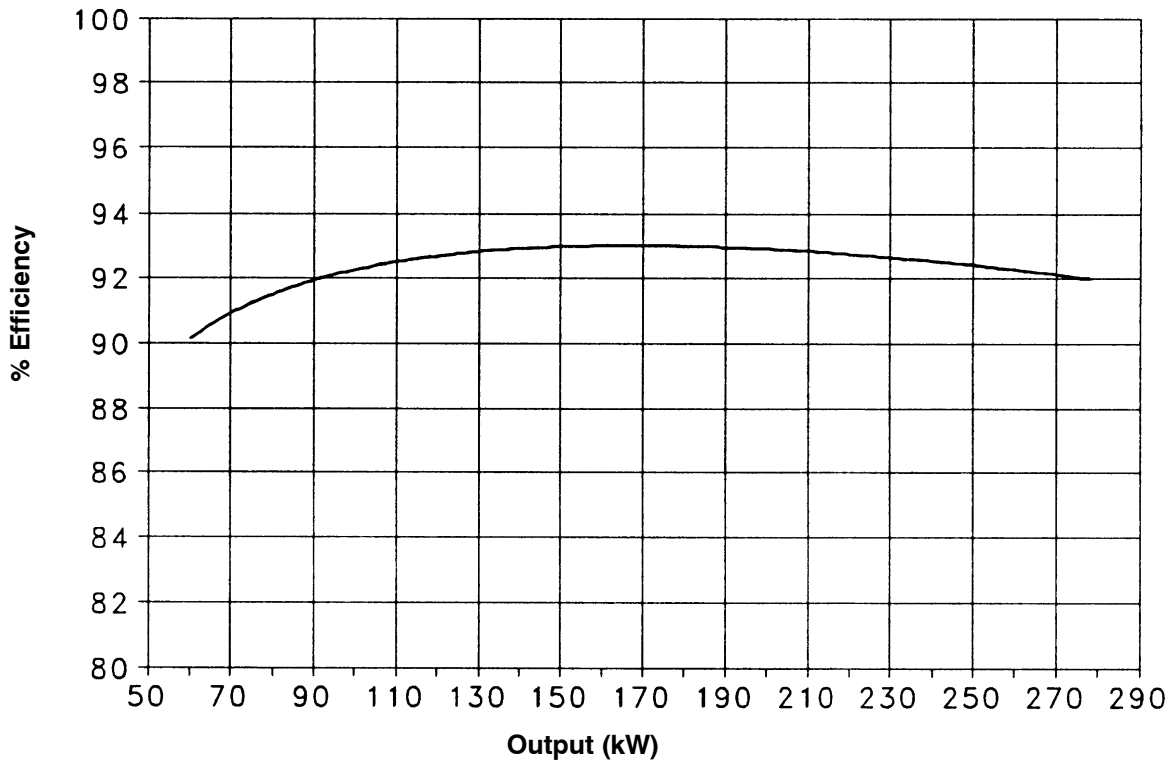


**TYPICAL MOTOR STARTING CHARACTERISTICS*
4UA10, 60 Hz, 139/240, 277/480 Volts, Wye**

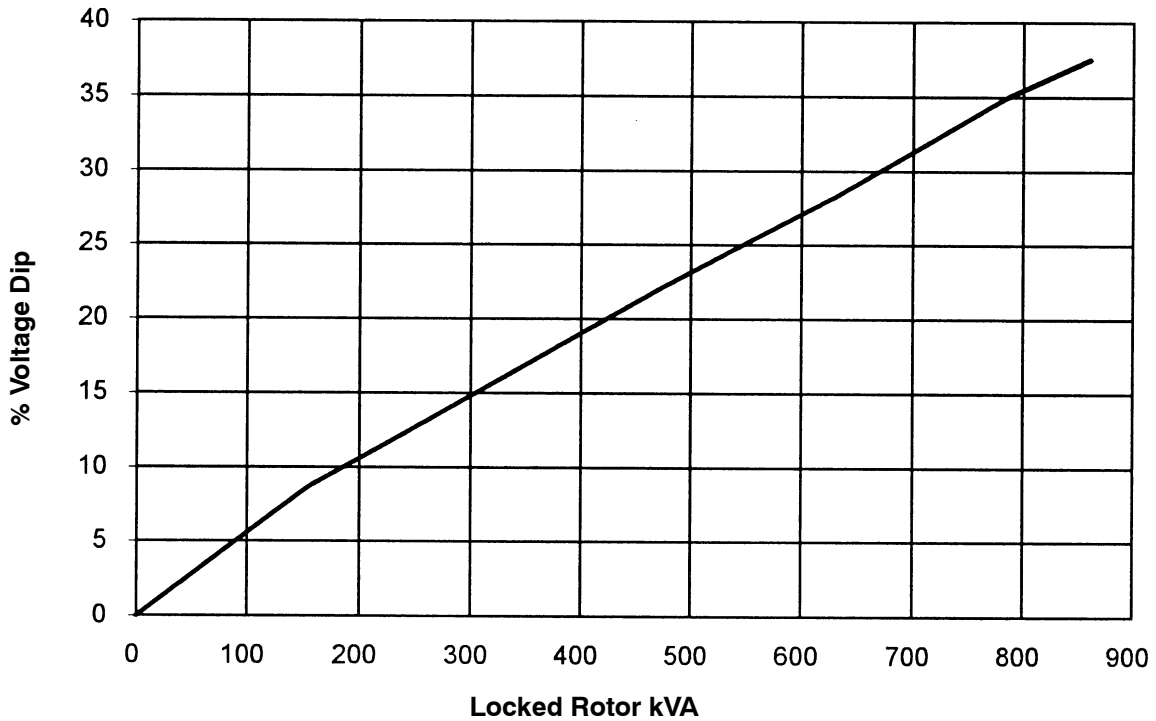

* All data tested in accordance with IEEE Standard 115. Kohler Co. reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.


4UA10, 60 Hz, Low Wye or Delta Connection SHORT CIRCUIT DECREMENT CURVE

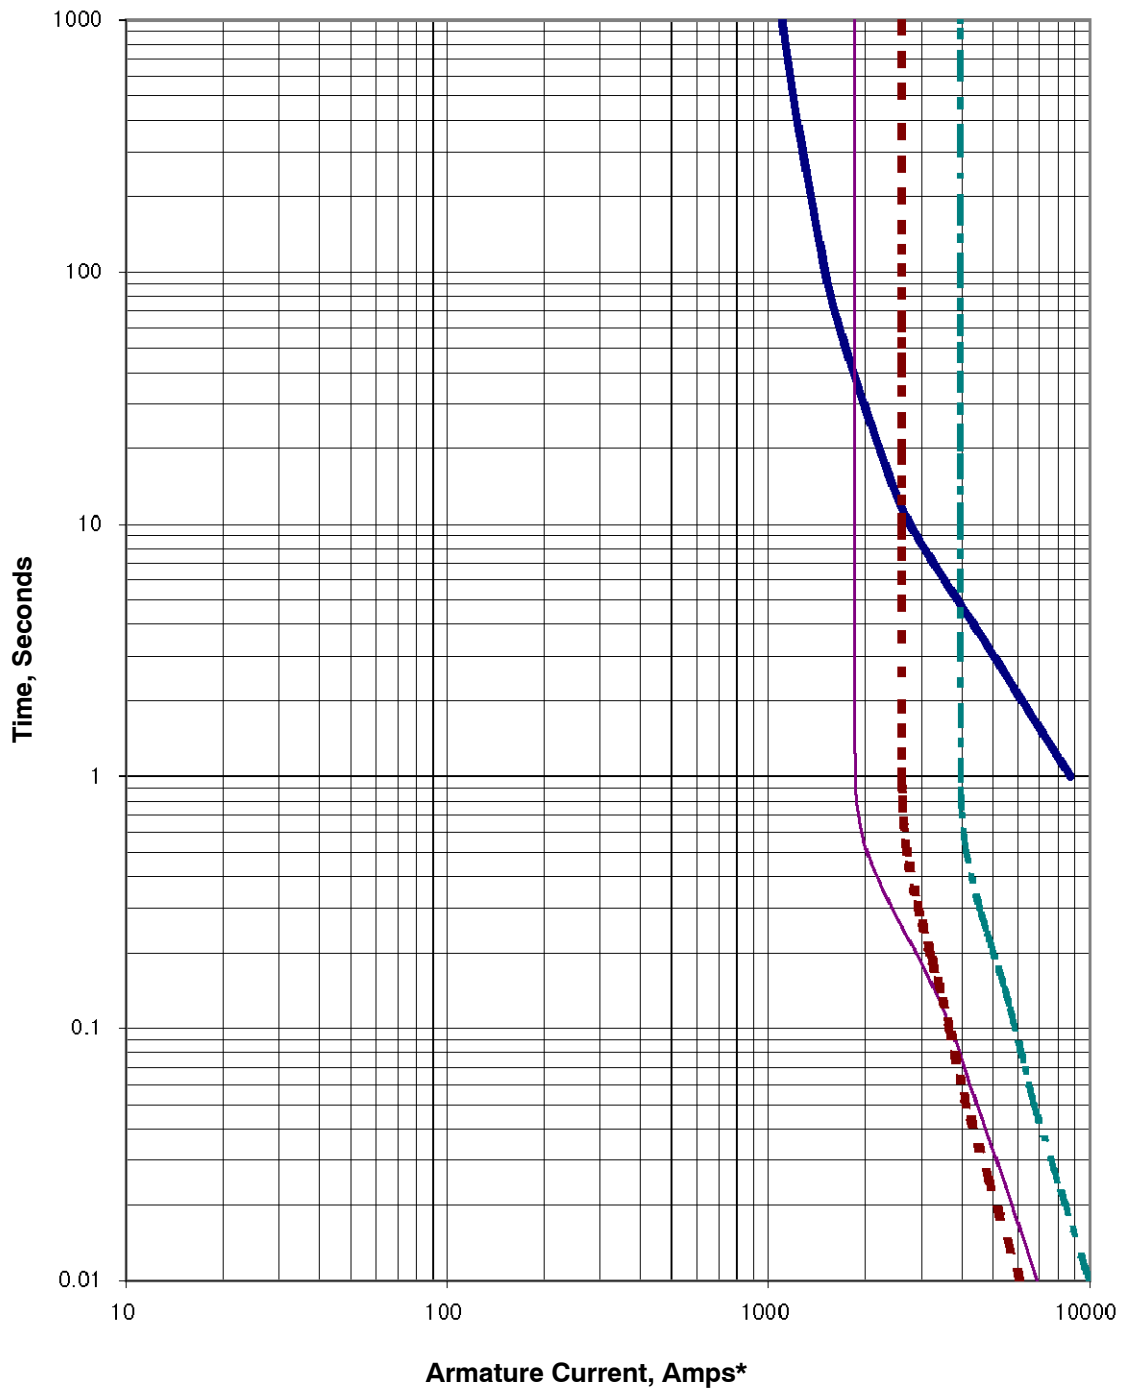

- Alternator Damage Curve
- 3 Phase Symmetrical
- Line-to-Line 1 Phase
- Line-to-Neutral 1 Phase

* Instantaneous current (t=0) is asymmetric. Divide by 1.732 for symmetric.


4UA10, 60 Hz, High Wye Connection SHORT CIRCUIT DECREMENT CURVE

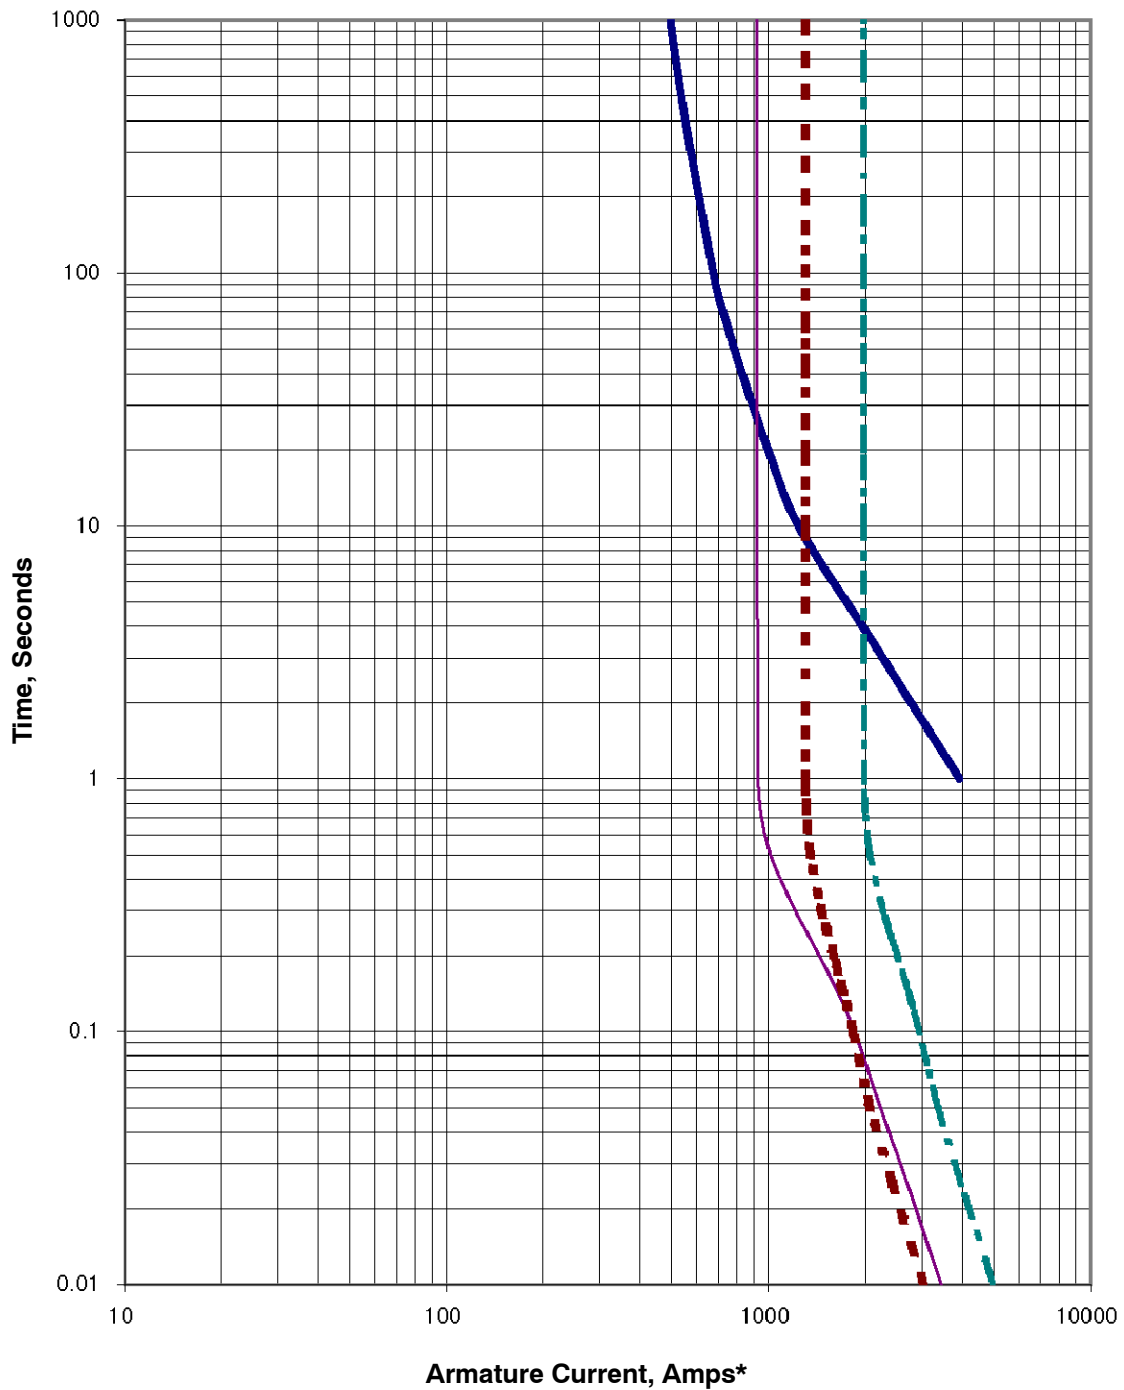

- Alternator Damage Curve
- 3 Phase Symmetrical
- Line-to-Line 1 Phase
- Line-to-Neutral 1 Phase

* Instantaneous current (t=0) is asymmetric. Divide by 1.732 for symmetric.

4UA10, 60 Hz, 600 V Connection SHORT CIRCUIT DECREMENT CURVE

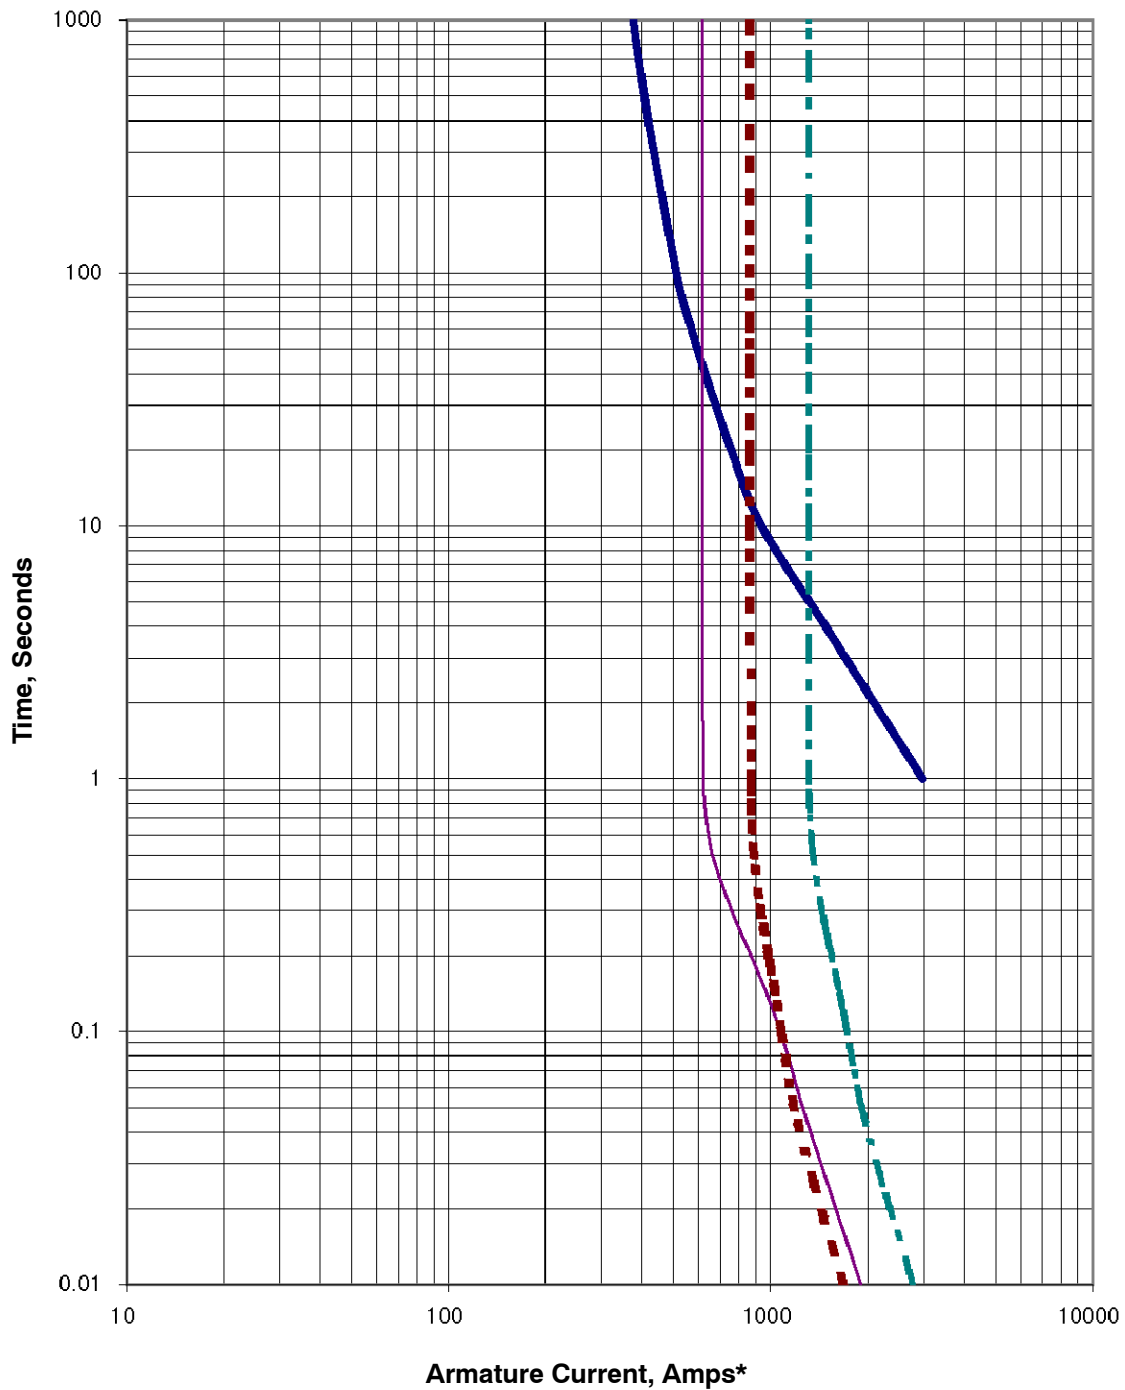

- Alternator Damage Curve
- 3 Phase Symmetrical
- Line-to-Line 1 Phase
- Line-to-Neutral 1 Phase

* Instantaneous current (t=0) is asymmetric. Divide by 1.732 for symmetric.



Sound Data

TECHNICAL INFORMATION BULLETIN
Generator Set Sound Data Sheet

			Sound Pressure Data in dB(A)			
Generator Set Model	Hz	Load	Raw Exhaust	Open Unit, Isolated Exhaust	Weather Enclosure	Sound Enclosure
250REOZJE	60	100% Load	116.5	91.7	89.8	75.2
		No Load	101.7	84.9	83.0	67.1

Note: Sound pressure data is the logarithmic average of eight perimeter measurement points at a distance of 7 m (23 ft.), except Raw Exhaust data which is a single measurement point at 1 m (3.3 ft.) from the mouth of a straight pipe exhaust.

250REOZJE	60 Hz
------------------	--------------

			Sound Pressure Levels dB(A)									
Load	Distance, m (ft.)	Enclosure	Measurement Position	Octave Band Center Frequency (Hz)								Overall Level
				63	125	250	500	1000	2000	4000	8000	
100% Load	7 (23)	Sound	Right	62.7	67.4	67.2	71.8	65.1	60.2	59.3	56.4	75.2
			Front-Right	59.4	66.4	70.6	63.6	66.5	63.2	56.6	53.6	74.2
			Front	61.5	64.9	66.1	70.9	65.0	61.2	58.4	54.1	74.2
			Front-Left	63.0	66.7	67.4	72.2	66.4	62.1	57.4	57.0	75.6
			Left	63.2	67.4	66.8	73.3	66.3	63.2	58.7	61.0	74.8
			Back-Left	61.5	65.4	64.4	71.7	65.2	64.5	59.4	57.4	76.3
			Back	63.9	68.9	67.2	72.7	64.2	64.1	61.6	62.1	74.8
			Back-Right	58.4	64.8	66.5	71.2	66.3	64.7	60.0	55.1	76.3
			8-pos. log avg.	62.0	66.7	67.4	71.6	65.7	63.2	59.2	58.1	75.2

				Sound Pressure Levels dB(A)								
Load	Distance, m (ft.)	Enclosure	Measurement Position	Right	Front-Right	Front	Front-Left	Left	Back-Left	Back	Back-Right	8-pos. log avg.
100% Load	7 (23)	Weather	Overall Levels	88.8	87.2	86.3	91.1	91.9	89.3	82.9	93.1	89.8

				Sound Pressure Levels dB(A)								
Load	Distance, m (ft.)		Measurement Position	Octave Band Center Frequency (Hz)								Overall Level
				63	125	250	500	1000	2000	4000	8000	
100% Load	7 (23)	Open Unit, Isolated Exhaust	Right	60.1	67.5	74.1	74.8	83.3	82.7	79.9	87.8	90.7
			Front-Right	57.0	69.4	75.1	81.6	82.6	83.2	80.4	81.0	89.1
			Front	60.1	70.4	76.6	79.8	83.4	82.4	78.3	76.4	88.2
			Front-Left	68.5	74.9	78.7	83.3	86.4	86.8	82.9	87.2	93.0
			Left	70.1	74.7	77.3	83.1	88.0	88.8	83.3	86.8	93.8
			Back-Left	66.1	74.1	75.6	77.5	84.4	84.6	82.4	86.0	91.2
			Back	62.0	66.4	72.8	76.0	78.6	78.2	76.2	77.2	84.8
			Back-Right	61.7	70.2	74.8	76.3	81.6	82.8	79.2	87.8	95.0
			8-pos. log avg.	65.3	72.0	76.0	80.1	84.3	84.7	80.9	85.5	91.7

			Sound Pressure Levels dB(A)								
Load	Distance, m (ft.)	Exhaust	Octave Band Center Frequency (Hz)								Overall Level
			63	125	250	500	1000	2000	4000	8000	
100% Load	1 (3.3)	Raw Exhaust (No Silencer)	88.8	98.5	105.4	110.5	107.1	109.1	109.7	107.0	116.5

250REOZJE	60 Hz
------------------	--------------

				Sound Pressure Levels dB(A)								
Load	Distance, m (ft.)	Enclosure	Measurement Position	Octave Band Center Frequency (Hz)								Overall Level
				63	125	250	500	1000	2000	4000	8000	
No Load	7 (23)	Sound	Right	49.3	55.7	58.3	62.5	61.1	54.5	50.0	42.1	66.6
			Front-Right	44.0	58.7	64.2	58.5	60.4	57.0	49.8	40.6	67.7
			Front	48.0	54.5	61.0	62.3	60.3	55.0	50.8	41.5	66.8
			Front-Left	48.9	56.4	60.1	63.9	61.9	56.0	48.6	40.1	67.8
			Left	48.1	56.3	59.3	62.3	61.3	54.9	47.9	43.7	66.8
			Back-Left	48.3	55.7	56.3	60.3	59.9	56.2	49.4	41.1	65.4
			Back	51.4	63.0	63.9	59.6	59.5	58.3	56.2	48.2	68.8
			Back-Right	49.7	59.2	56.1	60.1	60.3	57.3	50.8	40.8	66.1
8-pos. log avg.				48.9	58.3	60.8	61.5	60.6	56.3	51.3	43.2	67.1

				Sound Pressure Levels dB(A)								
Load	Distance, m (ft.)	Enclosure	Measurement Position	Right	Front- Right	Front	Front- Left	Left	Back- Left	Back	Back- Right	8-pos. log avg.
No Load	7 (23)	Weather	Overall Levels	82.8	84.5	81.1	85.2	83.0	83.3	78.6	82.5	83.0

				Sound Pressure Levels dB(A)								
Load	Distance, m (ft.)		Measurement Position	Octave Band Center Frequency (Hz)								Overall Level
				63	125	250	500	1000	2000	4000	8000	
No Load	7 (23)	Open Unit, Isolated Exhaust	Right	52.3	62.8	71.1	72.9	81.3	79.2	75.6	67.9	84.7
			Front-Right	49.1	63.9	73.1	79.7	81.3	80.9	77.0	69.4	86.4
			Front	50.6	64.4	72.7	73.4	78.9	77.6	72.3	64.6	83.0
			Front-Left	53.4	66.5	73.6	76.1	83.6	81.8	77.1	70.4	87.1
			Left	57.0	65.0	72.1	73.9	81.2	79.8	75.0	68.1	84.9
			Back-Left	56.6	67.7	70.9	72.0	81.9	79.8	75.4	67.7	85.2
			Back	53.7	65.1	68.2	71.2	77.2	72.1	72.9	59.7	80.5
			Back-Right	52.7	65.6	71.9	75.1	80.0	79.1	75.4	67.7	84.4
			8-pos. log avg.	53.9	65.4	72.0	75.1	81.0	79.5	75.4	67.8	84.9

				Sound Pressure Levels dB(A)								
Load	Distance, m (ft.)	Exhaust		Octave Band Center Frequency (Hz)								Overall Level
				63	125	250	500	1000	2000	4000	8000	
No Load	1 (3.3)	Raw Exhaust (No Silencer)		75.4	83.4	89.2	94.3	95.7	95.9	94.5	88.4	101.7



Emissions Data



250REOZJE

60 HZ. DIESEL INDUSTRIAL GENERATOR SET EMISSION DATA SHEET

ENGINE INFORMATION

Model:	John Deere, 6090HF484B	Bore:	118.4mm (4.66 in.)
Nameplate BHP @ 1800 RPM:	385	Stroke:	136mm (5.35 in.)
Type:	4-Cycle, 6 Cylinder, Inline	Displacement:	9.0 L (548 cu. in.)
Aspiration:	Turbocharged, Charge Air-Cooled	EPA Family:	MJDXL09.0114
Compression Ratio	16.0:1	EPA Certificate:	MJDXL09.0114-006

PERFORMANCE DATA:

Engine bkW @ Stated Load
Fuel Consumption (g/kWh)
Exhaust Gas Flow (m³/min)
Exhaust Temperature (°C)

Table 1			
1/4 Standby	1/2 Standby	3/4 Standby	Full Standby
72	144	215	287
247	248	232	200
			54
			625

EXHAUST EMISSION DATA:

HC (Total Unburned Hydrocarbons)
NOx (Oxides of Nitrogen as NO₂)
CO (Carbon Monoxide)
PM (Particulate Matter)

Table 2	
EPA D2 Cycle 5-mode weighted	
	0.05
	3.80
	0.9
	0.11

Values are in g/kWh unless otherwise noted

TEST METHODS AND CONDITIONS

The emission data listed is measured from a laboratory test engine according to the test procedures of 40 CFR 89 or 40 CFR 1039, as applicable. The test engine is intended to represent nominal production hardware, and there is no guarantee that every production engine will have identical test results. The family parent data represents multiple ratings and this data may have been collected at a different engine speed and load. Emission results may vary due to engine manufacturing tolerances, engine operating conditions, fuels used, alternate test methods, or other conditions.

Data and specifications subject to change without notice.




UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
2022 MODEL YEAR
CERTIFICATE OF CONFORMITY
WITH THE CLEAN AIR ACT

OFFICE OF TRANSPORTATION
AND AIR QUALITY
ANN ARBOR, MICHIGAN 48105

Certificate Issued To: Deere & Company
(U.S. Manufacturer or Importer)
Certificate Number: NJDXL09.0114-007

Effective Date:
08/09/2021
Expiration Date:
12/31/2022


Byron J. Bunker, Division Director
Compliance Division

Issue Date:
08/09/2021
Revision Date:
N/A

Model Year: 2022
Manufacturer Type: Original Engine Manufacturer
Engine Family: NJDXL09.0114

Mobile/Stationary Indicator: Stationary
Emissions Power Category: 225<=kW<450
Fuel Type: Diesel
After Treatment Devices: No After Treatment Devices Installed
Non-after Treatment Devices: Electronic Control, Smoke Puff Limiter, Engine Design Modification, Non-standard Non-After Treatment Device Installed

Pursuant to Section 111 and Section 213 of the Clean Air Act (42 U.S.C. sections 7411 and 7547) and 40 CFR Part 60, and subject to the terms and conditions prescribed in those provisions, this certificate of conformity is hereby issued with respect to the test engines which have been found to conform to applicable requirements and which represent the following engines, by engine family, more fully described in the documentation required by 40 CFR Part 60 and produced in the stated model year.


This certificate of conformity covers only those new compression-ignition engines which conform in all material respects to the design specifications that applied to those engines described in the documentation required by 40 CFR Part 60 and which are produced during the model year stated on this certificate of the said manufacturer, as defined in 40 CFR Part 60.


It is a term of this certificate that the manufacturer shall consent to all inspections described in 40 CFR 1068 and authorized in a warrant or court order. Failure to comply with the requirements of such a warrant or court order may lead to revocation or suspension of this certificate for reasons specified in 40 CFR Part 60. It is also a term of this certificate that this certificate may be revoked or suspended or rendered void *ab initio* for other reasons specified in 40 CFR Part 60.

This certificate does not cover engines sold, offered for sale, or introduced, or delivered for introduction, into commerce in the U.S. prior to the effective date of the certificate.






Dimensional Drawings

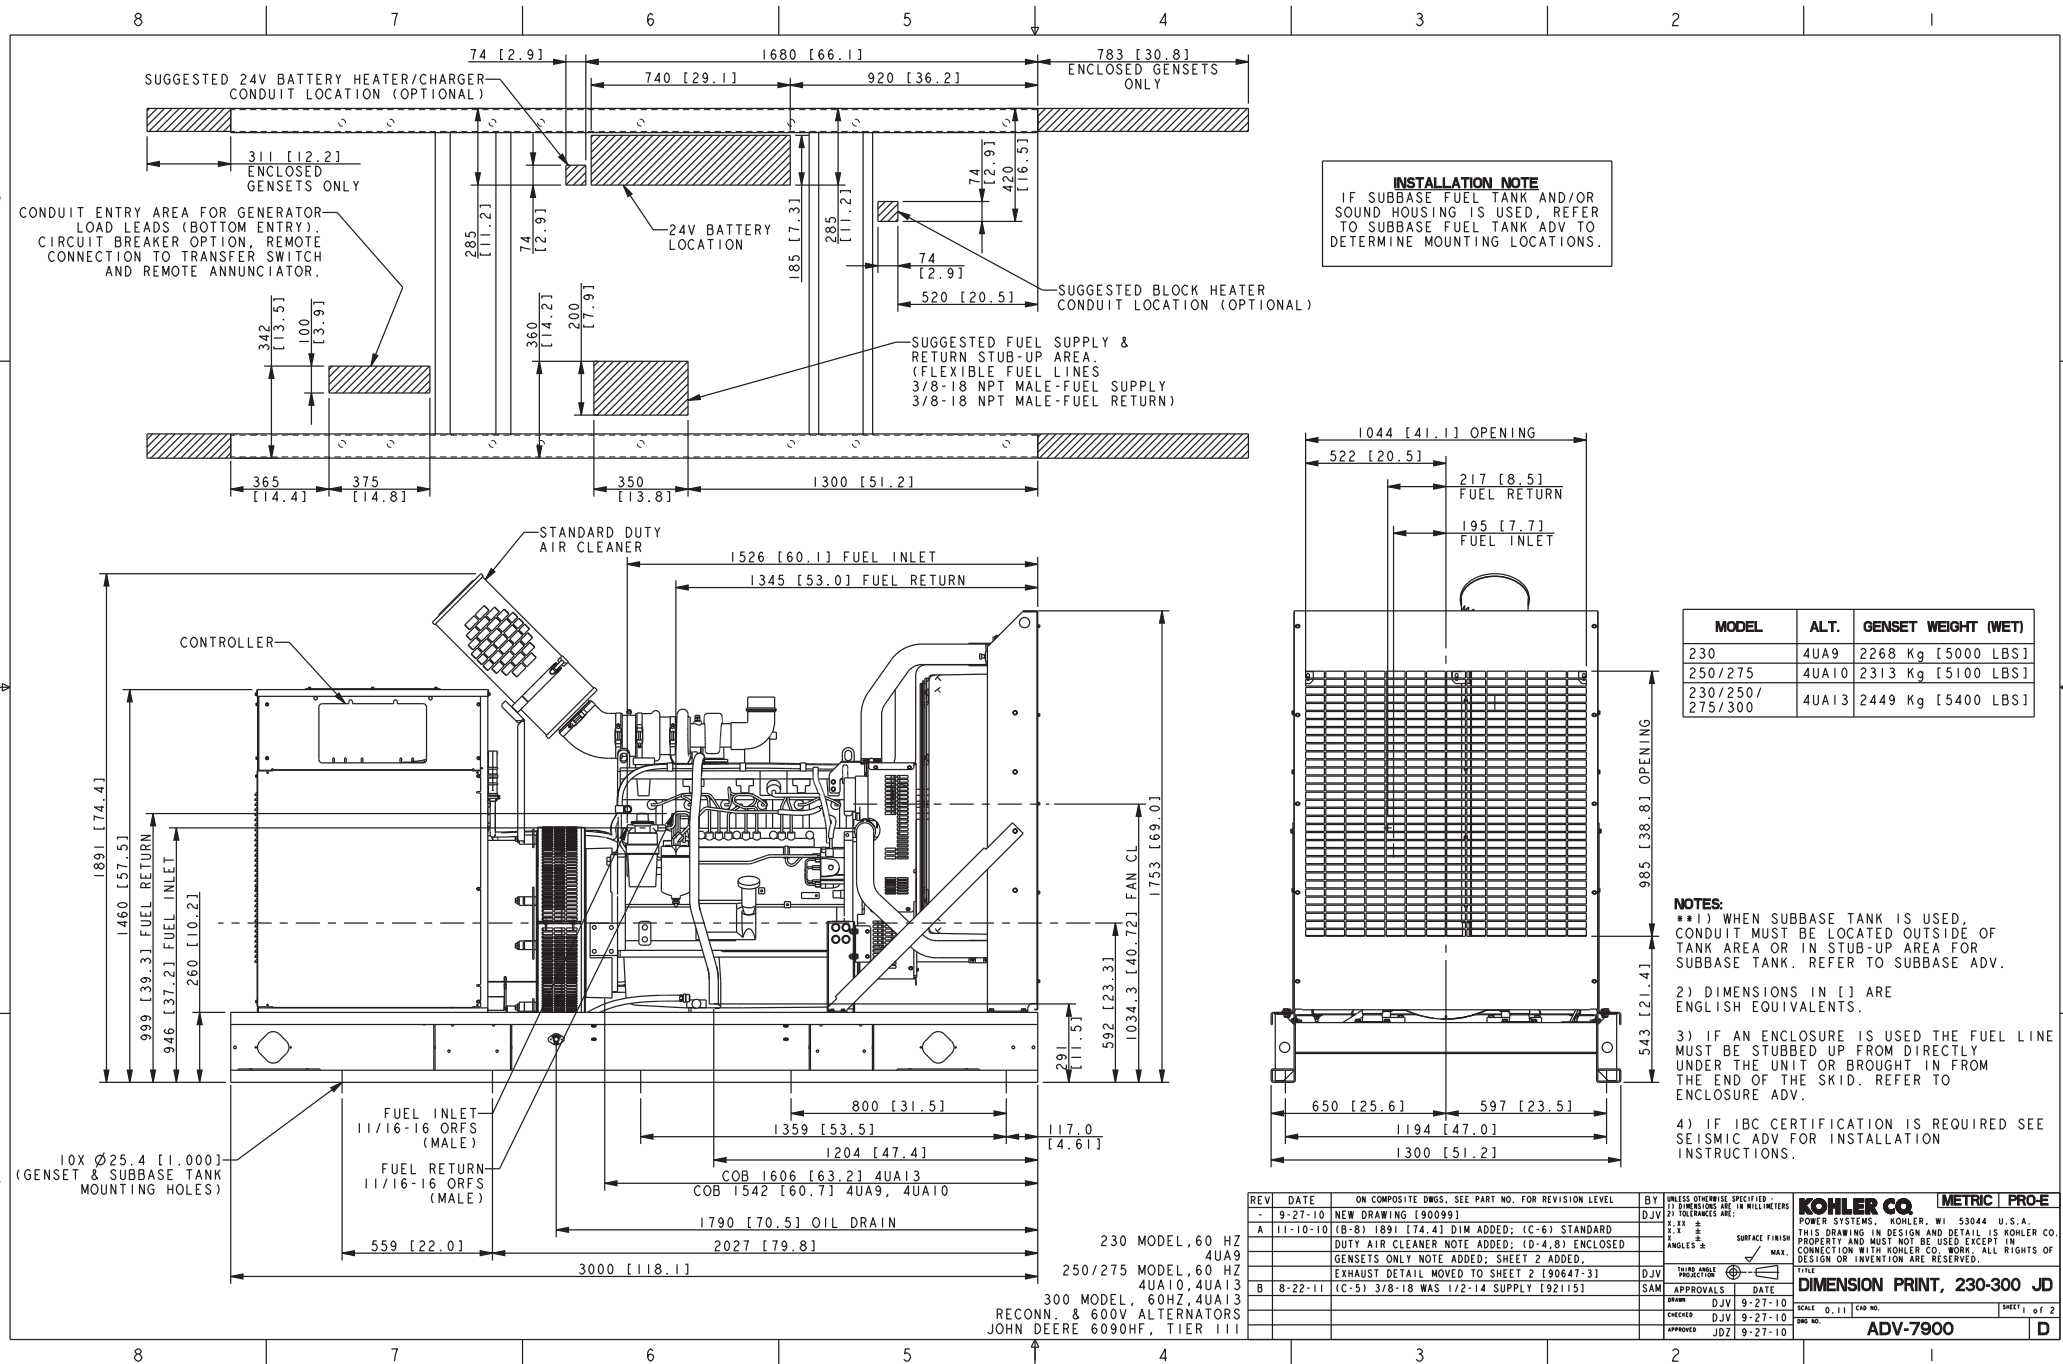

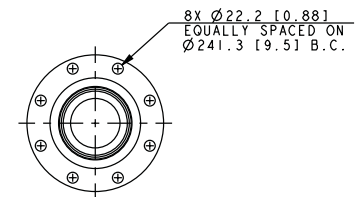


6" ANSI FLANGE
(B16.5 CLASS 150)
SCALE 0.20

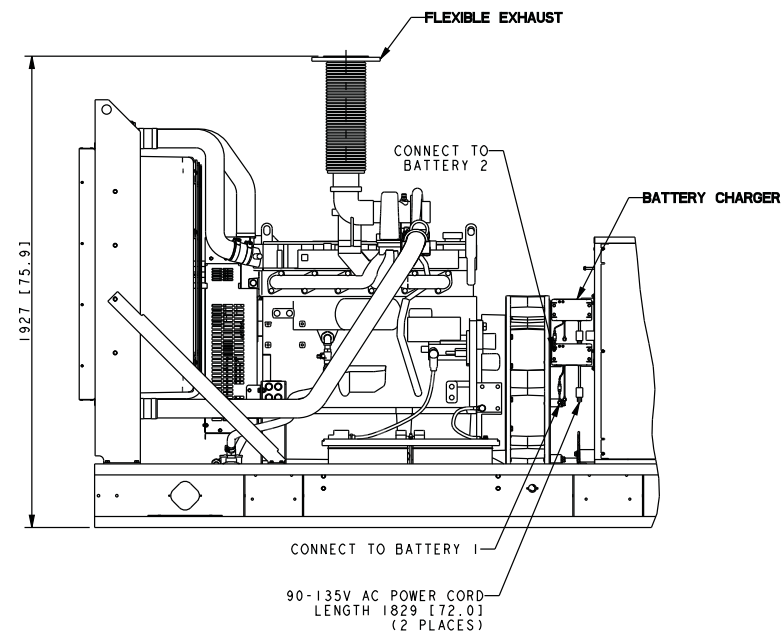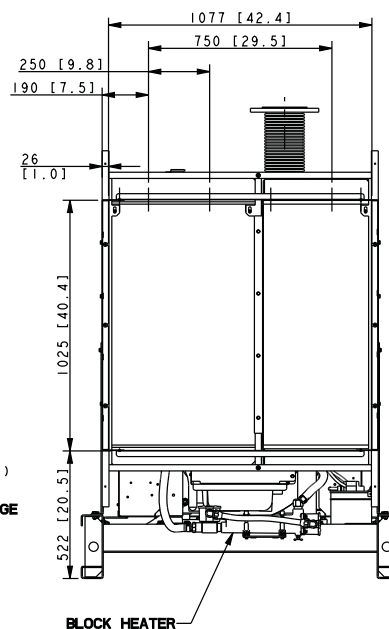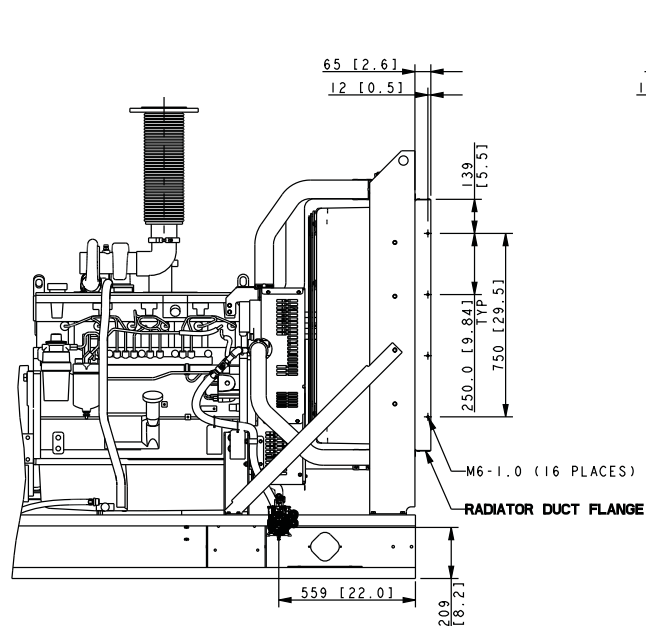




DIMENSIONS IN [] ARE INCH EQUIVALENTS

REV	DATE	ON COMPOSITE DWGS. SEE PART NO. FOR REVISION LEVEL	BY	UNLESS OTHERWISE SPECIFIED: 1) DIMENSIONS ARE IN MILLIMETERS 2) DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE 3) TYPICAL 4) DIMENSIONS ARE TO CENTER UNLESS NOTED OTHERWISE 5) DIMENSIONS ARE TO SURFACE UNLESS NOTED OTHERWISE	KOHLER CO. METRIC PRO-E 1000 EAST 10TH AVE. KOHLER, WI 53044 U.S.A. THIS DRAWING IN DESIGN AND DETAIL IS KOHLER CO. PROPERTY AND MUST NOT BE USED OR REPRODUCED WITHOUT THE WRITTEN CONSENT OF KOHLER CO. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.
	- 10-15-10	NEW DRAWING [90099]	DJV	SURFACE FINISH MAX.	
				TITLE DIMENSION PRINT, ACCESSORY, 230-300 J	
				SCALE 0, 10 CAD NO.	
				SHEET OF	
				ADV-7890	
				D	



20-300KW
CONTROLLER

REV	DATE	NO	DESCRIPTION	BY	DATE	<div> <div> UNLESS OTHERWISE SPECIFIED: 1. DIMENSIONS ARE IN INCHES 2. DIMENSIONS ARE TO FACE UNLESS NOTED OTHERWISE 3. TYPICAL 4. SURFACE FINISH 5. ANGLE 88° 6. MAX. </div> <div> </div> </div>
-	10-15-10		NEW DRAWING [9009]	DJV		<div> <div> KOHLER CO. METRIC PRO-E 1000 EAST 10TH AVE., KOHLER, WI 53044 U.S.A. THIS DRAWING IN DESIGN AND DETAIL IS KOHLER CO. PROPERTY AND MUST NOT BE USED OR REPRODUCED IN CONNECTION WITH KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED. </div> <div> TITLE DIMENSION PRINT, CONTROLLER </div> </div>
						<div> <div> APPROVALS </div> <div> <div>DATE</div> <div>DATE</div> </div> </div>
						<div> <div> APPROVED </div> <div> DJV 10-15-10 </div> </div>
						<div> <div> CHECKED </div> <div> DJV 10-15-10 </div> </div>
						<div> <div> APPROVED </div> <div> DJV 10-15-10 </div> </div>
						<div> <div> SCALE 0.40 </div> <div> CAD NO. </div> </div>
						<div> <div> DRG NO. </div> <div> ADV-7935 </div> </div>
						<div> <div> SHEET 0 of 1 </div> <div> D </div> </div>

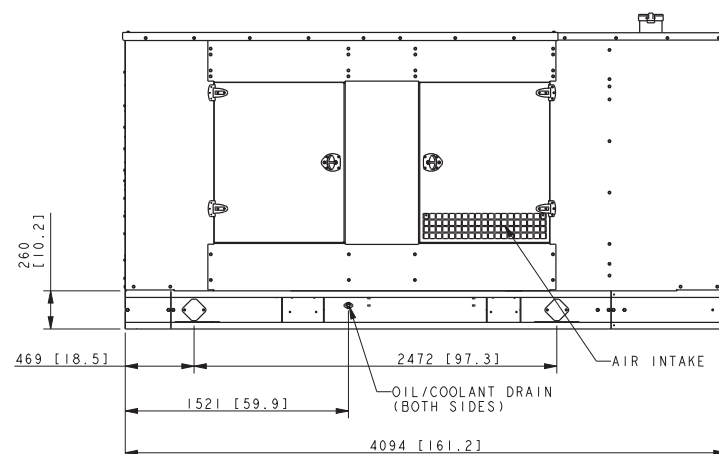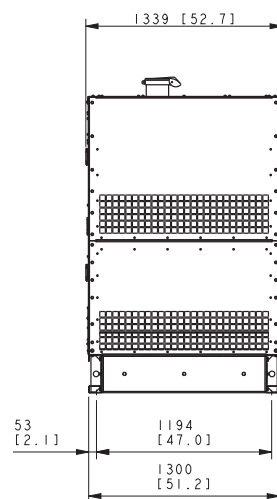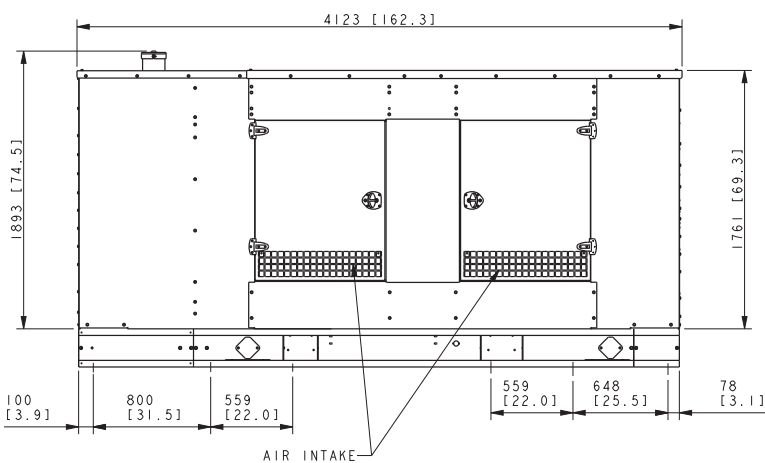





MODEL	ENCLOSURE WEIGHT KG [LBS]
STEEL WEATHER	363 [800]
STEEL SOUND	386 [850]
ALUMINIUM SOUND	238 [525]

1. IF STANDARD TANK IS ORDERED, ENCLOSURE MOUNTS DIRECTLY TO TANK
2. IF STATE TANK IS ORDERED, TANK MOUNTS BELOW SKID
3. TANK MAY EXTEND BEYOND ENCLOSURE (DISCHARGE END ONLY)
4. FOR STUB-UP ACCESS DURING INSTALLATION THE REAR ENCLOSURE PANEL SHOULD BE REMOVED.

230-300 MODEL
JOHN DEERE TIER III

REV	DATE	ON COMPOSITE DWG(S) DATE PART NO. FOR REVISION LEVEL	BY	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS TOLERANCES ARE: FRACTIONS DECIMALS HOLE POSITION ± 0.13 HOLE DIA. ± 0.13 SURFACE FINISH 3.2	
E	10-31-12	SHEET 2 WAS SHEET 1, ADDED SHEET 1 [CT28612]	CEK		
F	2-5-13	[A-1] 1-4 WAS 1-2, SEE SHEET 3 AND 4 [CT31274]	SAM		
G	8-4-17	[D-1] DIM. Ø152, 4 (6.00) ADDED [CT177004]	YFR		
H	11-22-18	VIEWS UPDATED, SEE SHEET 2, 3 & 4 [CT191932]			

MODEL	ENCLOSURE WEIGHT KG [LBS]
STEEL WEATHER	363 [800]
STEEL SOUND	386 [850]
ALUMINIUM SOUND	238 [525]

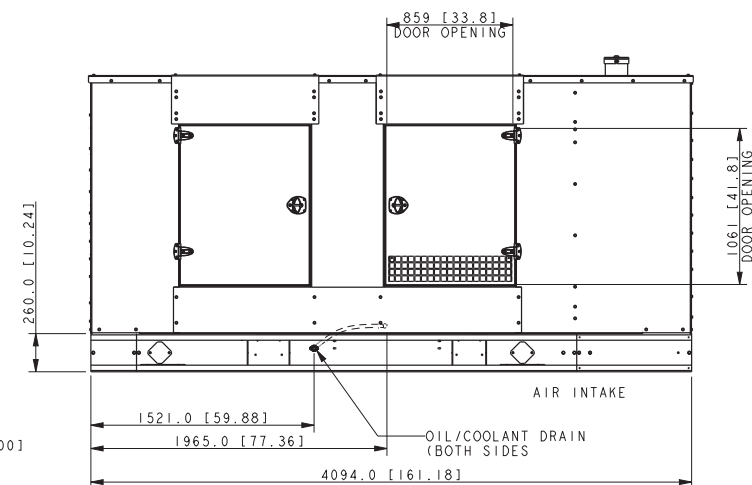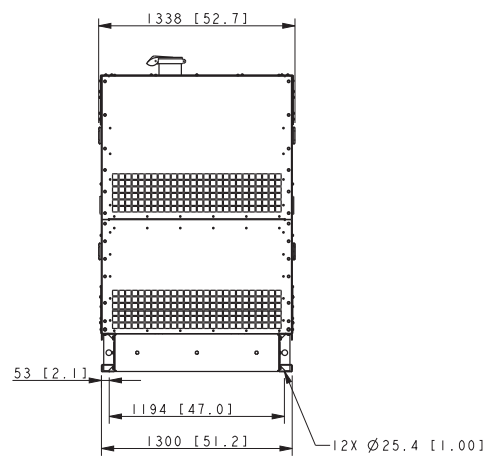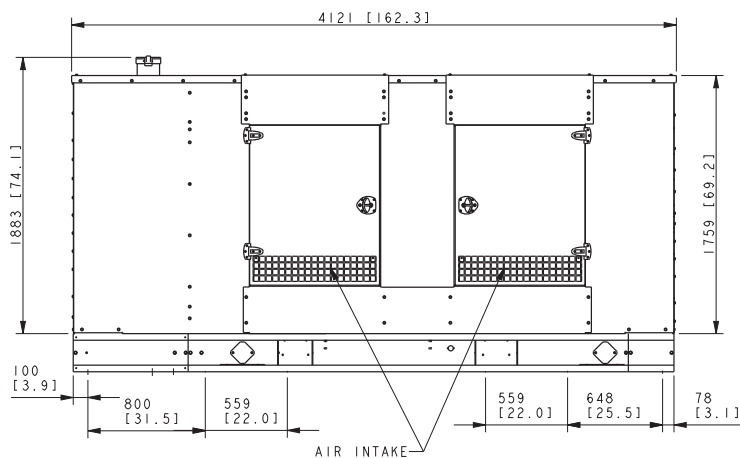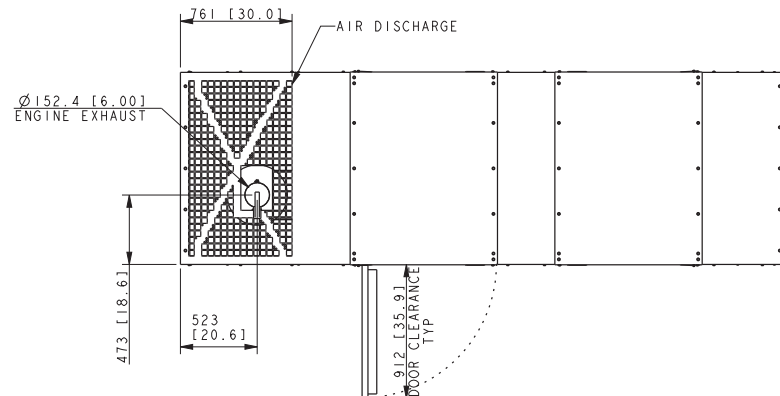

NOTE:

1. IF STANDARD TANK IS ORDERED, ENCLOSURE MOUNTS DIRECTLY TO TANK
2. IF STATE TANK IS ORDERED, TANK MOUNTS BELOW SKID
3. TANK MAY EXTEND BEYOND ENCLOSURE (DISCHARGE END ONLY)
4. FOR STUB-UP ACCESS DURING INSTALLATION THE REAR ENCLOSURE PANEL SHOULD BE REMOVED.


DIMENSIONS IN [] ARE IN ENGLISH EQUIVALENTS.

230-300 MODEL
JOHN DEERE TIER III
IBC/ OSHPD

REV	DATE	ON COMPOSITE DWGS. SEE PART NO. FOR REVISION LEVEL	BY	UNLESS OTHERWISE SPECIFIED: 1) DIMENSIONS ARE IN MILLIMETERS 2) TOLERANCES ARE: X.XX ± 0.25 X.X ± 0.15 ANGLES ± 0° 30' MAX.	DATE	DATE	DATE
B	10-7-10	(D-6) 523 WAS 588, (C-6) 761 WAS 713, (B-2) 4121.4 WAS 4100.0 [90099-5]	RJS				
C	3-16-11	(A-8) 260.0 WAS 200.0 [91189]	SAM				
D	6-20-11	(C-3) STUB-UP NOTE ADDED [91752]	SAM				
E	10-31-12	SHEET2 WAS SHEET 1, ADDED SHEET 1 [CT28612]	CEK				
F	2-5-13	(A-1) 2-4 WAS 2-2, SEE SHEET 3 AND 4 [CT32174]	SAM				
G	8-4-17	(C-5) DIM. Ø152.4 (6.00) ADDED; SEE SHEET 1 [CT177004]	SRM				
H	11-22-18	VIEWS UPDATED, SEE SHEET 1, 3 & 4 [CT191932]	YPM				

POWER SYSTEMS - KOHLER, WI 53044 U.S.A.	METRIC	PRO-E
THIS DRAWING IN DESIGN AND DETAIL IS KOHLER CO. PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.		
TITLE		
DIMENSION PRINT 230-300KW JD		
SCALE 0.06	CAD NO.	SHEET 2 of 4
ADV-7644		D




MODEL	CAPACITY L [GAL]	WEIGHT KG [LBS]	HEIGHT MM [IN]	LENGTH MM [IN]	EMERGENCY VENT (A) INNER / SECONDARY [IN]
230-275kW	1786 L [472 GAL]	911 KG [2009 LBS]	762 MM [30 IN]	4094 MM [161.2 IN]	4 / 4
300kW	2070 L [546 GAL]	939 KG [2070 LBS]	838.2 MM [33 IN]	4094 MM [161.2 IN]	4 / 5
THIS IS AN AUTOMATED TABLE. ALL CHANGES TO THIS TABLE MUST BE MADE IN THE FAMILY TABLE OF THE GENERIC MODEL.					

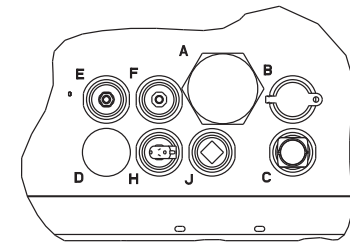

DETAIL A
SCALE 0.200

TANK FITTINGS:

- A. EMERGENCY VENT FITTING PER NFPA 30 WITH VENT CAPS (QTY 2).
- B. 2" NPT FUEL FILL FITTING WITH LOCKABLE CAP AND 2" RISER.
- C. 2" NPT FUEL LEVEL GAUGE FITTING WITH DIRECT READING MECHANICAL GAUGE.
- D. 2" NPT NORMAL VENT FITTING WITH MUSHROOM VENT CAP AND 5" RISER.
- E. 2" NPT FITTING FOR REMOVABLE ENGINE SUPPLY DIP TUBE (3/8" NPT FEMALE WITH CHECK VALVE).
- F. 2" NPT FITTING FOR REMOVABLE FUEL RETURN DIP TUBE (3/8" NPT FEMALE).
- H. 2" NPT FOR LOW LEVEL SWITCH (SET AT 50% FULL, SILICONE PACKED).
- J. 2" NPT ADDITIONAL FITTING FOR OPTIONAL ACCESSORY (INSTALL STEEL 2" NPT PIPE PLUG).
- M. 1/2" NPT BASIN DRAIN (INSTALL STEEL 1/2" NPT PIPE PLUG).
- N. 1/2" NPT FOR FUEL IN BASIN SWITCH (INSTALL STEEL 1/2" NPT PIPE PLUG).

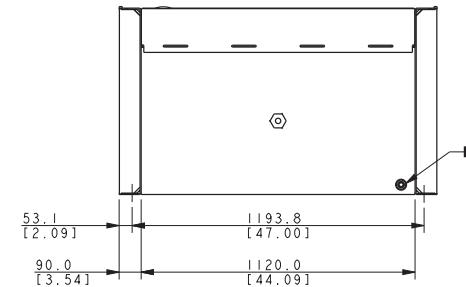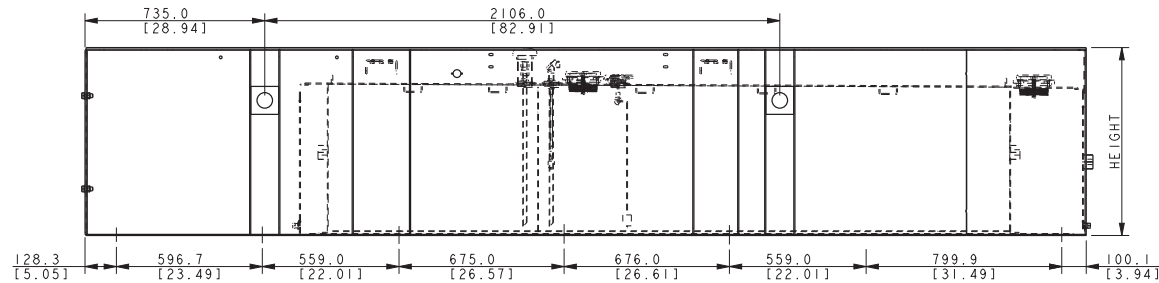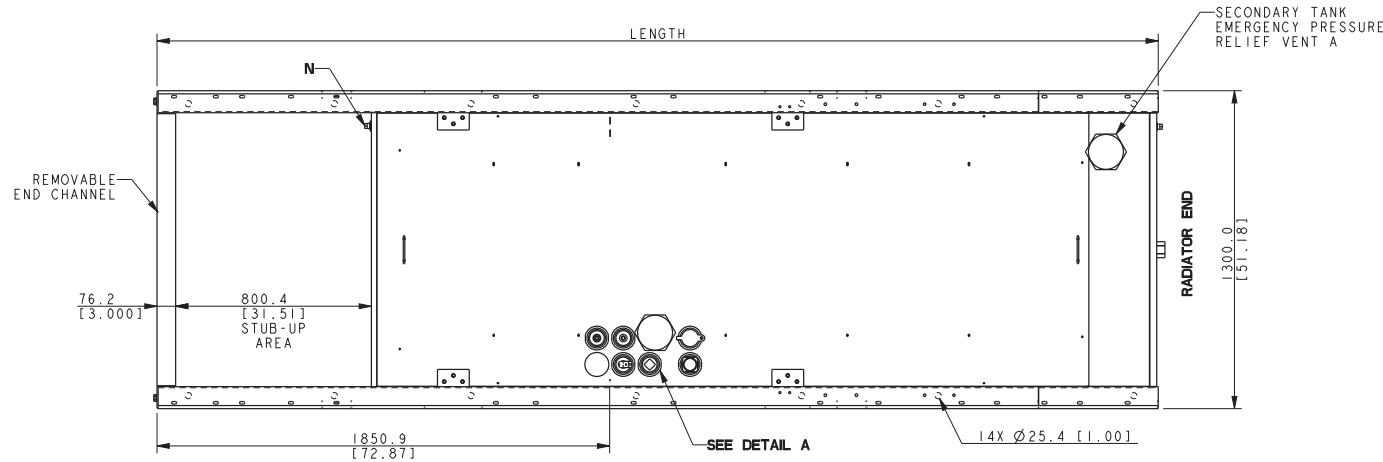

NOTE:


FOR FURTHER TANK DETAIL
SEE INDIVIDUAL DRAWINGS.

230-300KW
JOHN DEERE TIER III
STANDARD CODE TANK


REV		DATE	ON COMPOSITE DWGS. SEE PART NO. FOR REVISION LEVEL	BY	UNLESS OTHERWISE SPECIFIED: 1) DIMENSIONS ARE IN MILLIMETERS 2) TOLERANCES ARE: X.XX ± 0.25 X.X ± 0.15 X ± 0.5 ANGLES ± 0° 30'	THIRD ANGLE PROJECTION	APPROVALS	DATE
A	11-17-09		SEE SHEET 2 OF 2. (C-4) 14X Ø25.4 WAS 12X (A-6) 675.0 AND 676.0 ADDED. [88481]	GFR				
B	10-7-10		(D-8) STANDARD TANK TABLE ADDED [90099-6]	RJS				
C	12-2-11		VIEWS UPDATED [92417-5]	SDS				
D	5-8-12		SEE SHEETS 2 & 3. SHEET 3 ADDED [CT13297]	JB2				
E	10-21-15		SEE SHEET 3 OF 3. [CT128239]	GFR				
F	11-17-17		(D-5) 546 GAL., SECONDARY VENT 5" WAS 4", TABLE UPDATED [CT181456]	JB2				
G	7-31-19		SEE SHEET 2 [CT197533]	PAS				

KOHLER CO. METRIC PRO-E
POWER SYSTEMS, KOHLER, WI 53044 U.S.A.
THIS DRAWING IN DESIGN AND DETAIL IS KOHLER CO. PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.
TITLE: **DIMENSION PRINT**
SCALE: 0.10 CAD NO.: SHEET 1 of 3
DWG NO.: **ADV-7645** D

MODEL	CAPACITY L [GAL]	WEIGHT KG [LBS]	HEIGHT MM [IN]	LENGTH MM [IN]	E - VENTS SIZE (QTY)
230-300kW	2102 L [555 GAL]	1242 KG [2738 LBS]	635 MM [25 IN]	5008 MM [197.2 IN]	5 (2)
230-275kW	3573 L [944 GAL]	1851 KG [4081 LBS]	914.4 MM [36 IN]	5325 MM [209.7 IN]	5 (2)
THIS IS AN AUTOMATED TABLE. ALL CHANGES TO THIS TABLE MUST BE MADE IN THE FAMILY TABLE OF THE GENERIC MODEL.					

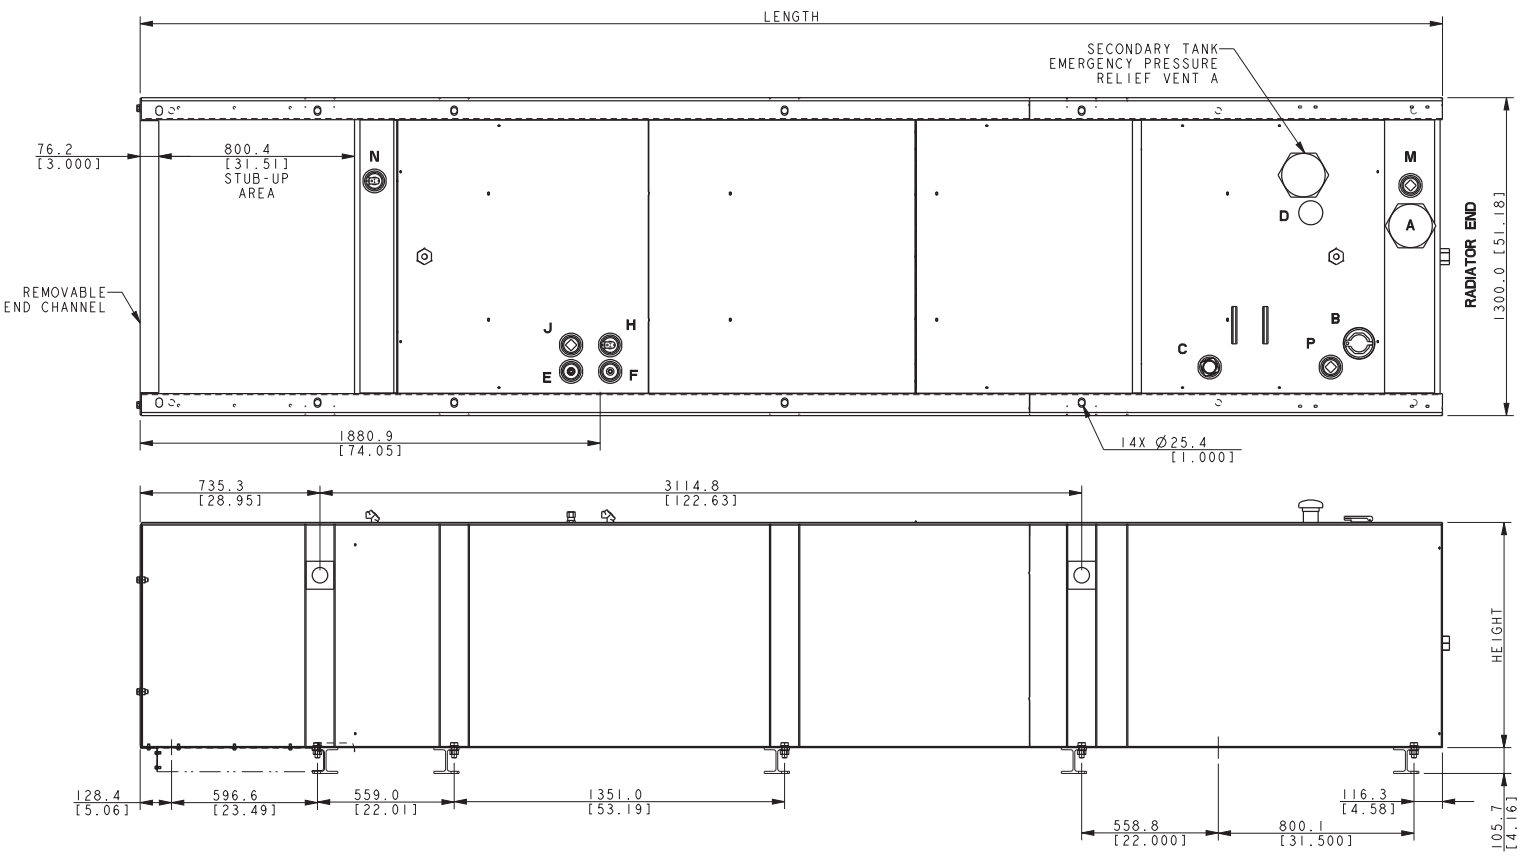

- TANK FITTINGS:**
- A. EMERGENCY VENT FITTING PER NFPA 30 WITH VENT CAPS (QTY 2).
 - B. 2" NPT FUEL FILL FITTING WITH LOCKABLE CAP AND 2" RISER.
 - C. 2" NPT FUEL LEVEL GAUGE FITTING WITH DIRECT READING MECHANICAL GAUGE.
 - D. 2" NPT NORMAL VENT FITTING WITH MUSHROOM VENT CAP AND 5" RISER.
 - E. 2" NPT FITTING FOR REMOVABLE ENGINE SUPPLY DIP TUBE (3/8" NPT FEMALE WITH CHECK VALVE).
 - F. 2" NPT FITTING FOR REMOVABLE FUEL RETURN DIP TUBE (3/8" NPT FEMALE).
 - H. 2" NPT FOR LOW LEVEL SWITCH (SET AT 50% FULL, SILICONE PACKED).
 - J. 2" NPT ADDITIONAL FITTING FOR OPTIONAL ACCESSORY (INSTALL STEEL 2" NPT PIPE PLUG).
 - M. 2" NPT BASIN DRAIN (INSTALL STEEL 2" NPT PIPE PLUG).
 - N. 2" NPT FOR FUEL IN BASIN SWITCH.
 - P. 2" NPT ADDITIONAL FITTING FOR OPTIONAL ACCESSORY (INSTALL STEEL 2" NPT PIPE PLUG).

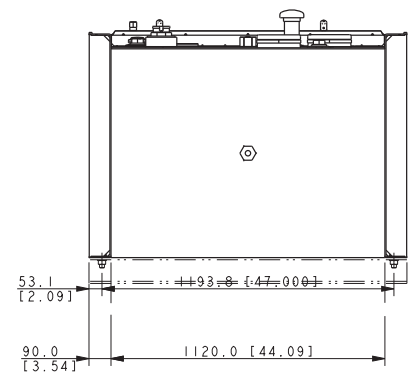

NOTE:
FOR FURTHER TANK DETAIL
SEE INDIVIDUAL DRAWINGS.

**230-300kW
JOHN DEERE TIER III
STATE CODE TANK**

REV	DATE	ON COMPOSITE DWGS. SEE PART NO. FOR REVISION LEVEL	BY	UNLESS OTHERWISE SPECIFIED: 1) DIMENSIONS ARE IN MILLIMETERS 2) TOLERANCES ARE: FRACTIONS DECIMALS X.XX ± 0.25 X.X ± 0.15 X ± 0.5 ANGLES ± 0° 30' MAX.
A	11-18-09	SEE SHEET 1 OF 2. (D-7) 800.4 ADDED. [88481]	GFR	
B	10-7-10	(D-8) STATE TANK TABLE ADDED [90099-6]	RJS	
C	12-2-11	VIEWS UPDATED [92417-5]	SOS	
D	5-8-12	SEE SHEET 3, (D-8) 300 KW MOVED TO SHEET 3, (D-3) FITTING NOTES REVISED [CT13297]	JB2	
E	10-21-15	SEE SHEET 3 OF 3. [CT128239]	GFR	
F	11-17-17	SEE SHEET 1 [CT181456]	JB2	
G	7-31-19	(D-5) EMERGENCY VENTS FOR 555 GAL: 5" WAS 4" [CT197533]	PAS	

APPROVALS

DATE

10-27-08

DATE

10-27-08

DATE

10-27-08

TITLE

DIMENSION PRINT

SCALE 0.10

CAD NO.


SHEET 2 of 3

ADV-7645


D

DIMENSIONS IN [] ARE ENGLISH EQUIVALENTS.

MODEL	CAPACITY L [GAL]	WEIGHT KG [LBS]	HEIGHT MM [IN]	LENGTH MM [IN]	E - VENTS SIZE (QTY)
300kW	4066 L [1074 GAL]	1809 KG [3989 LBS]	914.4 MM [36 IN]	5588 MM [220.0 IN]	6 (2)
THIS IS AN AUTOMATED TABLE. ALL CHANGES TO THIS TABLE MUST BE MADE IN THE FAMILY TABLE OF THE GENERIC MODEL.					

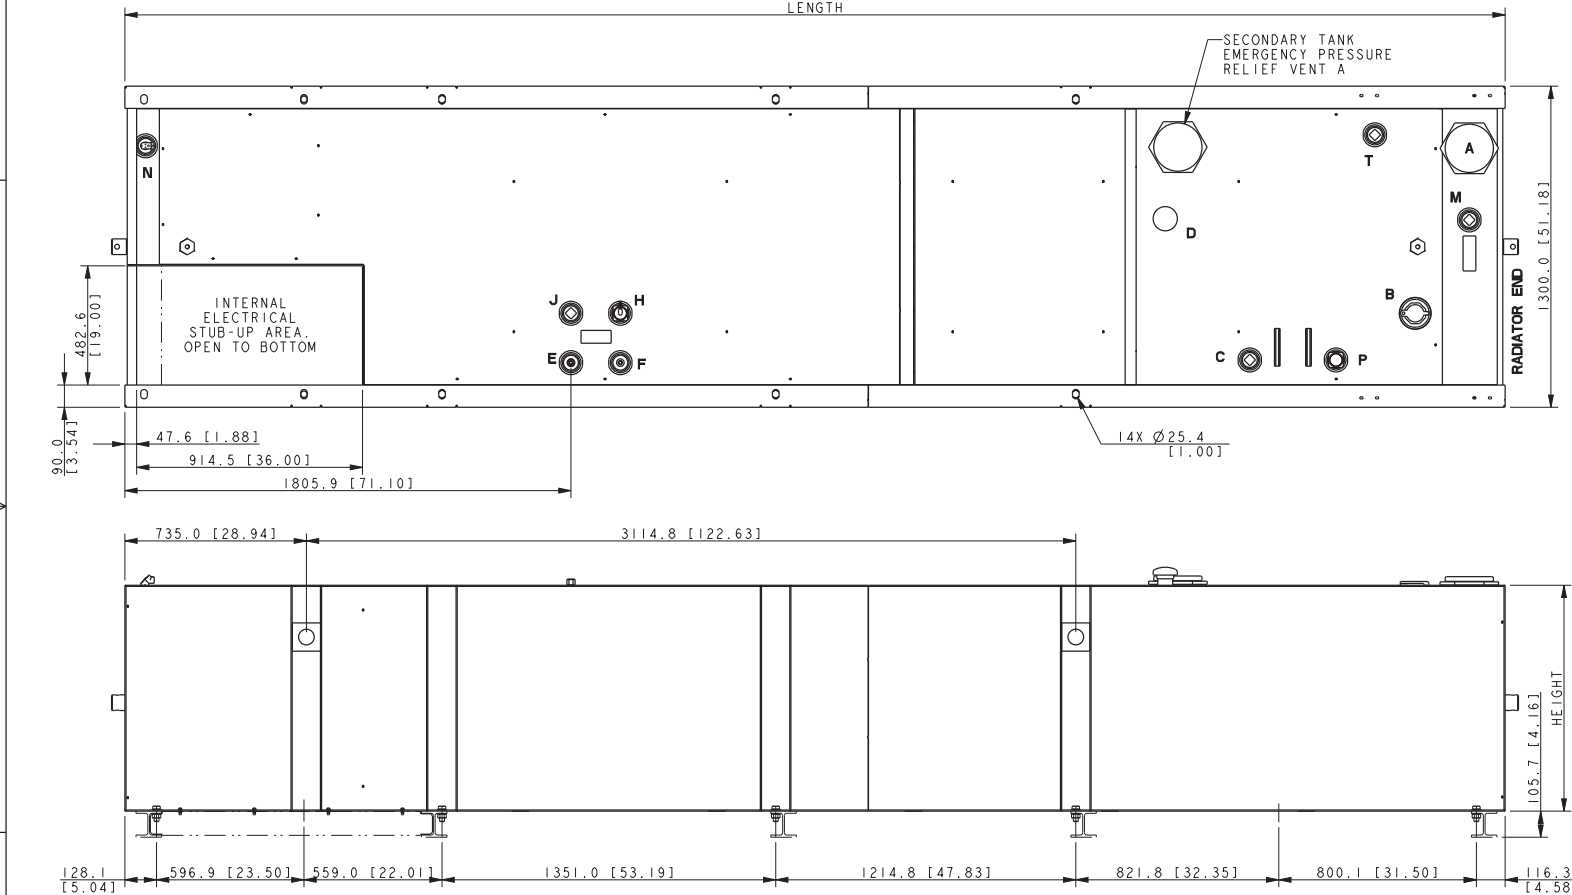

- TANK FITTINGS:**
- A. EMERGENCY VENT FITTING PER NFPA 30 WITH VENT CAPS (QTY 2).
 - B. 2" NPT FUEL FILL FITTING WITH LOCKABLE CAP AND 2" RISER.
 - C. 2" NPT FUEL LEVEL GAUGE FITTING WITH DIRECT READING MECHANICAL GAUGE.
 - D. 2" NPT NORMAL VENT FITTING WITH MUSHROOM VENT CAP AND 5" RISER.
 - E. 2" NPT FITTING FOR REMOVABLE ENGINE SUPPLY DIP TUBE (3/8" NPT FEMALE WITH CHECK VALVE).
 - F. 2" NPT FITTING FOR REMOVABLE FUEL RETURN DIP TUBE (3/8" NPT FEMALE).
 - H. 2" NPT FOR FUEL LEVEL SENDER.
 - J. 2" NPT ADDITIONAL FITTING FOR OPTIONAL ACCESSORY (INSTALL STEEL 2" NPT PIPE PLUG).
 - M. 2" NPT BASIN DRAIN (INSTALL STEEL 2" NPT PIPE PLUG).
 - N. 2" NPT FOR FUEL IN BASIN SWITCH.
 - P. 2" NPT ADDITIONAL FITTING FOR OPTIONAL ACCESSORY (INSTALL STEEL 2" NPT PIPE PLUG).
 - T. 2" NPT ADDITIONAL FITTING FOR OPTIONAL ACCESSORY (INSTALL STEEL 2" NPT PIPE PLUG).

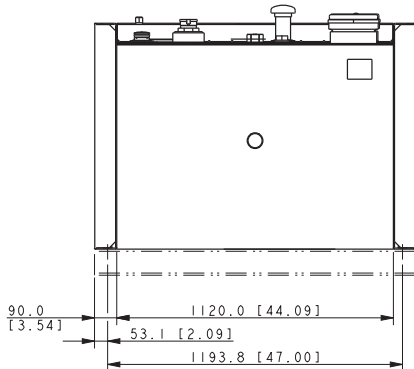

NOTE:
FOR FURTHER TANK DETAIL
SEE INDIVIDUAL DRAWINGS.

300KW
JOHN DEERE TIER III
STATE CODE TANK

REV	DATE	ON COMPOSITE DWGS. SEE PART NO. FOR REVISION LEVEL	BY	UNLESS OTHERWISE SPECIFIED: 1) DIMENSIONS ARE IN MILLIMETERS 2) TOLERANCES ARE: F 11-17-17 SEE SHEET 1 [CT181456] G 7-31-19 SEE SHEET 2 [CT197533]	DATE	APPROVALS	DATE	APPROVALS
D	5-8-12	SEE SHEET 2, (D-2) FITTING NOTES REVISED [CT13297]	JB2		5-8-12			
E	10-21-15	(D-5) E-VENT: 6 WAS 5. [CT128239]	GFR		5-8-12			
F	11-17-17	SEE SHEET 1 [CT181456]	JB2		5-8-12			
G	7-31-19	SEE SHEET 2 [CT197533]	PAS		5-8-12			
				THIRD ANGLE PROJECTION				
				DRAWING NO. ADV-7645				
				SHEET 3 OF 3				

<

KOHLER CO. METRIC PRO-E

POWER SYSTEMS, KOHLER, WI 53044 U.S.A.


THIS DRAWING IN DESIGN AND DETAIL IS KOHLER CO. PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.


PRINT, DIMENSION

SCALE 0.10 CAD NO. ADV-7645



Wiring Schematics

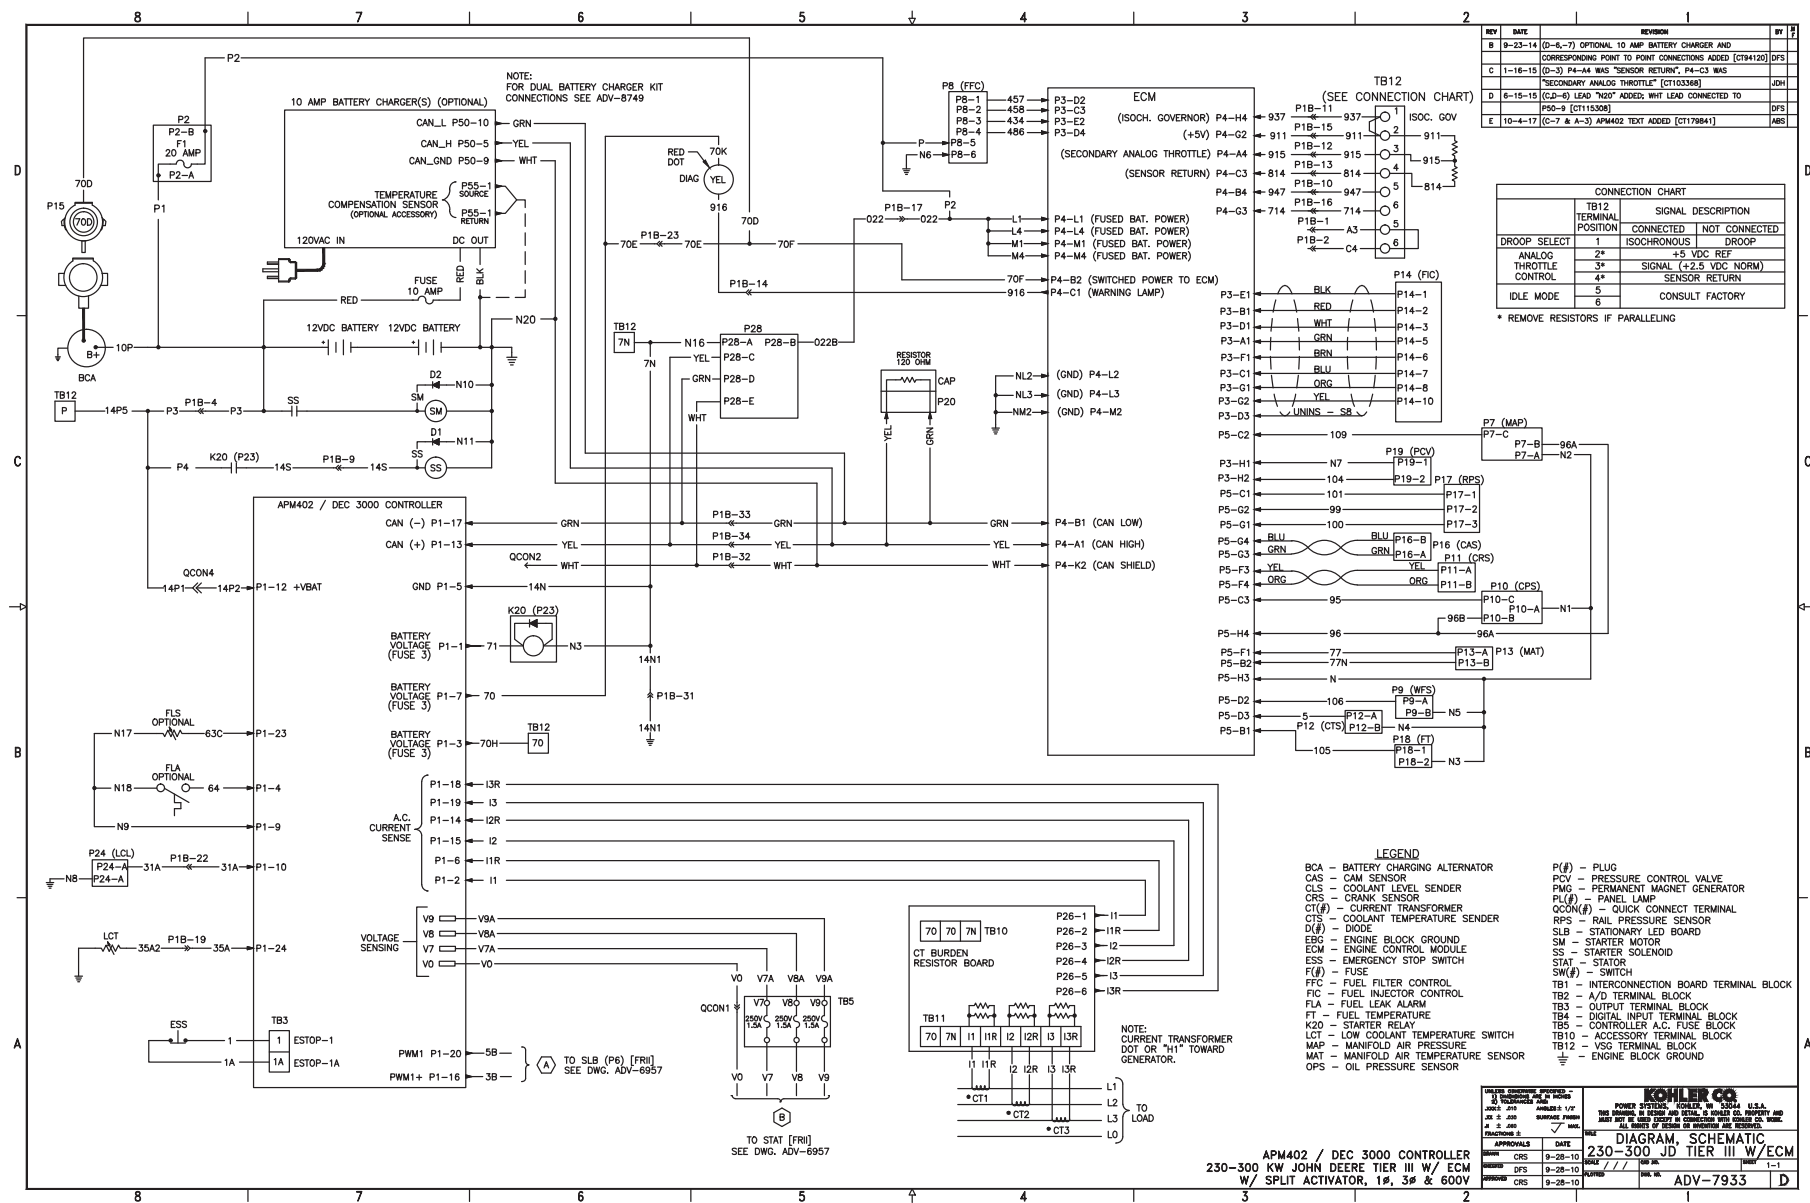

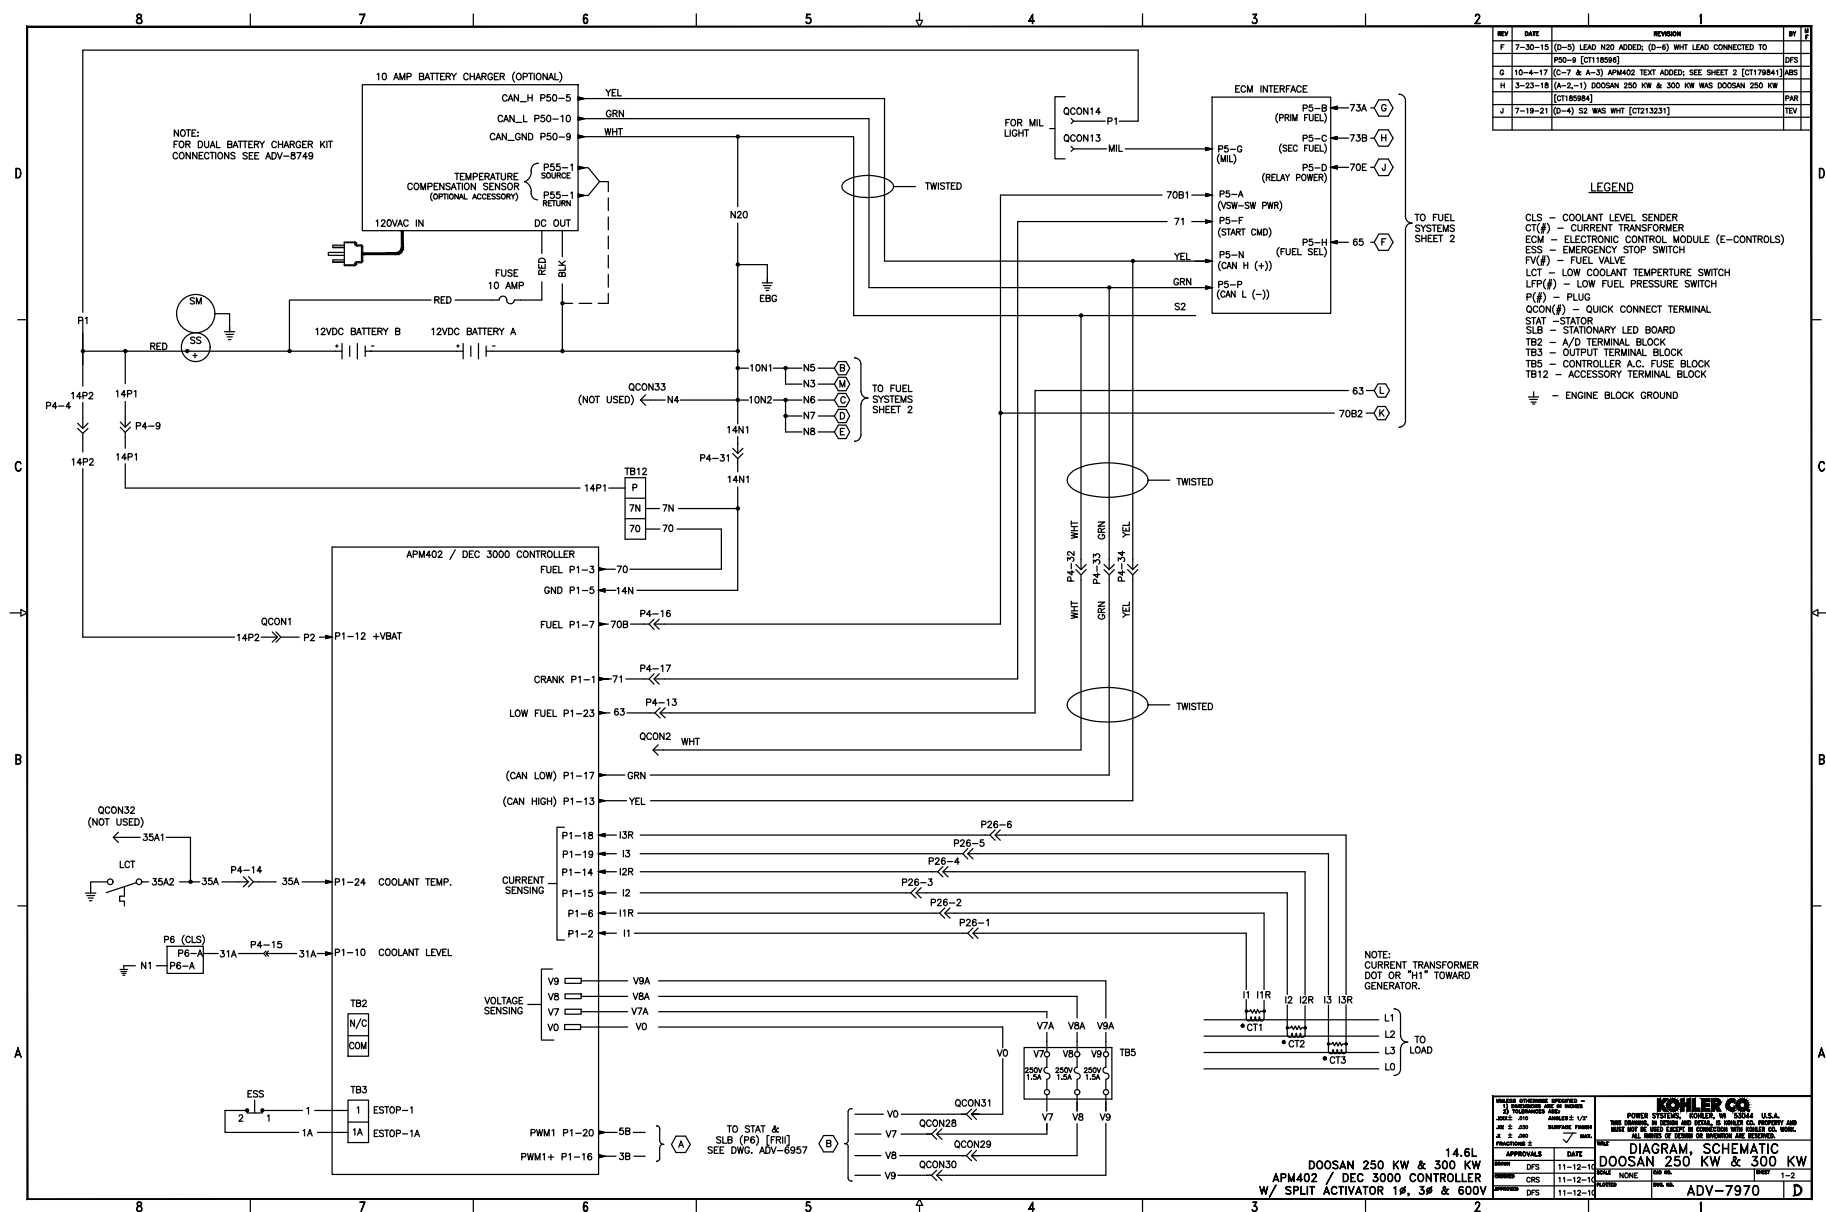

8

7

6

5

4





3

2




1


FUEL SYSTEMS


NATURAL GAS

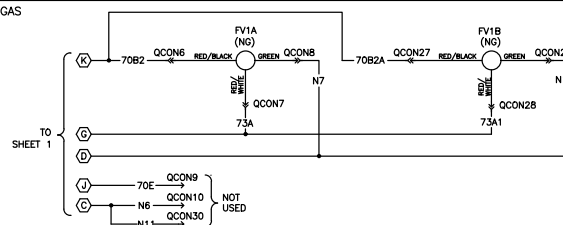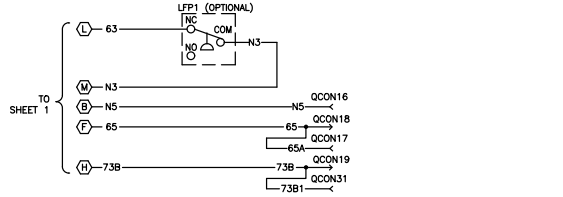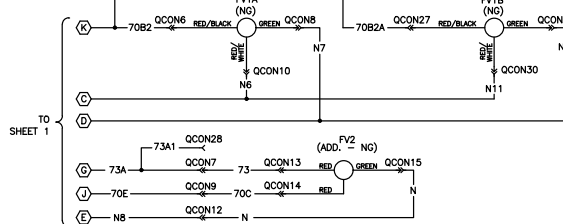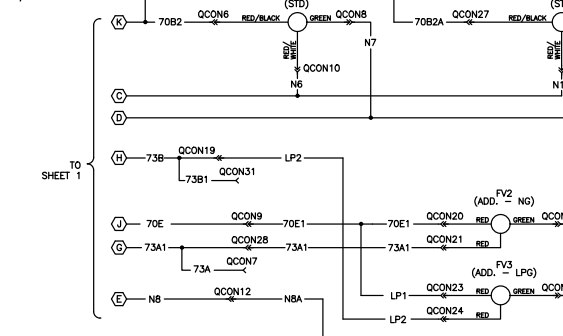
ADDITIONAL FUEL VALVE KIT (OPTION)
(REQUIRED FOR U.L. APPROVAL)AUTO CHANGEOVER
NATURAL GAS/L.P. VAPOR

LPG LIQUID OR VAPOR

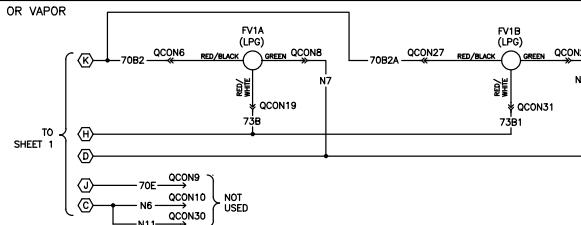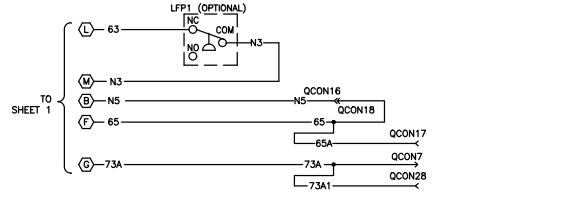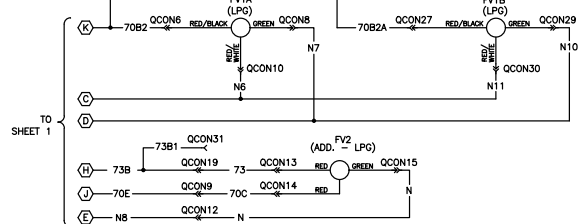
ADDITIONAL FUEL VALVE KIT (OPTION)
(REQUIRED FOR U.L. APPROVAL)

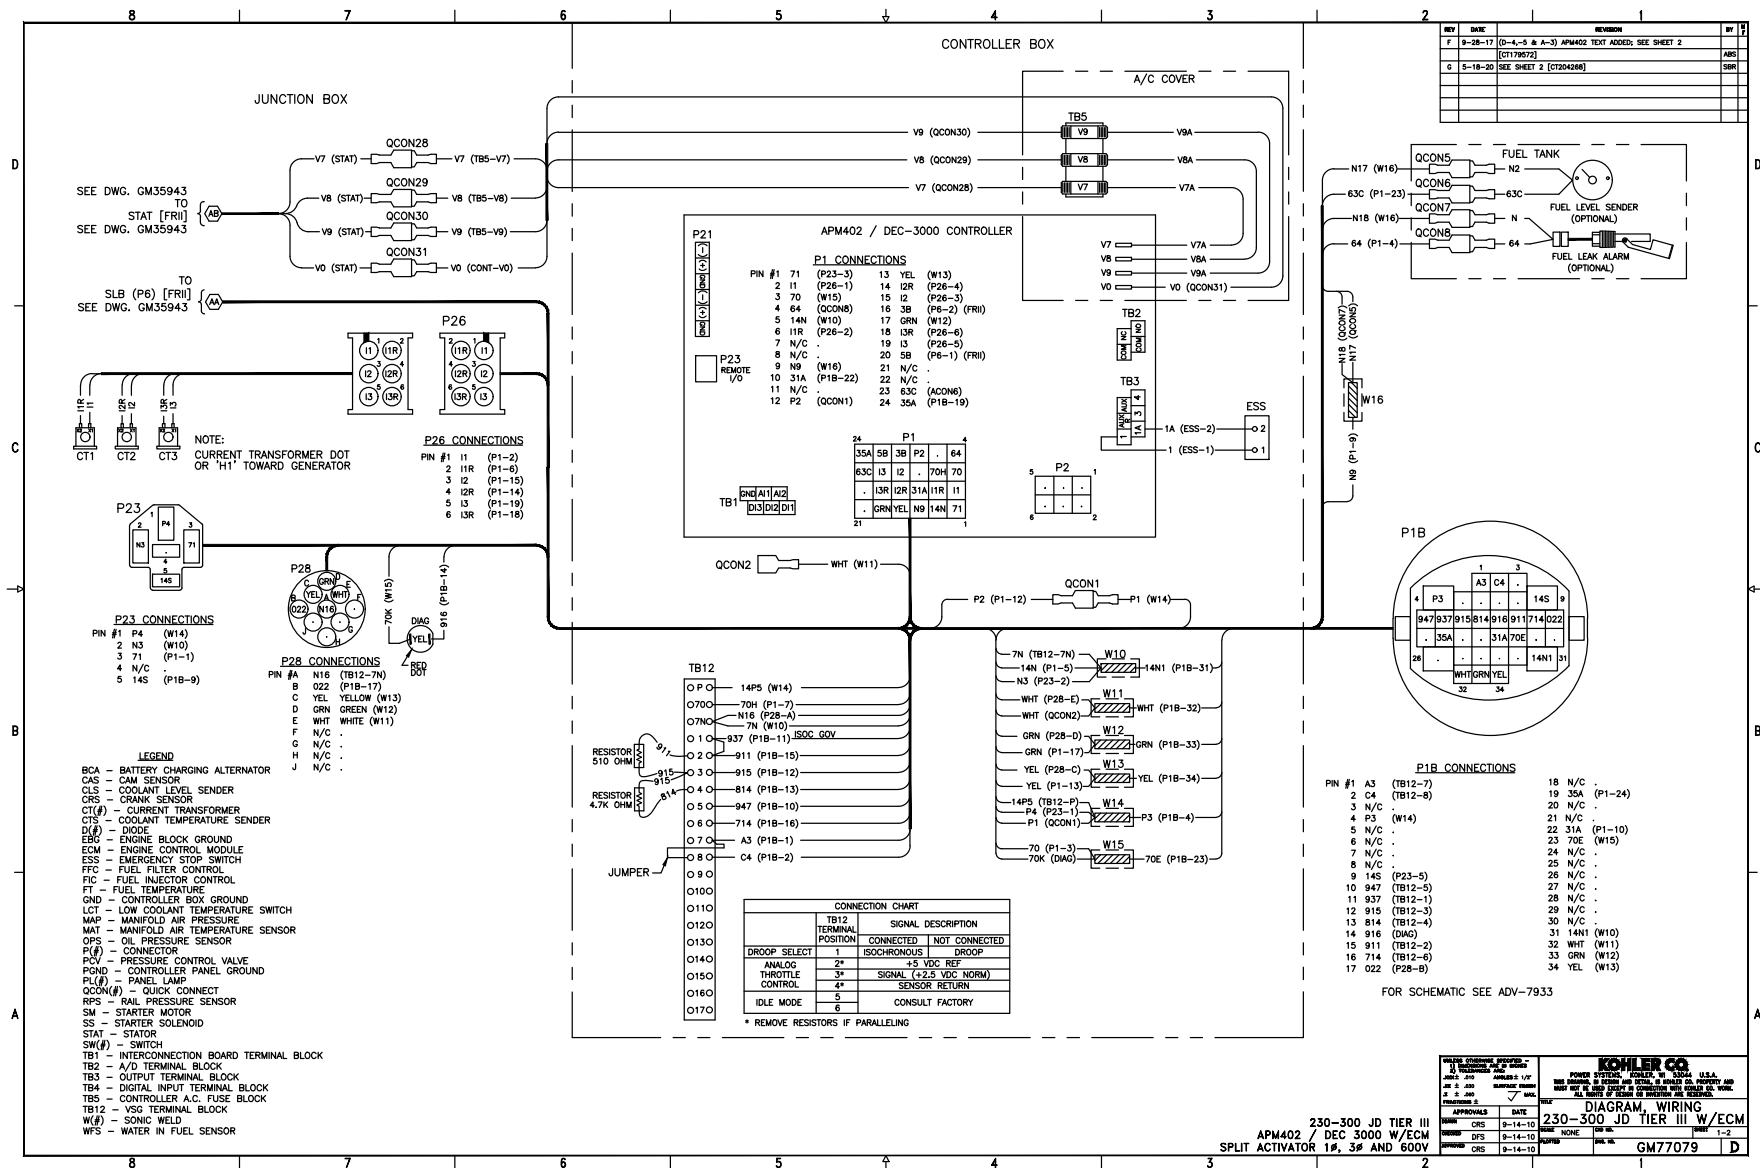

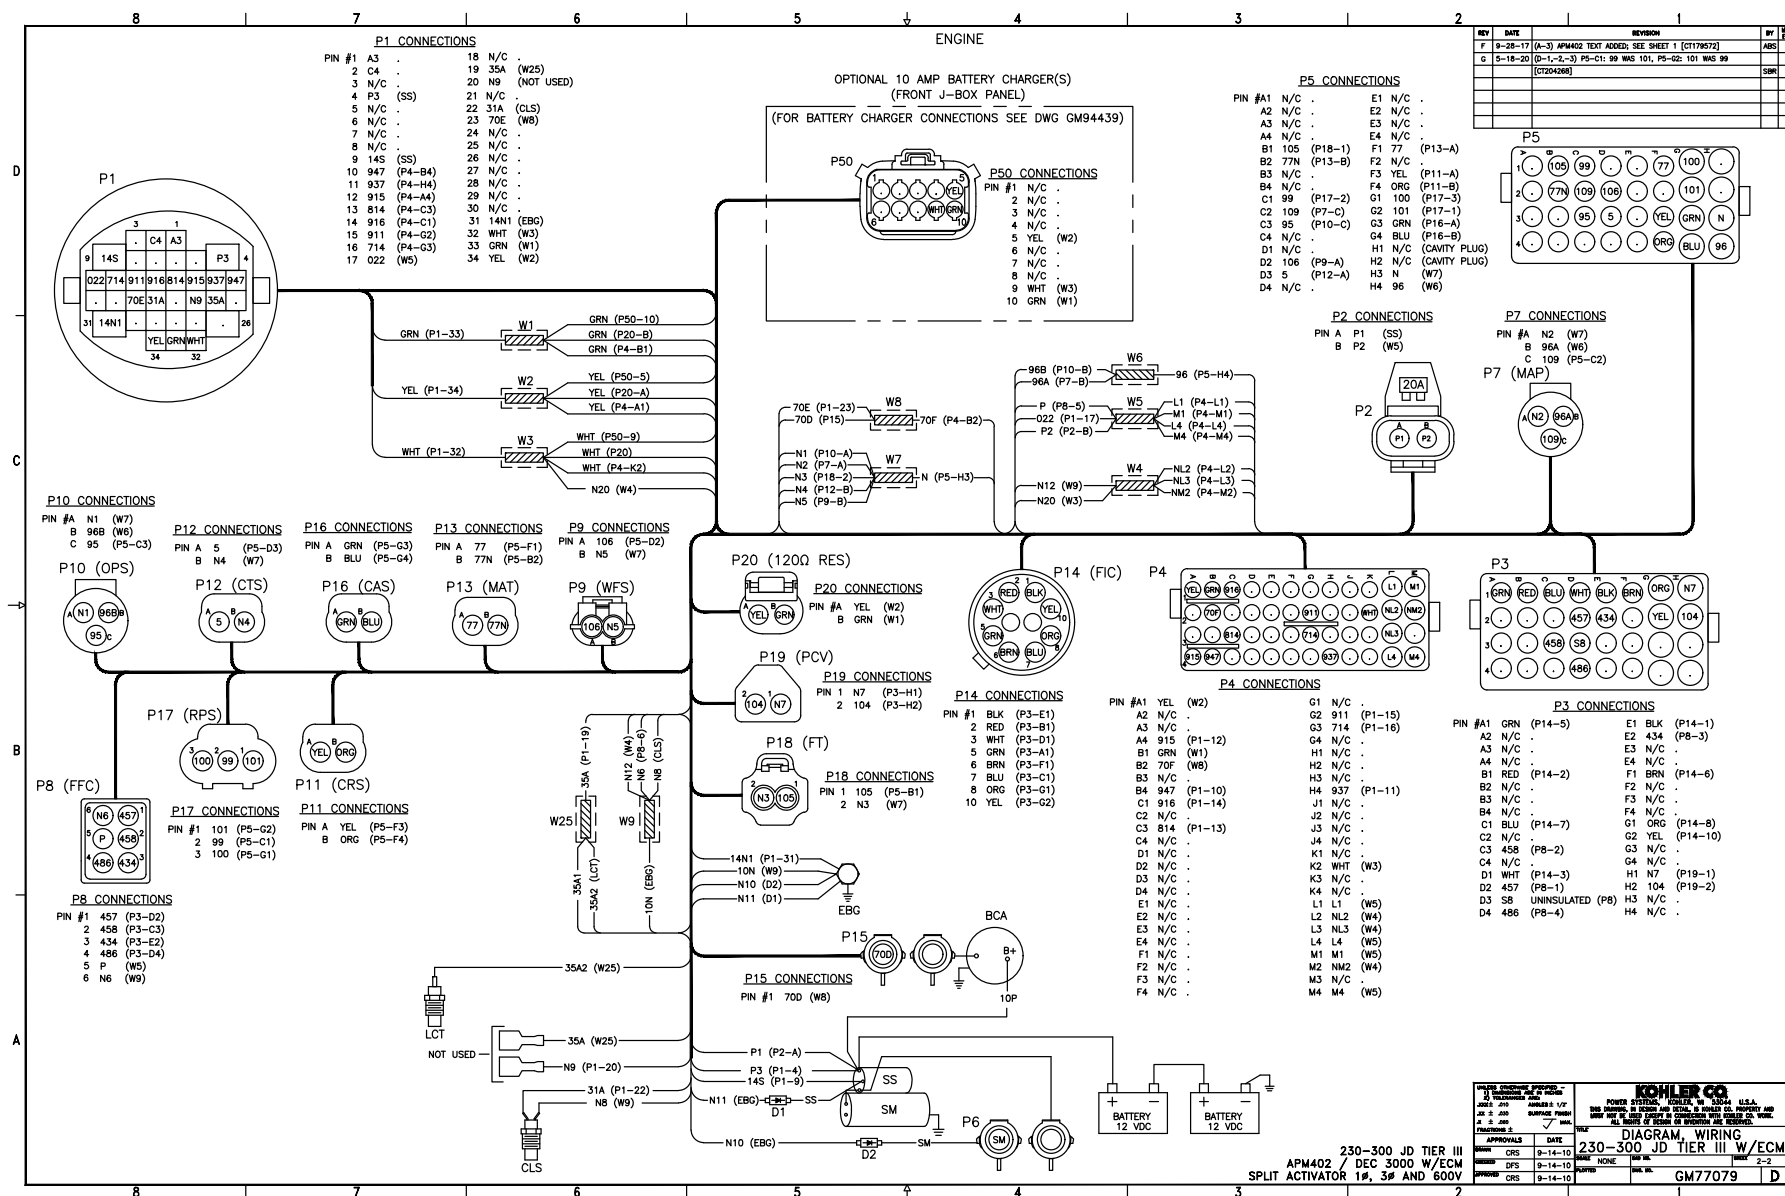

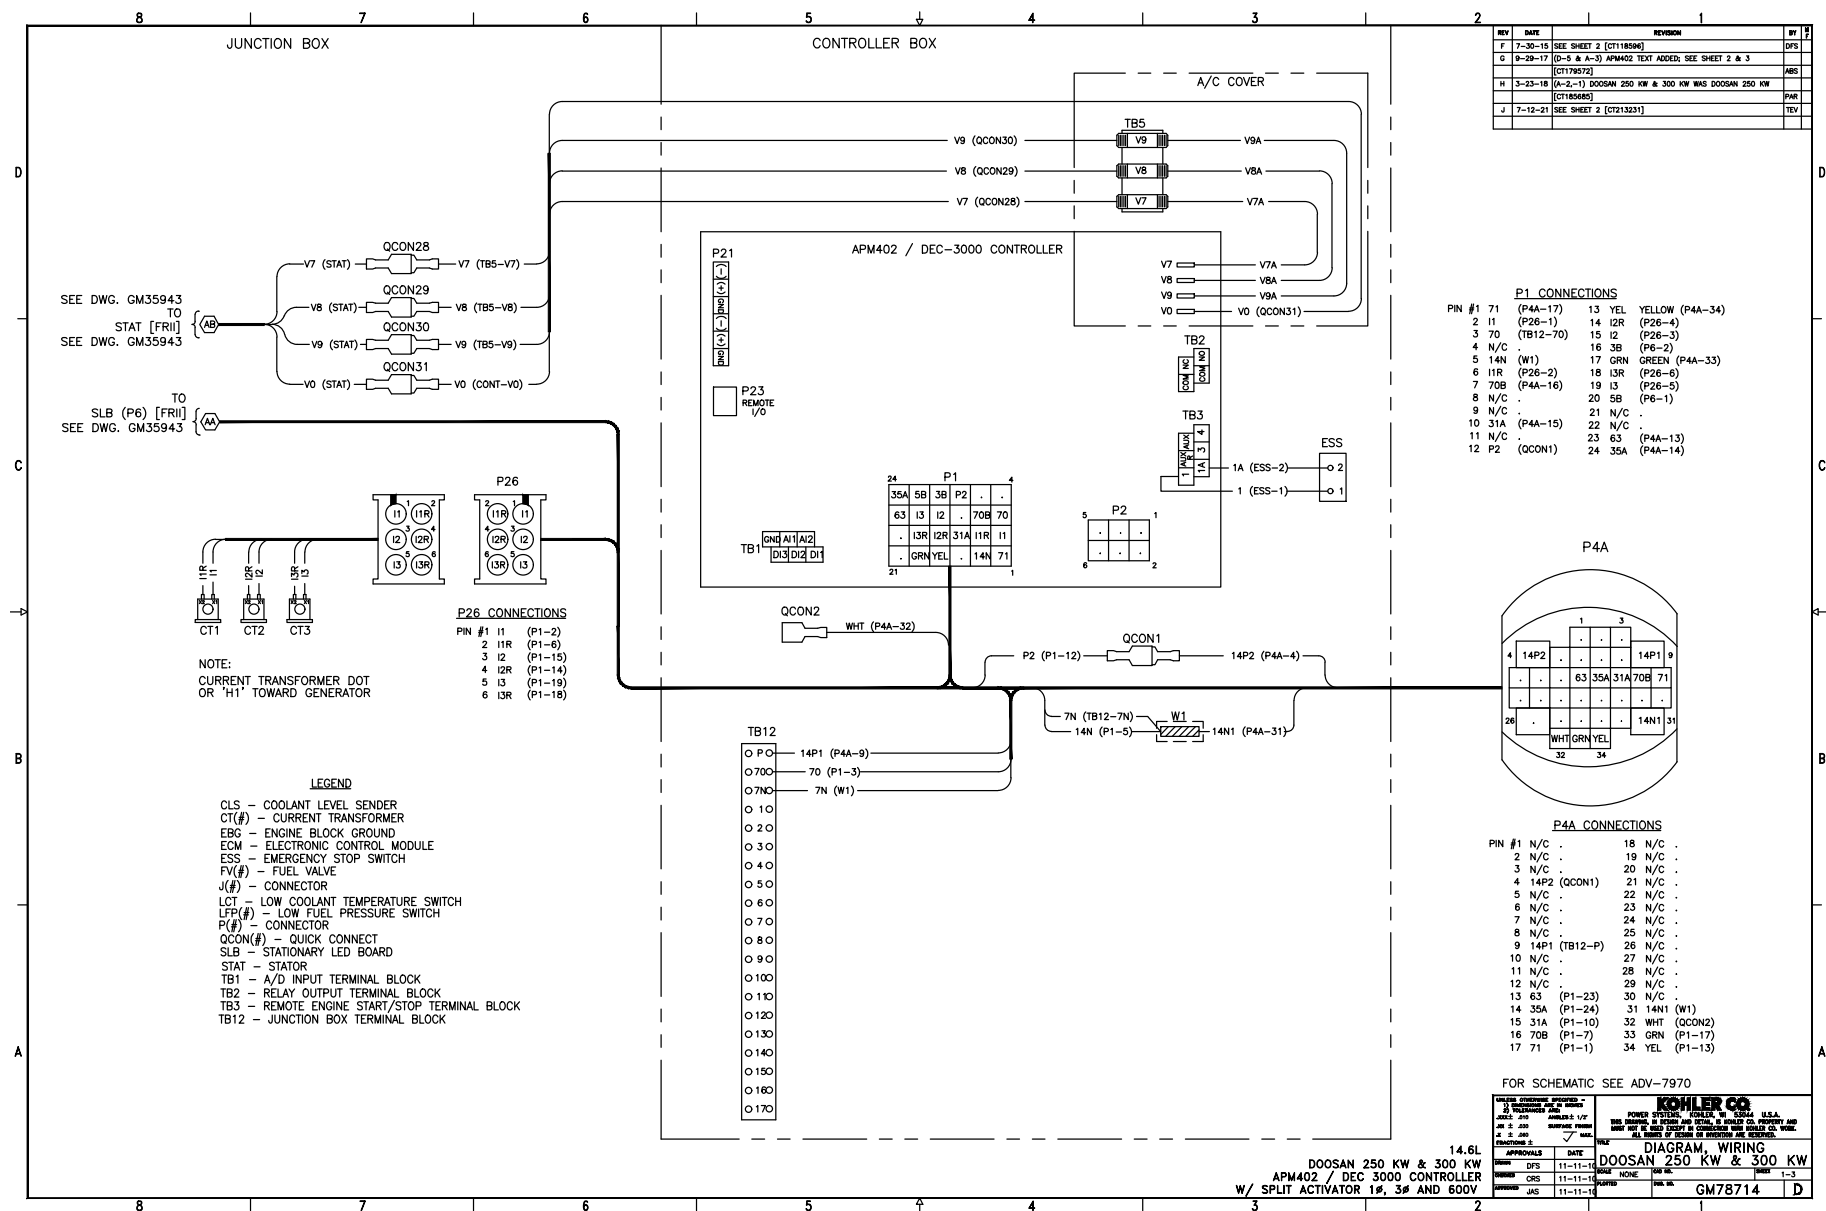


REV	DATE	REVISION	BY
F	7-30-15	(C & D-4) LEAD N20 ADDED BETWEEN W3 & W12; (C-1,-2) P50-6: WHT (W12) WAS N/C [CT118596]	DPS
G	9-29-17	(A-3) APM402 TEXT ADDED; SEE SHEET 1 & 3 [CT1179072]	ABS
H	3-23-17	(A-2,-1) DOOSAN 250 KW & 300 KW WAS DOOSAN 250 KW [CT185685]	PAR
J	7-12-21	(D-4) S2 WAS WHT [CT13231]	TEV



TO SHEET 1


P4 CONNECTIONS

PIN #1	N/C
2	N/C
3	N/C
4	14P2 (W4)
5	N/C
6	N/C
7	N/C
8	N/C
9	14P1 (W4)
10	N/C
11	N/C
12	N/C
13	63 (LFP1-NC)
14	35A (W7)
15	31A (P6-A)
16	70B (W5)
17	71 (P5-F)
18	N/C
19	N/C
20	N/C
21	N/C
22	N/C
23	N/C
24	N/C
25	N/C
26	N/C
27	N/C
28	N/C
29	N/C
30	N/C
31	14N1 (SM-GND)
32	WHT (W12)
33	GRN (W10)
34	YEL (W11)

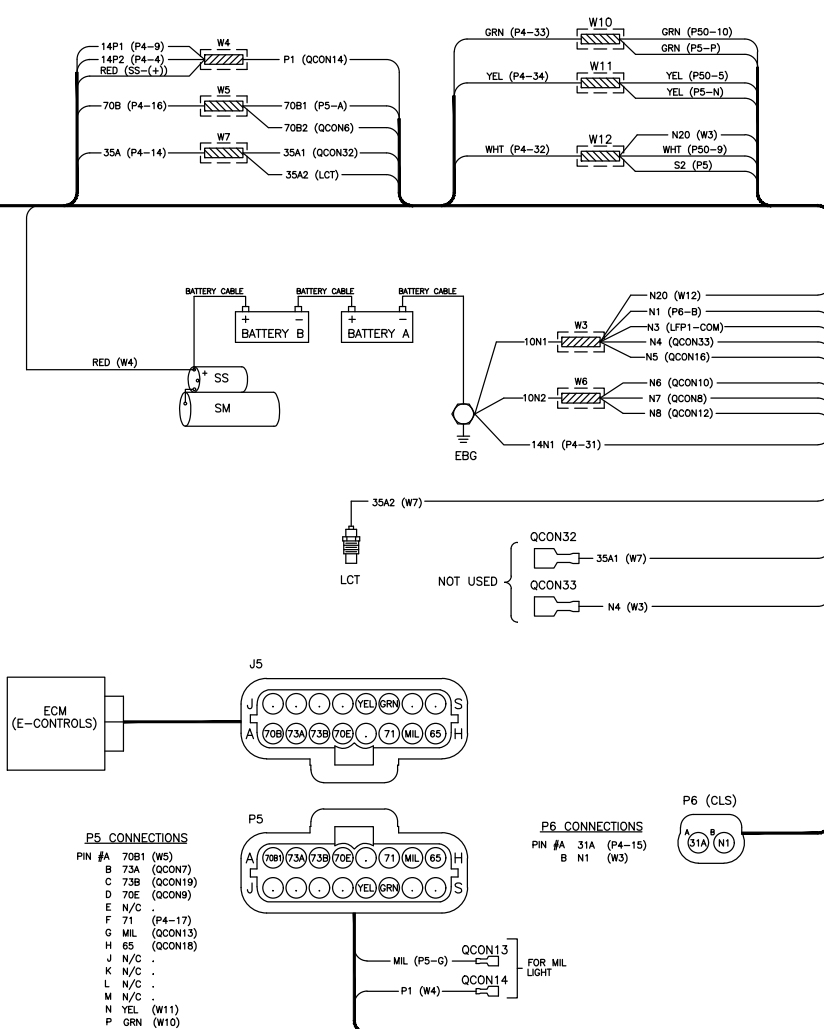

OPTIONAL 10 AMP BATTERY CHARGER(S) (FRONT J-BOX PANEL)

(FOR BATTERY CHARGER CONNECTIONS SEE DWG GM94439)



P50 CONNECTIONS

PIN #1	N/C
2	N/C
3	N/C
4	N/C
5	YEL (W11)
6	N/C
7	N/C
8	N/C
9	WHT (W12)
10	GRN (W10)

P5 CONNECTIONS

PIN #A	70B1 (W5)
B	73A (QCON7)
C	73B (QCON19)
D	70E (QCON9)
E	N/C
F	71 (P4-17)
G	MIL (QCON13)
H	65 (QCON18)
J	N/C
K	N/C
L	N/C
M	N/C
N	YEL (W11)
P	GRN (W10)
R	N/C
S	N/C

P6 CONNECTIONS



PIN #A	31A (P4-15)
B	N1 (W3)

TO FUEL SYSTEMS
SHEET 3

APPROVALS		DATE		BY	
DESIGN	DPS	11-11-11	DATE	DATE	DATE
REVIEW	CRS	11-11-11	DATE	DATE	DATE
APPROVED	JMS	11-11-11	DATE	DATE	DATE


14.6L
DOOSAN 250 KW & 300 KW
APM402 / DEC 3000 CONTROLLER
W / SPLIT ACTIVATOR 1#, 3# AND 600V

KOHLER CO.		POWER SYSTEMS, KENNESAW, GA, U.S.A.	
DOOSAN 250 KW & 300 KW		GM78714	
DATE		DATE	
DATE		DATE	

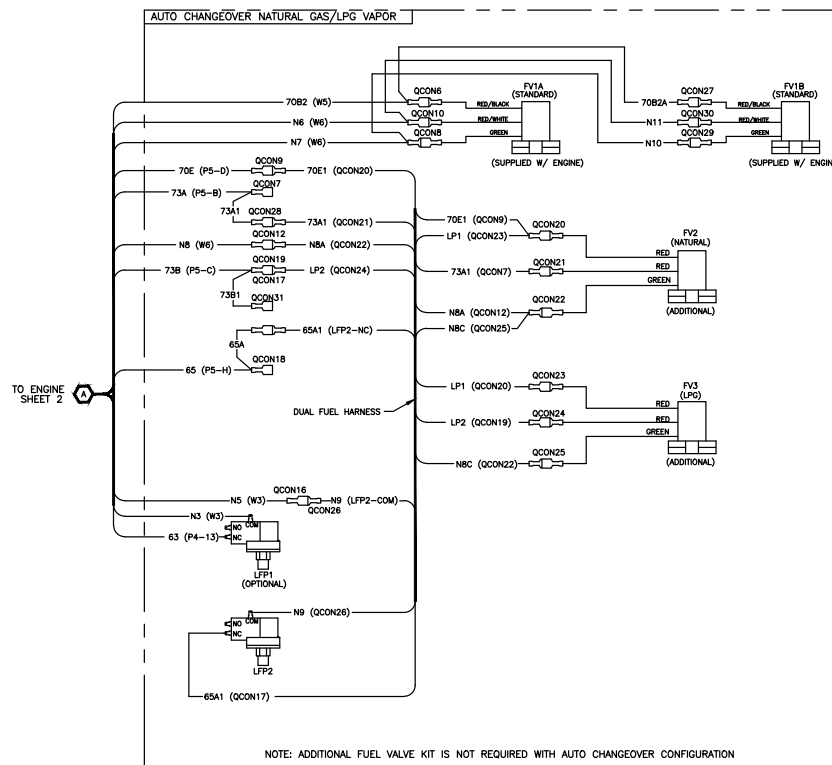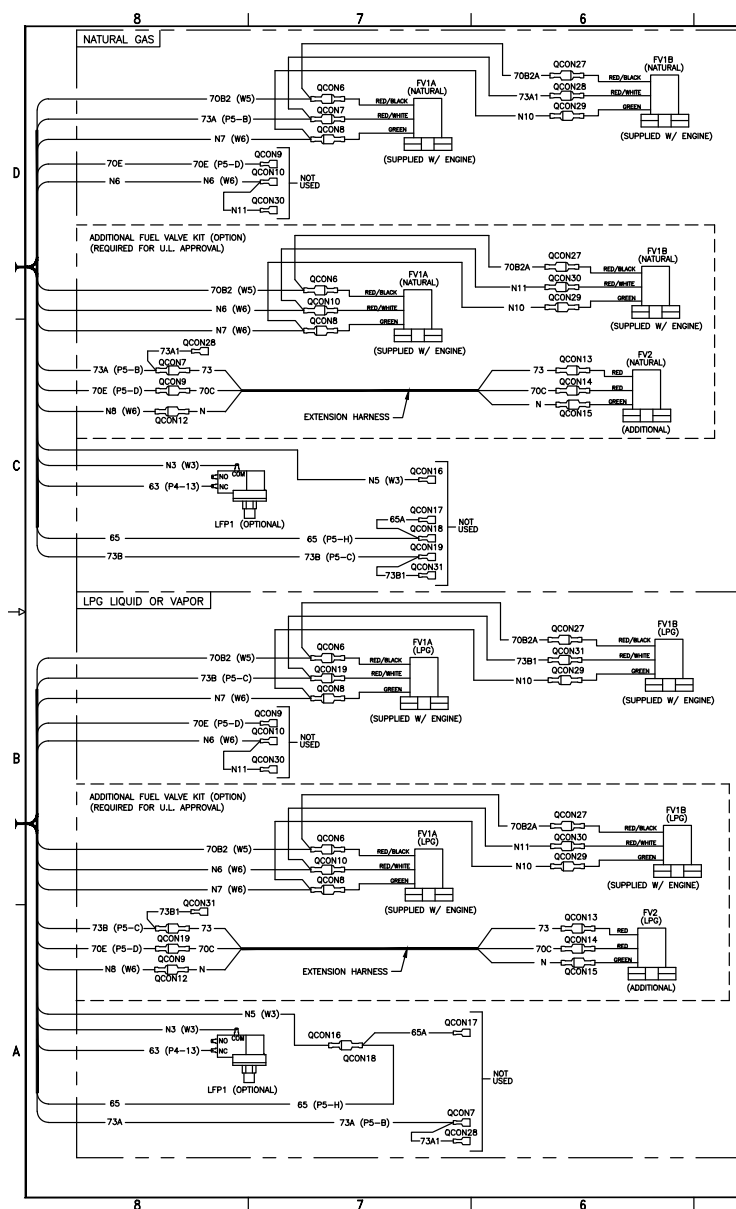



REV	DATE	REVISION	BY
E	10-1-14	SEE SHEET 2 [CT14120]	DPS
F	7-29-15	SEE SHEET 2 [CT118596]	DPS
G	8-29-17	[A-2-1] APM402 TEXT ADDED; SEE SHEET 1 & 2 [CT179572]	MBS
H	3-23-18	[A-2-1] DOOSAN 250 KW & 300 KW WAS DOOSAN 250 KW	PAR
J	7-12-21	SEE SHEET 2 [CT213231]	TEV

DOOSAN 250 KW & 300 KW APM402 / DEC 3000 CONTROLLER W/ SPLIT ACTIVATOR 1#, 3# AND 600V		14.6L DOOSAN 250 KW & 300 KW APM402 / DEC 3000 CONTROLLER W/ SPLIT ACTIVATOR 1#, 3# AND 600V	
APPROVALS	DATE	DIAGRAM, WIRING DOOSAN 250 KW & 300 KW SHEET 3-3 GM78714	
DESIGN	11-11-18		
CHECK	11-11-18		
APPROVED	11-11-18		

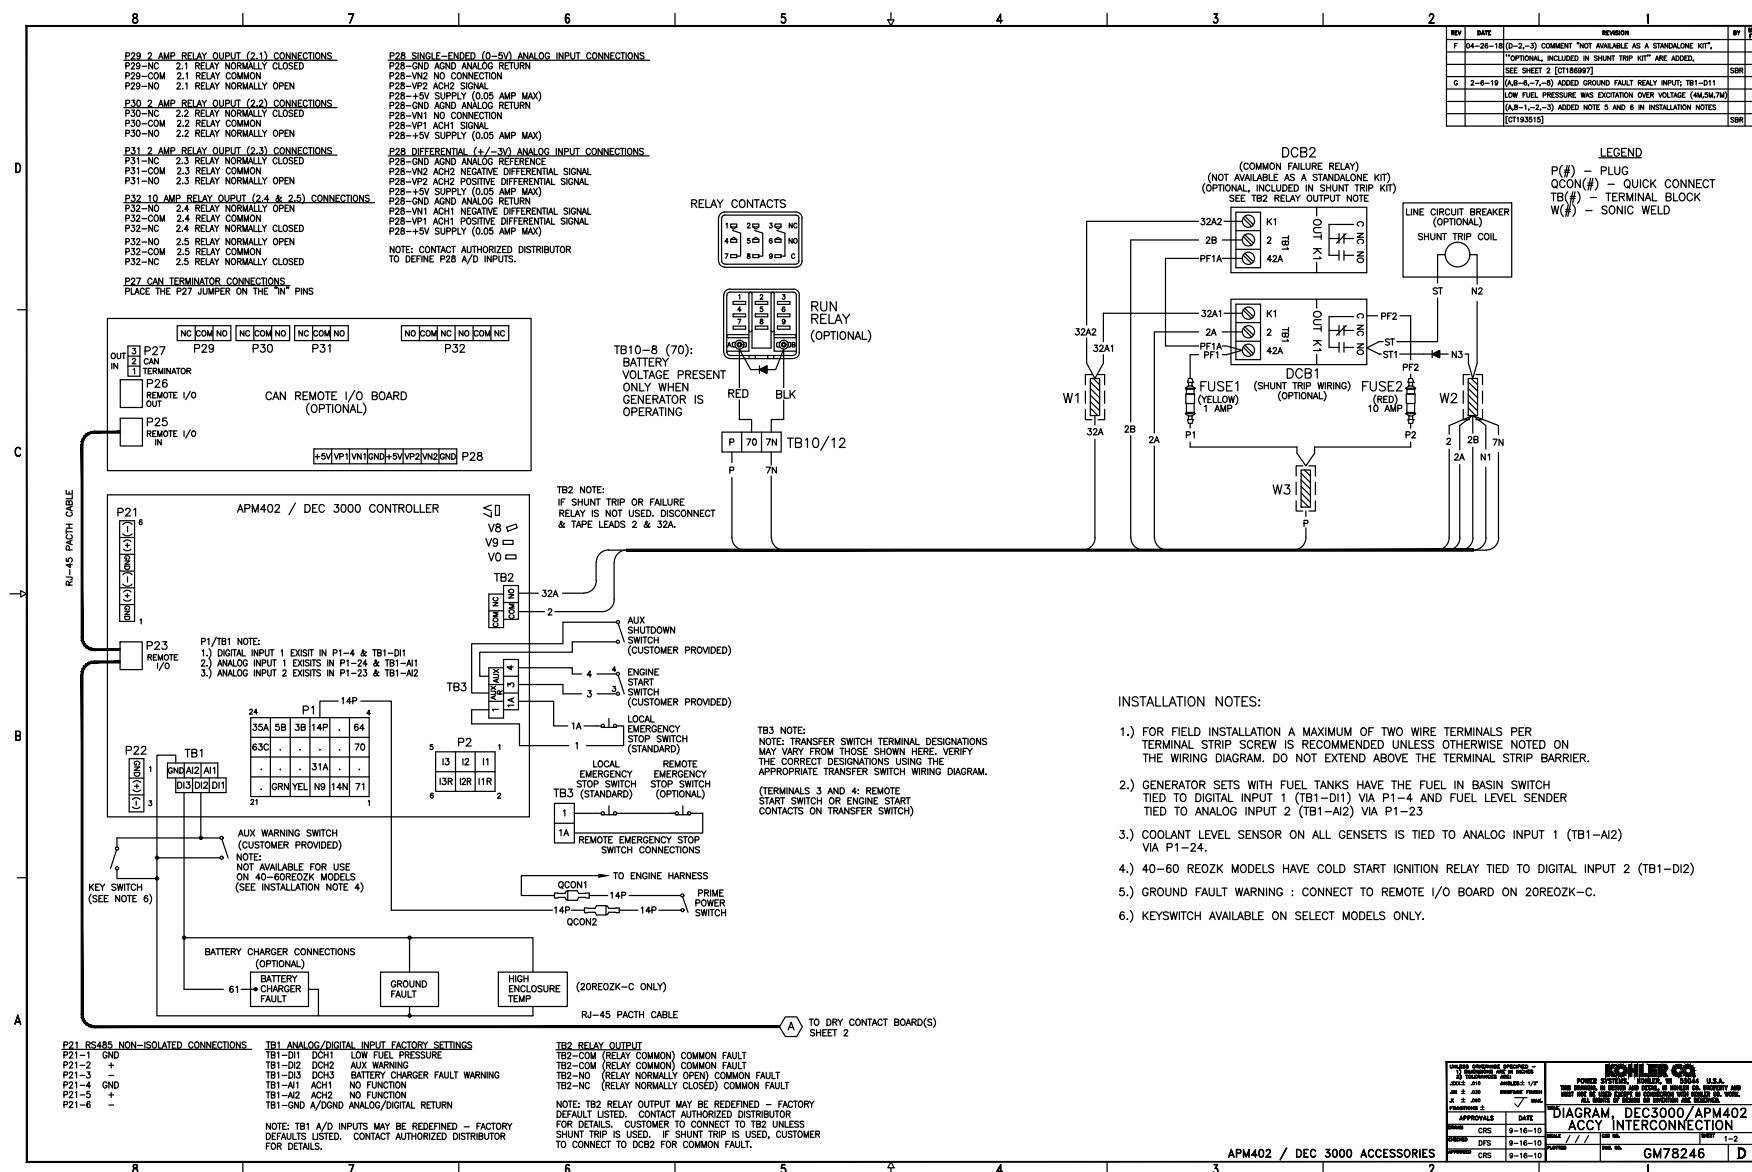


UNLESS OTHERWISE NOTED - ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED		KOHLER CO. POWER SYSTEMS, HONOLULU, HI 96844 U.S.A. THIS SYSTEM, IN BOND AND SHOWN, IS KNOWN AS: HONOLULU AND HONOLULU AND HONOLULU AND HONOLULU AND HONOLULU AND HONOLULU AND HONOLULU AND ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.	
J001 2 010 J002 2 010 J003 2 010 J004 2 010 J005 2 010 J006 2 010 J007 2 010 J008 2 010 J009 2 010 J010 2 010 J011 2 010 J012 2 010 J013 2 010 J014 2 010 J015 2 010 J016 2 010 J017 2 010 J018 2 010 J019 2 010 J020 2 010 J021 2 010 J022 2 010 J023 2 010 J024 2 010 J025 2 010 J026 2 010 J027 2 010 J028 2 010 J029 2 010 J030 2 010 J031 2 010 J032 2 010 J033 2 010 J034 2 010 J035 2 010 J036 2 010 J037 2 010 J038 2 010 J039 2 010 J040 2 010 J041 2 010 J042 2 010 J043 2 010 J044 2 010 J045 2 010 J046 2 010 J047 2 010 J048 2 010 J049 2 010 J050 2 010 J051 2 010 J052 2 010 J053 2 010 J054 2 010 J055 2 010 J056 2 010 J057 2 010 J058 2 010 J059 2 010 J060 2 010 J061 2 010 J062 2 010 J063 2 010 J064 2 010 J065 2 010 J066 2 010 J067 2 010 J068 2 010 J069 2 010 J070 2 010 J071 2 010 J072 2 010 J073 2 010 J074 2 010 J075 2 010 J076 2 010 J077 2 010 J078 2 010 J079 2 010 J080 2 010 J081 2 010 J082 2 010 J083 2 010 J084 2 010 J085 2 010 J086 2 010 J087 2 010 J088 2 010 J089 2 010 J090 2 010 J091 2 010 J092 2 010 J093 2 010 J094 2 010 J095 2 010 J096 2 010 J097 2 010 J098 2 010 J099 2 010 J100 2 010 J101 2 010 J102 2 010 J103 2 010 J104 2 010 J105 2 010 J106 2 010 J107 2 010 J108 2 010 J109 2 010 J110 2 010 J111 2 010 J112 2 010 J113 2 010 J114 2 010 J115 2 010 J116 2 010 J117 2 010 J118 2 010 J119 2 010 J120 2 010 J121 2 010 J122 2 010 J123 2 010 J124 2 010 J125 2 010 J126 2 010 J127 2 010 J128 2 010 J129 2 010 J130 2 010 J131 2 010 J132 2 010 J133 2 010 J134 2 010 J135 2 010 J136 2 010 J137 2 010 J138 2 010 J139 2 010 J140 2 010 J141 2 010 J142 2 010 J143 2 010 J144 2 010 J145 2 010 J146 2 010 J147 2 010 J148 2 010 J149 2 010 J150 2 010 J151 2 010 J152 2 010 J153 2 010 J154 2 010 J155 2 010 J156 2 010 J157 2 010 J158 2 010 J159 2 010 J160 2 010 J161 2 010 J162 2 010 J163 2 010 J164 2 010 J165 2 010 J166 2 010 J167 2 010 J168 2 010 J169 2 010 J170 2 010 J171 2 010 J172 2 010 J173 2 010 J174 2 010 J175 2 010 J176 2 010 J177 2 010 J178 2 010 J179 2 010 J180 2 010 J181 2 010 J182 2 010 J183 2 010 J184 2 010 J185 2 010 J186 2 010 J187 2 010 J188 2 010 J189 2 010 J190 2 010 J191 2 010 J192 2 010 J193 2 010 J194 2 010 J195 2 010 J196 2 010 J197 2 010 J198 2 010 J199 2 010 J200 2 010 J201 2 010 J202 2 010 J203 2 010 J204 2 010 J205 2 010 J206 2 010 J207 2 010 J208 2 010 J209 2 010 J210 2 010 J211 2 010 J212 2 010 J213 2 010 J214 2 010 J215 2 010 J216 2 010 J217 2 010 J218 2 010 J219 2 010 J220 2 010 J221 2 010 J222 2 010 J223 2 010 J224 2 010 J225 2 010 J226 2 010 J227 2 010 J228 2 010 J229 2 010 J230 2 010 J231 2 010 J232 2 010 J233 2 010 J234 2 010 J235 2 010 J236 2 010 J237 2 010 J238 2 010 J239 2 010 J240 2 010 J241 2 010 J242 2 010 J243 2 010 J244 2 010 J245 2 010 J246 2 010 J247 2 010 J248 2 010 J249 2 010 J250 2 010 J251 2 010 J252 2 010 J253 2 010 J254 2 010 J255 2 010 J256 2 010 J257 2 010 J258 2 010 J259 2 010 J260 2 010 J261 2 010 J262 2 010 J263 2 010 J264 2 010 J265 2 010 J266 2 010 J267 2 010 J268 2 010 J269 2 010 J270 2 010 J271 2 010 J272 2 010 J273 2 010 J274 2 010 J275 2 010 J276 2 010 J277 2 010 J278 2 010 J279 2 010 J280 2 010 J281 2 010 J282 2 010 J283 2 010 J284 2 010 J285 2 010 J286 2 010 J287 2 010 J288 2 010 J289 2 010 J290 2 010 J291 2 010 J292 2 010 J293 2 010 J294 2 010 J295 2 010 J296 2 010 J297 2 010 J298 2 010 J299 2 010 J300 2 010 J301 2 010 J302 2 010 J303 2 010 J304 2 010 J305 2 010 J306 2 010 J307 2 010 J308 2 010 J309 2 010 J310 2 010 J311 2 010 J312 2 010 J313 2 010 J314 2 010 J315 2 010 J316 2 010 J317 2 010 J318 2 010 J319 2 010 J320 2 010 J321 2 010 J322 2 010 J323 2 010 J324 2 010 J325 2 010 J326 2 010 J327 2 010 J328 2 010 J329 2 010 J330 2 010 J331 2 010 J332 2 010 J333 2 010 J334 2 010 J335 2 010 J336 2 010 J337 2 010 J338 2 010 J339 2 010 J340 2 010 J341 2 010 J342 2 010 J343 2 010 J344 2 010 J345 2 010 J346 2 010 J347 2 010 J348 2 010 J349 2 010 J350 2 010 J351 2 010 J352 2 010 J353 2 010 J354 2 010 J355 2 010 J356 2 010 J357 2 010 J358 2 010 J359 2 010 J360 2 010 J361 2 010 J362 2 010 J363 2 010 J364 2 010 J365 2 010 J366 2 010 J367 2 010 J368 2 010 J369 2 010 J370 2 010 J371 2 010 J372 2 010 J373 2 010 J374 2 010 J375 2 010 J376 2 010 J377 2 010 J378 2 010 J379 2 010 J380 2 010 J381 2 010 J382 2 010 J383 2 010 J384 2 010 J385 2 010 J386 2 010 J387 2 010 J388 2 010 J389 2 010 J390 2 010 J391 2 010 J392 2 010 J393 2 010 J394 2 010 J395 2 010 J396 2 010 J397 2 010 J398 2 010 J399 2 010 J400 2 010 J401 2 010 J402 2 010 J403 2 010 J404 2 010 J405 2 010 J406 2 010 J407 2 010 J408 2 010 J409 2 010 J410 2 010 J411 2 010 J412 2 010 J413 2 010 J414 2 010 J415 2 010 J416 2 010 J417 2 010 J418 2 010 J419 2 010 J420 2 010 J421 2 010 J422 2 010 J423 2 010 J424 2 010 J425 2 010 J426 2 010 J427 2 010 J428 2 010 J429 2 010 J430 2 010 J431 2 010 J432 2 010 J433 2 010 J434 2 010 J435 2 010 J436 2 010 J437 2 010 J438 2 010 J439 2 010 J440 2 010 J441 2 010 J442 2 010 J443 2 010 J444 2 010 J445 2 010 J446 2 010 J447 2 010 J448 2 010 J449 2 010 J450 2 010 J451 2 010 J452 2 010 J453 2 010 J454 2 010 J455 2 010 J456 2 010 J457 2 010 J458 2 010 J459 2 010 J460 2 010 J461 2 010 J462 2 010 J463 2 010 J464 2 010 J465 2 010 J466 2 010 J467 2 010 J468 2 010 J469 2 010 J470 2 010 J471 2 010 J472 2 010 J473 2 010 J474 2 010 J475 2 010 J476 2 010 J477 2 010 J478 2 010 J479 2 010 J480 2 010 J481 2 010 J482 2 010 J483 2 010 J484 2 010 J485 2 010 J486 2 010 J487 2 010 J488 2 010 J489 2 010 J490 2 010 J491 2 010 J492 2 010 J493 2 010 J494 2 010 J495 2 010 J496 2 010 J497 2 010 J498 2 010 J499 2 010 J500 2 010 J501 2 010 J502 2 010 J503 2 010 J504 2 010 J505 2 010 J506 2 010 J507 2 010 J508 2 010 J509 2 010 J510 2 010 J511 2 010 J512 2 010 J513 2 010 J514 2 010 J515 2 010 J516 2 010 J517 2 010 J518 2 010 J519 2 010 J520 2 010 J521 2 010 J522 2 010 J523 2 010 J524 2 010 J525 2 010 J526 2 010 J527 2 010 J528 2 010 J529 2 010 J530 2 010 J531 2 010 J532 2 010 J533 2 010 J534 2 010 J535 2 010 J536 2 010 J537 2 010 J538 2 010 J539 2 010 J540 2 010 J541 2 010 J542 2 010 J543 2 010 J544 2 010 J545 2 010 J546 2 010 J547 2 010 J548 2 010 J549 2 010 J550 2 010 J551 2 010 J552 2 010 J553 2 010 J554 2 010 J555 2 010 J556 2 010 J557 2 010 J558 2 010 J559 2 010 J560 2 010 J561 2 010 J562 2 010 J563 2 010 J564 2 010 J565 2 010 J566 2 010 J567 2 010 J568 2 010 J569 2 010 J570 2 010 J571 2 010 J572 2 010 J573 2 010 J574 2 010 J575 2 010 J576 2 010 J577 2 010 J578 2 010 J579 2 010 J580 2 010 J581 2 010 J582 2 010 J583 2 010 J584 2 010 J585 2 010 J586 2 010 J587 2 010 J588 2 010 J589 2 010 J590 2 010 J591 2 010 J592 2 010 J593 2 010 J594 2 010 J595 2 010 J596 2 010 J597 2 010 J598 2 010 J599 2 010 J600 2 010 J601 2 010 J602 2 010 J603 2 010 J604 2 010 J605 2 010 J606 2 010 J607 2 010 J608 2 010 J609 2 010 J610 2 010 J611 2 010 J612 2 010 J613 2 010 J614 2 010 J615 2 010 J616 2 010 J617 2 010 J618 2 010 J619 2 010 J620 2 010 J621 2 010 J622 2 010 J623 2 010 J624 2 010 J625 2 010 J626 2 010 J627 2 010 J628 2 010 J629 2 010 J630 2 010 J631 2 010 J632 2 010 J633 2 010 J634 2 010 J635 2 010 J636 2 010 J637 2 010 J638 2 010 J639 2 010 J640 2 010 J641 2 010 J642 2 010 J643 2 010 J644 2 010 J645 2 010 J646 2 010 J647 2 010 J648 2 010 J649 2 010 J650 2 010 J651 2 010 J652 2 010 J653 2 010 J654 2 010 J655 2 010 J656 2 010 J657 2 010 J658 2 010 J659 2 010 J660 2 010 J661 2 010 J662 2 010 J663 2 010 J664 2 010 J665 2 010 J666 2 010 J667 2 010 J668 2 010 J669 2 010 J670 2 010 J671 2 010 J672 2 010 J673 2 010 J674 2 010 J675 2 010 J676 2 010 J677 2 010 J678 2 010 J679 2 010 J680 2 010 J681 2 010 J682 2 010 J683 2 010 J684 2 010 J685 2 010 J686 2 010 J687 2 010 J688 2 010 J689 2 010 J690 2 010 J691 2 010 J692 2 010 J693 2 010 J694 2 010 J695 2 010 J696 2 010 J697 2 010 J698 2 010 J699 2 010 J700 2 010 J701 2 010 J702 2 010 J703 2 010 J704 2 010 J705 2 010 J706 2 010 J707 2 010 J708 2 010 J709 2 010 J710 2 010 J711 2 010 J712 2 010 J713 2 010 J714 2 010 J715 2 010 J716 2 010 J717 2 010 J718 2 010 J719 2 010 J720 2 010 J721 2 010 J722 2 010 J723 2 010 J724 2 010 J725 2 010 J726 2 010 J727 2 010 J728 2 010 J729 2 010 J730 2 010 J731 2 010 J732 2 010 J733 2 010 J734 2 010 J735 2 010 J736 2 010 J737 2 010 J738 2 010 J739 2 010 J740 2 010 J741 2 010 J742 2 010 J743 2 010 J744 2 010 J745 2 010 J746 2 010 J747 2 010 J748 2 010 J749 2 010 J750 2 010 J751 2 010 J752 2 010 J753 2 010 J754 2 010 J755 2 010 J756 2 010 J757 2 010 J758 2 010 J759 2 010 J760 2 010 J761 2 010 J762 2 010 J763 2 010 J764 2 010 J765 2 010 J766 2 010 J767 2 010 J768 2 010 J769 2 010 J770 2 010 J771 2 010 J772 2 010 J773 2 010 J774 2 010 J775 2 010 J776 2 010 J777 2 010 J778 2 010 J779 2 010 J780 2 010 J781 2 010 J782 2 010 J783 2 010 J784 2 010 J785 2 010 J786 2 010 J787 2 010 J788 2 010 J789 2 010 J790 2 010 J791 2 010 J792 2 010 J793 2 010 J794 2 010 J795 2 010 J796 2 010 J797 2 010 J798 2 010 J799 2 010 J800 2 010 J801 2 010 J802 2 010 J803 2 010 J804 2 010 J805 2 010 J806 2 010 J807 2 010 J808 2 010 J809 2 010 J810 2 010 J811 2 010 J812 2 010 J813 2 010 J814 2 010 J815 2 010 J816 2 010 J817 2 010 J818 2 010 J819 2 010 J820 2 010 J821 2 010 J822 2 010 J823 2 010 J824 2 010 J825 2 010 J826 2 010 J827 2 010 J828 2 010 J829 2 010 J830 2 010 J831 2 010 J832 2 010 J833 2 010 J834 2 010 J835 2 010 J836 2 010 J837 2 010 J838 2 010 J839 2 010 J840 2 010 J841 2 010 J842 2 010 J843 2 010 J844 2 010 J845 2 010 J846 2 010 J847 2 010 J848 2 010 J849 2 010 J850 2 010 J851 2 010 J852 2 010 J853 2 010 J854 2 010 J855 2 010 J856 2 010 J857 2 010 J858 2 010 J859 2 010 J860 2 010 J861 2 010 J862 2 010 J863 2 010 J864 2 010 J865 2 010 J866 2 010 J867 2 010 J868 2 010 J869 2 010 J870 2 010 J871 2 010 J872 2 010 J873 2 010 J874 2 010 J875 2 010 J876 2 010 J877 2 010 J878 2 010 J879 2 010 J880 2 010 J881 2 010 J882 2 010 J883 2 010 J884 2 010 J885 2 010 J886 2 010 J887 2 010 J888 2 010 J889 2 010 J890 2 010 J891 2 010 J892 2 010 J893 2 010 J894 2 010 J895 2 010 J896 2 010 J897 2 010 J898 2 010 J899 2 010 J900 2 010 J901 2 010 J902 2 010 J903 2 010 J904 2 010 J905 2 010 J906 2 010 J907 2 010 J908 2 010 J909 2 010 J910 2 010 J911 2 010 J912 2 010 J913 2 010 J914 2 010 J915 2 010 J916 2 010 J917 2 010 J918 2 010 J919 2 010 J920 2 010 J921 2 010 J922 2 010 J923 2 010 J924 2 010 J925 2 010 J926 2 010 J927 2 010 J928 2 010 J929 2 010 J930 2 010 J931 2 010 J932 2 010 J933 2 010 J934 2 010 J935 2 010 J936 2 010 J937 2 010 J938 2 010 J939 2 010 J940 2 010 J941 2 010 J942 2 010 J943 2 010 J944 2 010 J945 2 010 J946 2 010 J947 2 010 J948 2 010 J949 2 010 J950 2 010 J951 2 010 J952 2 010 J953 2 010 J954 2 010 J955 2 010 J956 2 010 J957 2 010 J958 2 010 J959 2 010 J960 2 010 J961 2 010 J962 2 010 J963 2 010 J964 2 010 J965 2 010 J966 2 010 J967 2 010 J968 2 010 J969 2 010 J970 2 010 J971 2 010 J972 2 010 J973 2 010 J974 2 010 J975 2 010 J976 2 010 J977 2 010 J978 2 010 J979 2 010 J980 2 010 J981 2 010 J982 2 010 J983 2 010 J984 2 010 J985 2 010 J986 2 010 J987 2 010 J988 2 010 J989 2 010 J990 2 010 J991 2 010 J992 2 010 J993 2 010 J994 2 010 J995 2 010 J996 2 010 J997 2 010 J998 2 010 J999 2 010 J1000 2 010 J1001 2 010 J1002 2 010 J1003 2 010 J1004 2 010 J1005 2 010 J1006 2 010 J1007 2 010 J1008 2 010 J1009 2 010 J1010 2 010 J1011 2 010 J1012 2 010 J1013 2 010 J1014 2 010 J1			

REV	DATE	REVISION	BY
F	04-26-18	(8-6-2) COMMENT "APM402 / DEC 3000 ACCESSORIES" IS ADDED	SRH
E		SEE SHEET 1 (C1180997)	SRH
D	2-6-19	SEE SHEET 1 (C1183515)	SRH

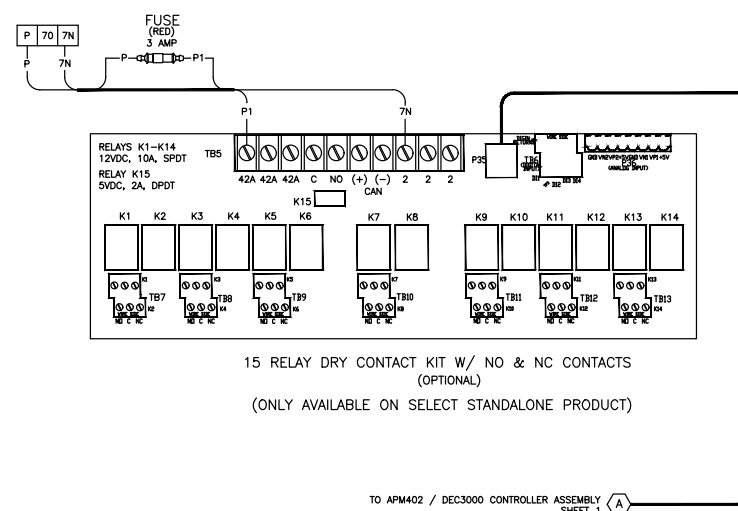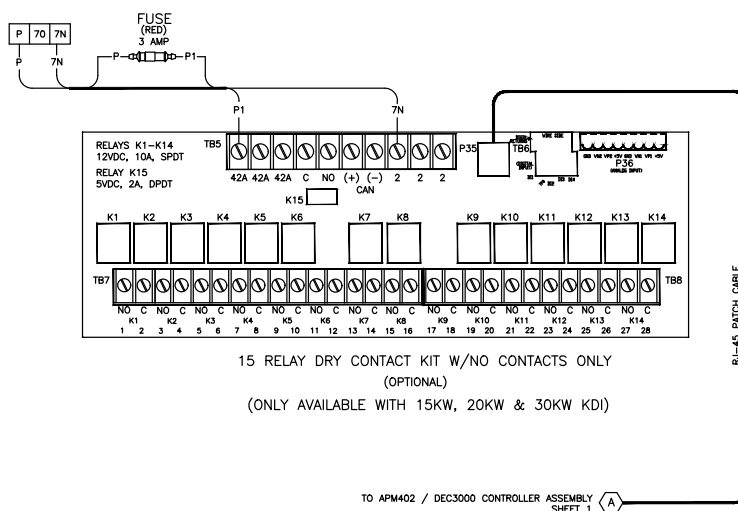

APM402 / DEC 3000 ACCESSORIES

KOHLER CO. POWER SYSTEMS, COOKESVILLE, OHIO, U.S.A. THIS EQUIPMENT IS DESIGNED AND MANUFACTURED TO THE HIGHEST QUALITY STANDARDS AND IS SUBJECT TO THE FOLLOWING CONDITIONS: 1. ALL RIGHTS OF INVENTION ARE RESERVED. 2. NO PARTS MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM KOHLER CO.		DATE: 9-18-15 BY: DFS CHECKED: CRS APPROVED: DFS	DATE: 9-18-15 BY: DFS CHECKED: CRS APPROVED: DFS	DRAWING NO.: GM78246 SHEET: 2-2
--	--	---	---	------------------------------------

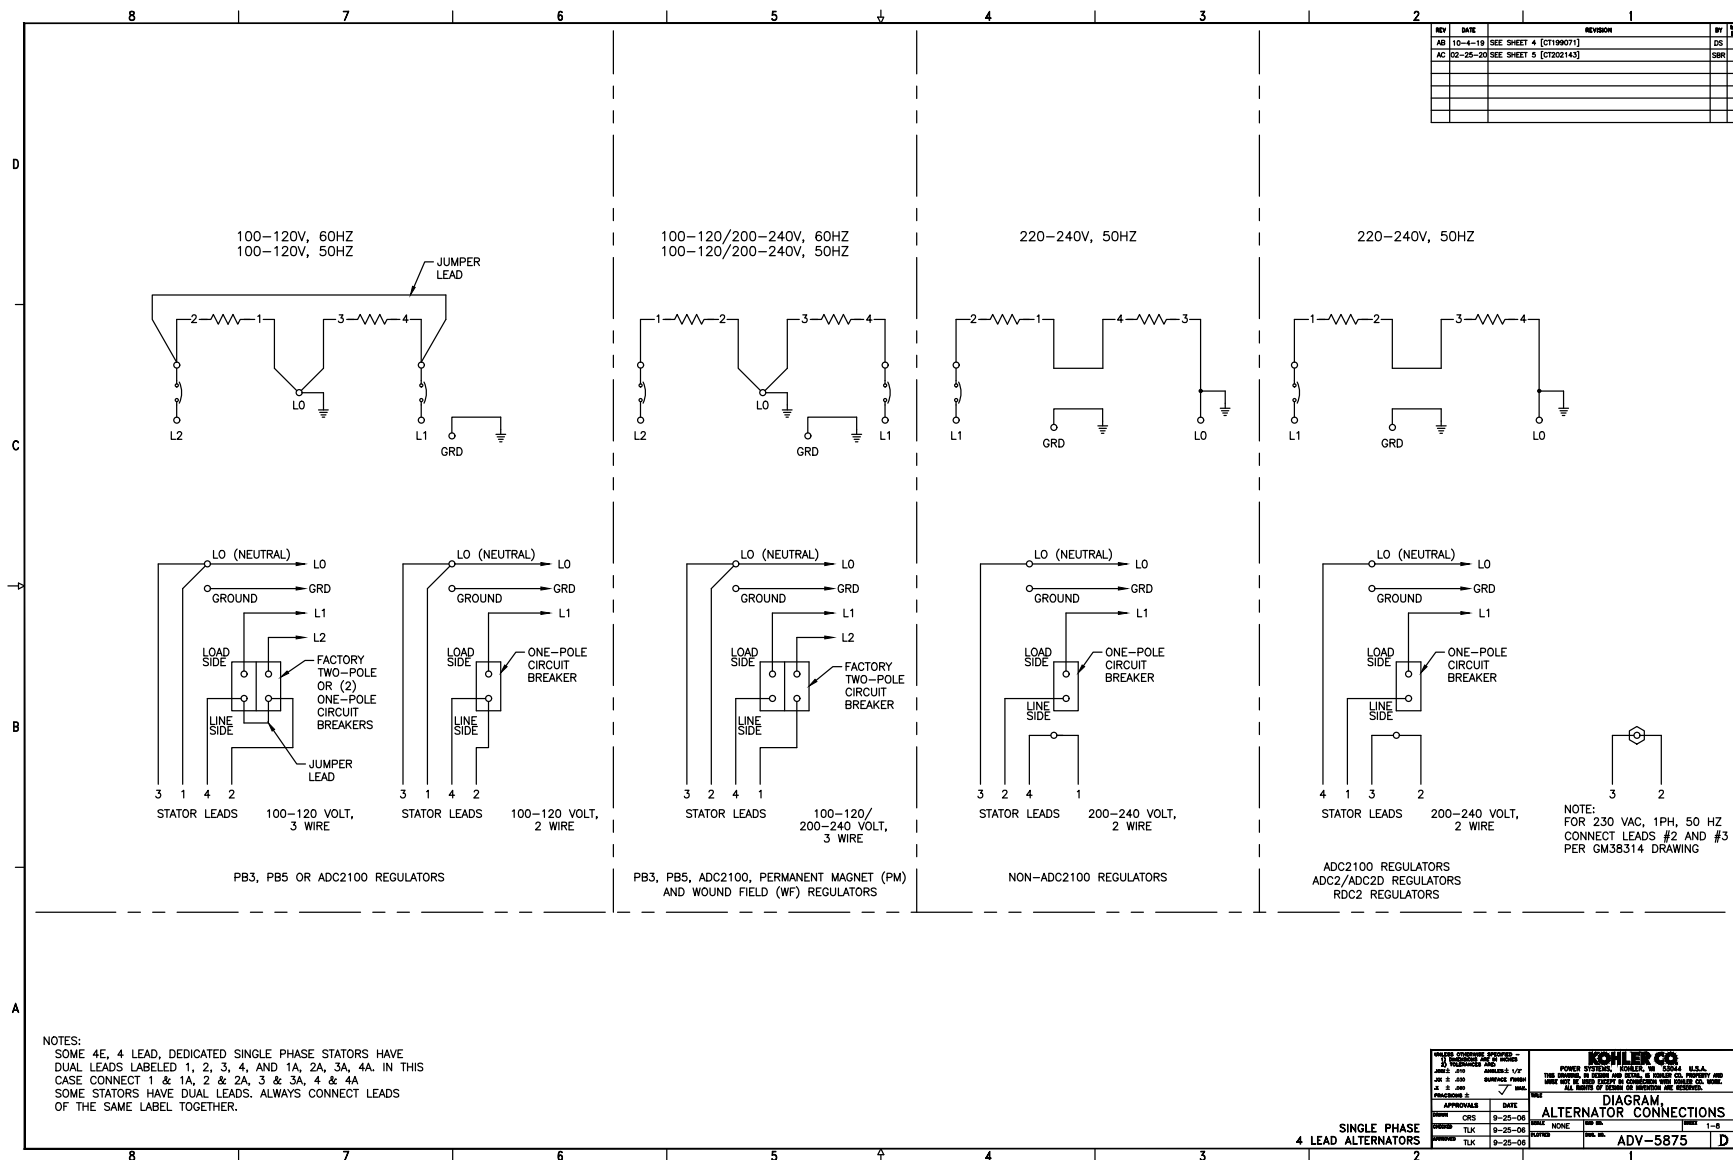

REV	DATE	REVISION	BY
AB	10-4-19	SEE SHEET 4 (CT199071)	DS
AC	02-25-20	SEE SHEET 5 (CT202143)	SR

NOTES:
SOME 4E, 4 LEAD, DEDICATED SINGLE PHASE STATORS HAVE DUAL LEADS LABELED 1, 2, 3, 4, AND 1A, 2A, 3A, 4A. IN THIS CASE CONNECT 1 & 1A, 2 & 2A, 3 & 3A, 4 & 4A. SOME STATORS HAVE DUAL LEADS, ALWAYS CONNECT LEADS OF THE SAME LABEL TOGETHER.

POWER SYSTEMS GROUP

ADV-5875

DATE: 9-25-06

BY: TJK

CHKD: TJK

APPROVED: TJK

DATE: 9-25-06

BY: TJK

CHKD: TJK

APPROVED: TJK

KOHLER CO.

POWER SYSTEMS GROUP, P.O. BOX 1000, SHELBY, OHIO 44675

ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.


DIAGRAM


ALTERNATOR CONNECTIONS

ADV-5875

D


SINGLE PHASE
4 LEAD ALTERNATORS

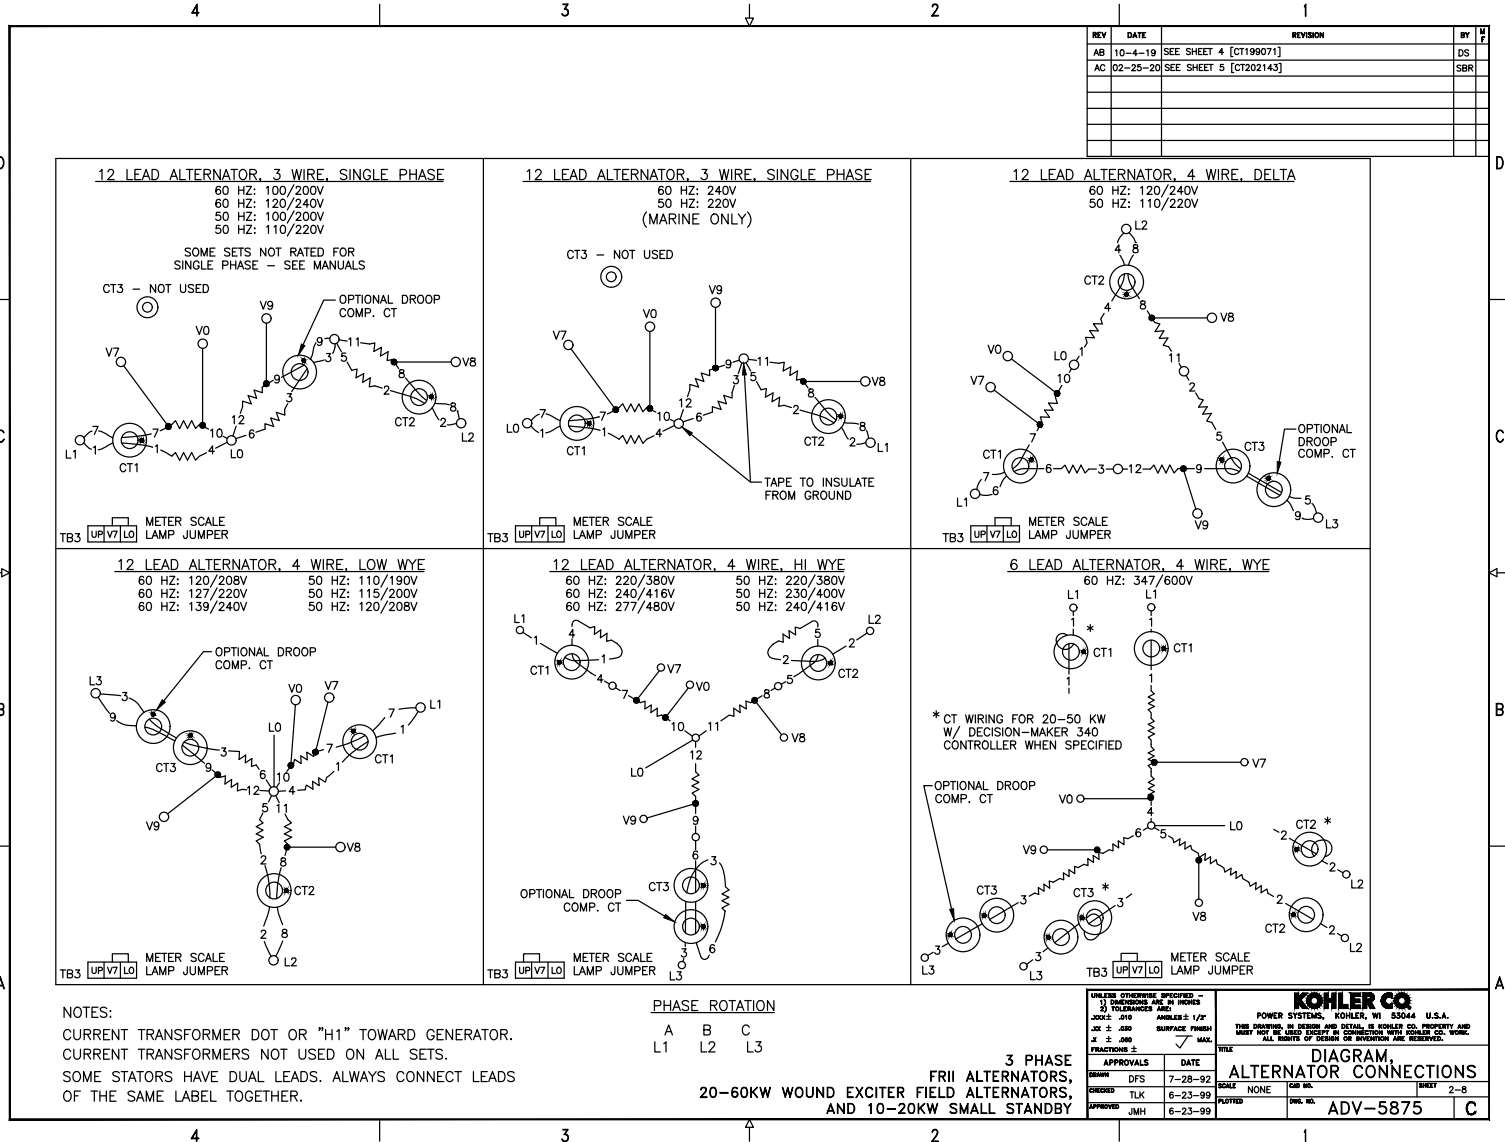

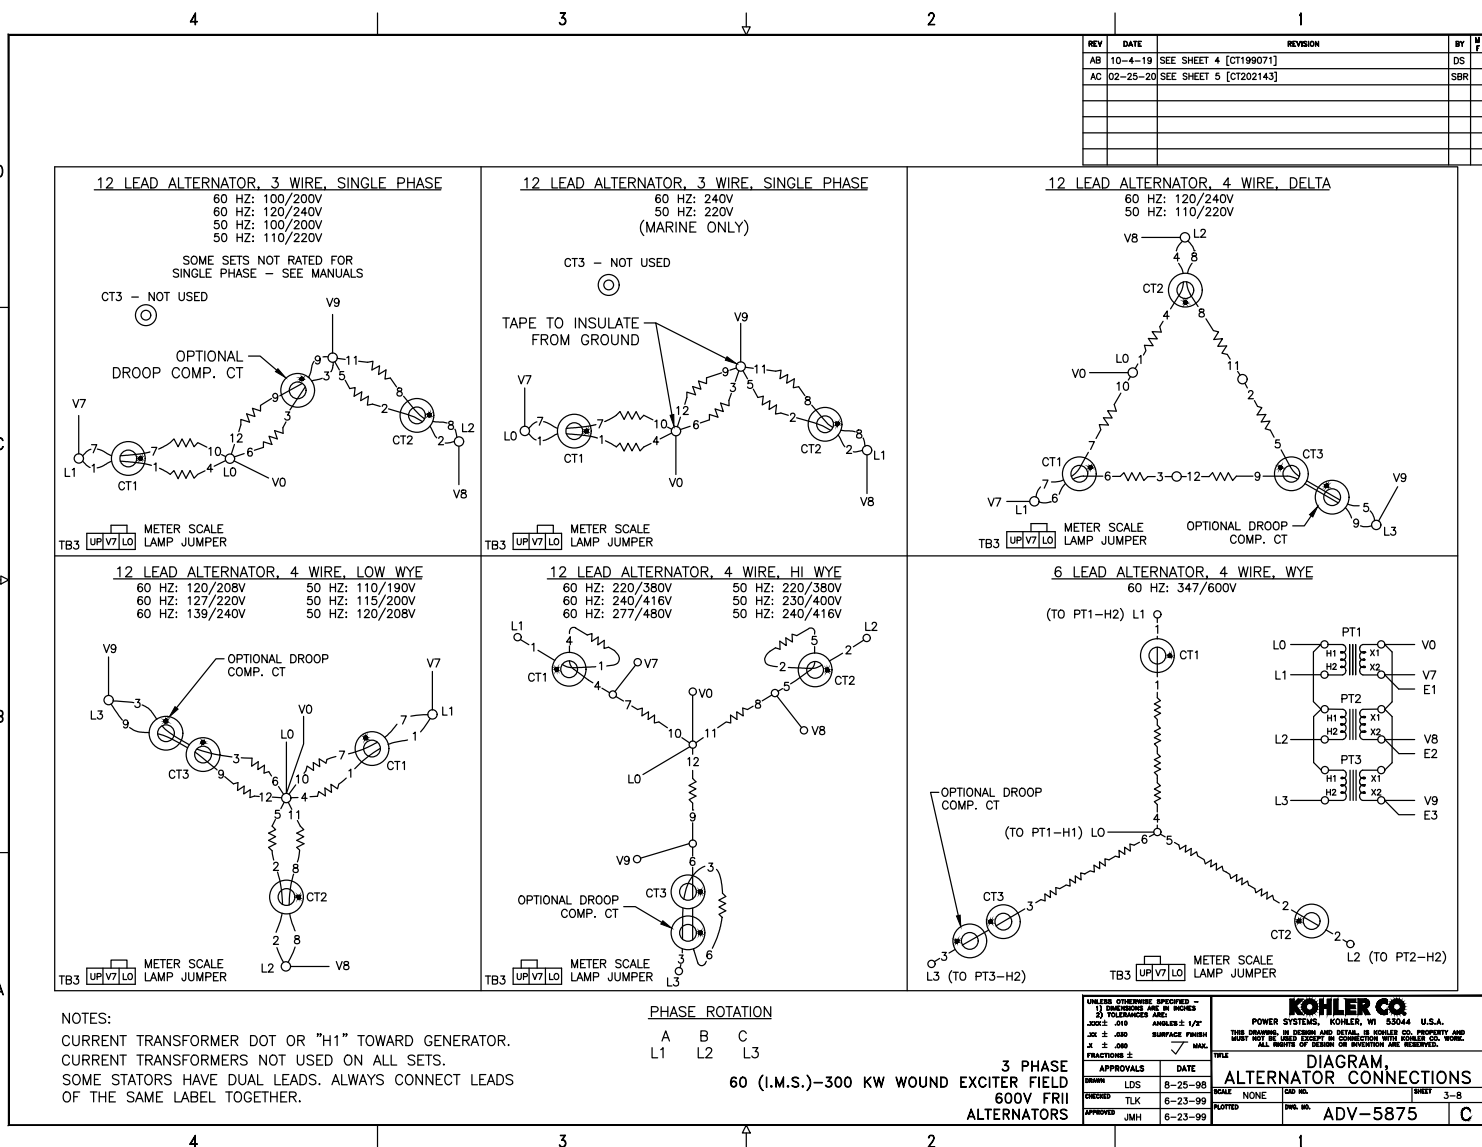


REV	DATE	REVISION	BY	CHK
AB	10-4-19	12 LEAD ALTERNATOR: 3 WIRE, SINGLE PHASE & 4 WIRE, DELTA RECONNECTION DIAGRAM UPDATED [CT190071]	DS	
AC	02-25-20	SEE SHEET 5 [CT2002143]	SBN	

3 PHASE GENERATOR CONNECTIONS

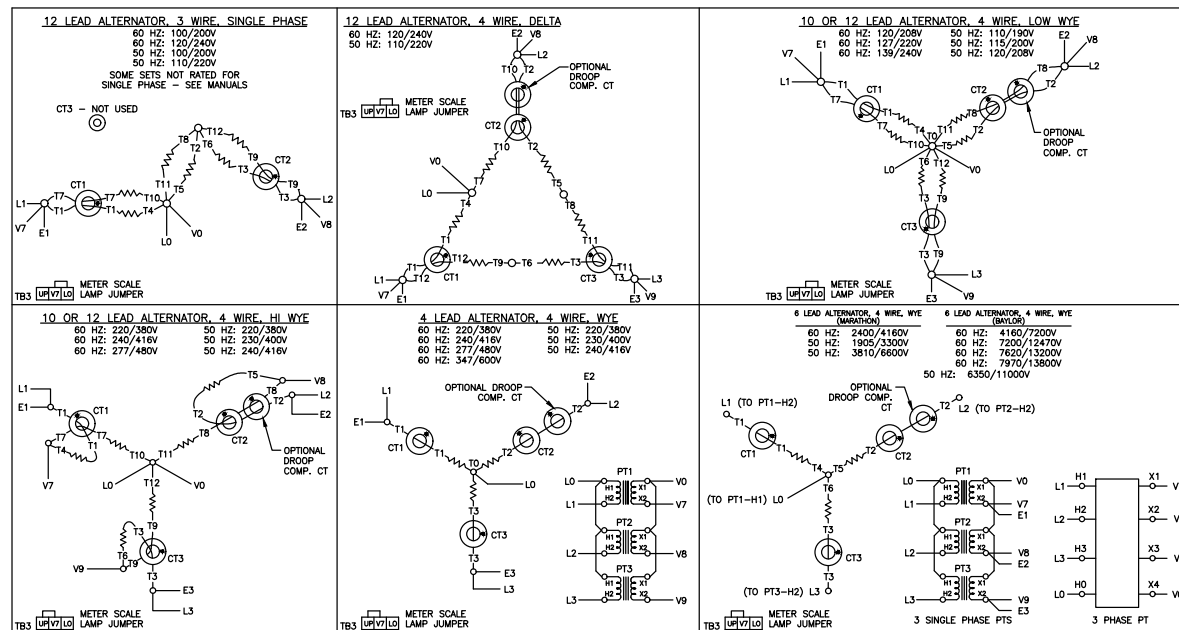

PHASE ROTATION
 A B C
 L1 L2 L3

SINGLE PHASE GENERATOR CONNECTIONS

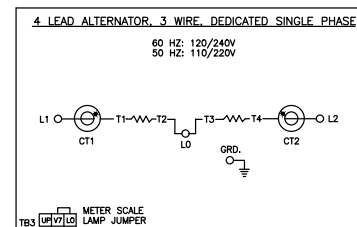

NOTES:


ON 10 LEAD GENERATORS, LEADS T10, T11 & T12 ARE ALL BROUGHT OUT TOGETHER AND LABELED "T0".

CURRENT TRANSFORMER DOT OR "H1" TOWARD GENERATOR. CURRENT TRANSFORMERS NOT USED ON ALL SETS.

SOME STATORS HAVE DUAL LEADS. ALWAYS CONNECT LEADS OF THE SAME LABEL TOGETHER.

KOHLER CO. POWER SYSTEMS DIVISION 1000 KOHLER DRIVE FORT MILLS, SC 29504 U.S.A. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.	
DIAGRAM ALTERNATOR CONNECTIONS	
APPROVALS DESIGNED BY: J.S. CHECKED BY: J.S. DRAWN BY: J.S.	DATE 5-27-04 5-27-04 5-27-04
NONE NONE NONE	NONE NONE NONE
PART 4-8 ADV-5875	







MARATHON ALTERNATORS

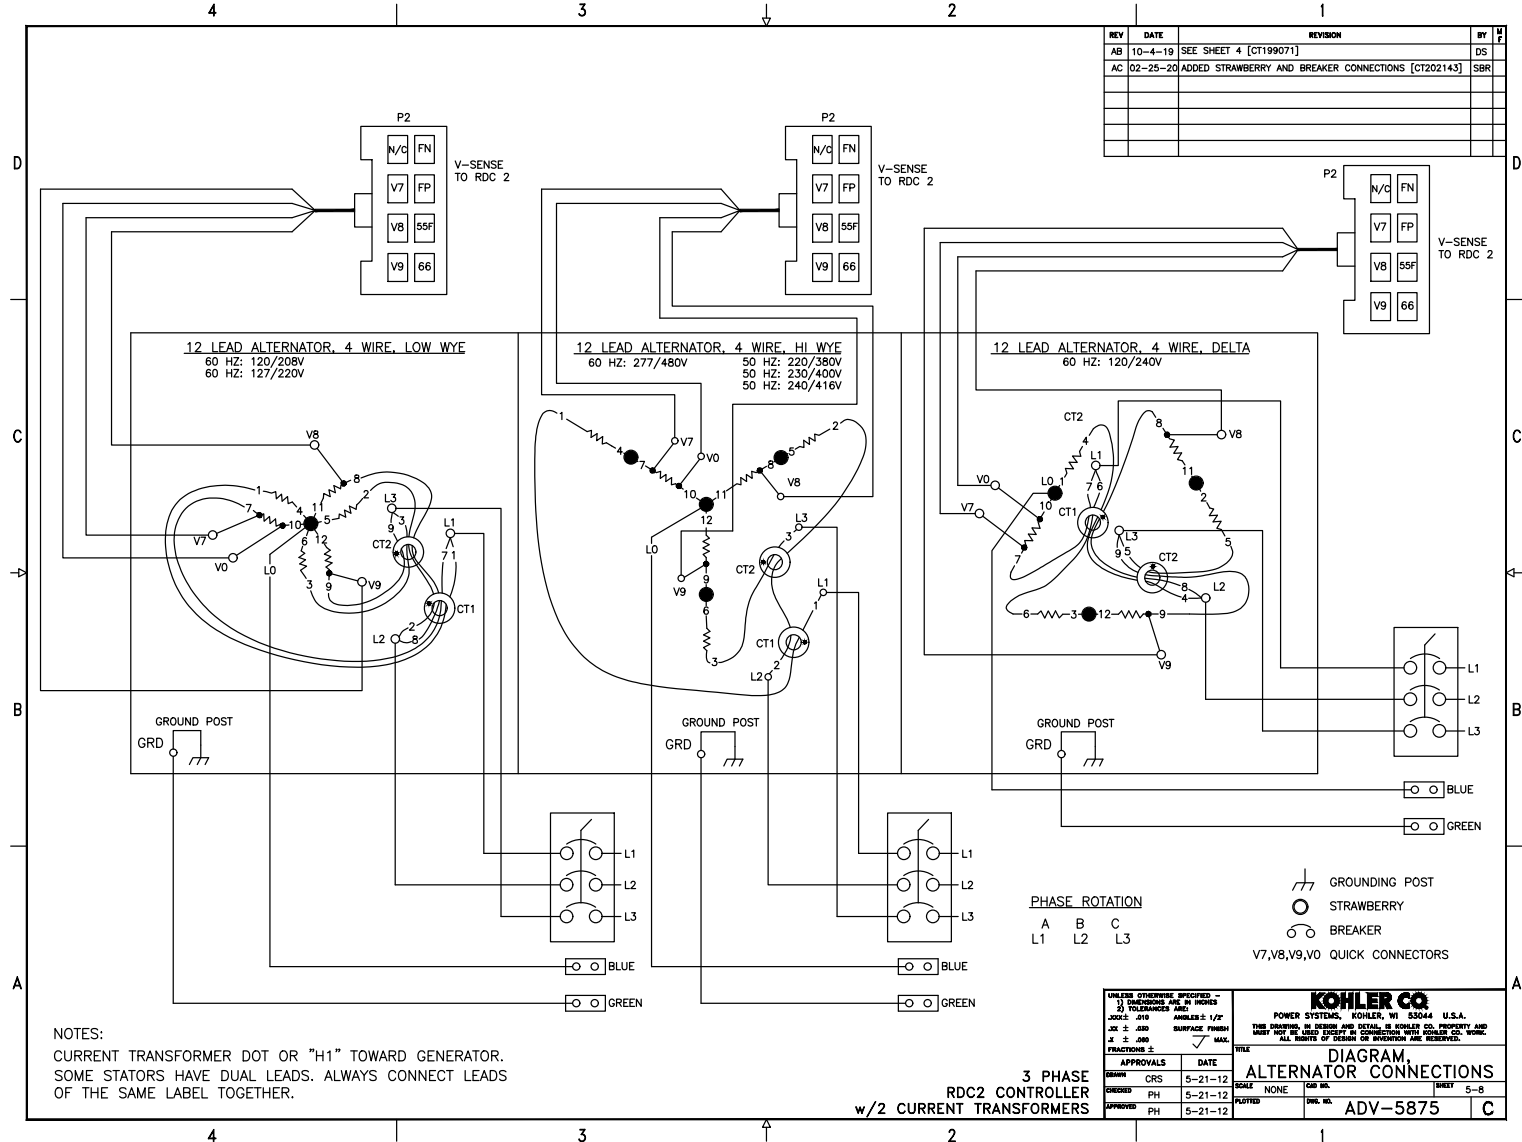

REV	DATE	REVISION	BY	W
AB	10-4-19	SEE SHEET 4 [CT199071]	DS	F
AC	02-25-20	ADDED STRAWBERRY AND BREAKER CONNECTIONS [CT202143]	SBR	

UNLESS OTHERWISE SPECIFIED - 1) DIMENSIONS ARE IN INCHES 2) TOLERANCES ARE: FRACTIONS ± DECIMALS ± ANGLES ± SURFACE FINISH MAX.		KOHLER CO. POWER SYSTEMS, KOHLER, WI 53044 U.S.A. THIS DRAWING IS THE PROPERTY OF KOHLER CO. AND SHALL REMAIN THE PROPERTY OF KOHLER CO. IF USED IN CONNECTION WITH KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.	
APPROVALS		DATE	TITLE
DESIGN	CRS	5-21-12	SCALE NONE
CHECKED	PH	5-21-12	DRW. NO. ADV-5875
APPROVED	PH	5-21-12	SHEET 5-8

REV	DATE	REVISION	BY
AB	10-4-10	SEE SHEET 4 (CT190071)	DS
AC	02-20-20	SEE SHEET 5 (CT202143)	SR

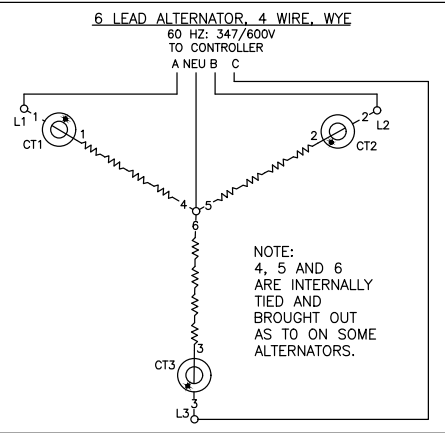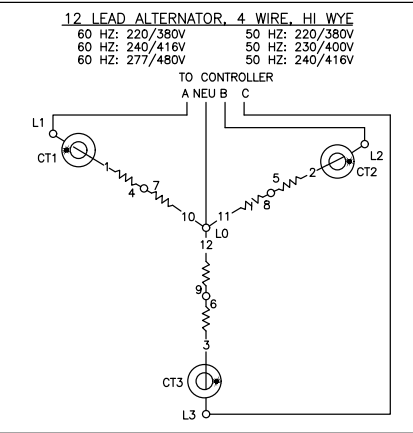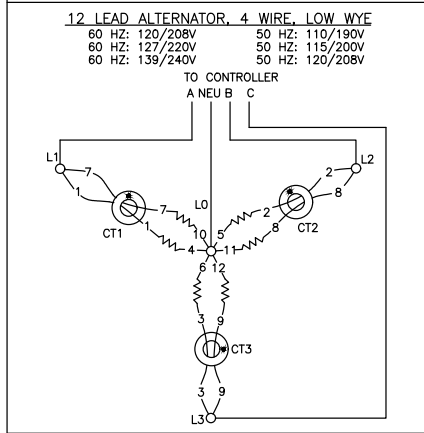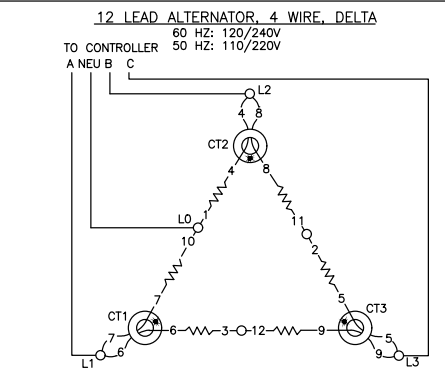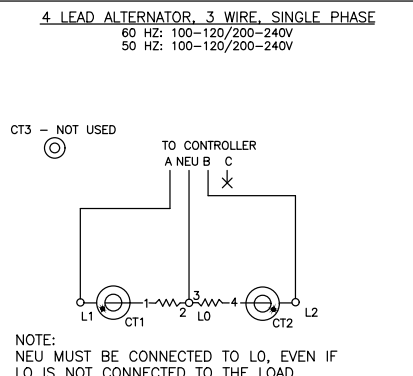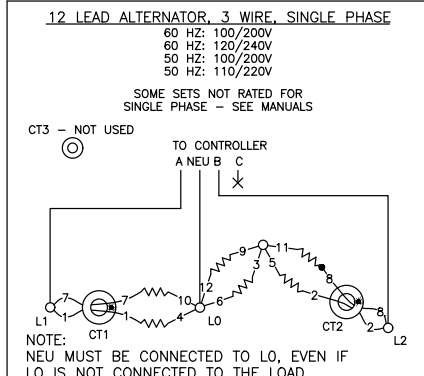

PHASE ROTATION

A B C
 L1 L2 L3

NOTES:
 CURRENT TRANSFORMER DOT OR "H1" TOWARD GENERATOR.
 CURRENT TRANSFORMERS NOT USED ON ALL SETS.
 SOME STATORS HAVE DUAL LEADS. ALWAYS CONNECT LEADS OF THE SAME LABEL TOGETHER.

APM603 CONTROLLER
 DEC3500 CONTROLLER

KOHLER CO.
 POWER SYSTEMS - TOLLEDO, OH, U.S.A.
 THIS PRODUCT IS COVERED BY PATENT, A TRADE OR SERVICE MARK OF KOHLER CO. OR ITS AFFILIATES.
 ALL RIGHTS OF INVENTION ARE RESERVED.


DIAGRAM:
 ALTERNATOR CONNECTIONS

ADV-5875

APPROVALS	DATE
DESIGN	5-27-04
ENGINEER	5-27-04
INSPECTOR	5-27-04

8 7 6 5 4 3 2 1

REV	DATE	REVISION	BY
AD	10-4-10	SEE SHEET 4 (CT190071)	DJS
AC	02-20-20	SEE SHEET 5 (CT002143)	SRH

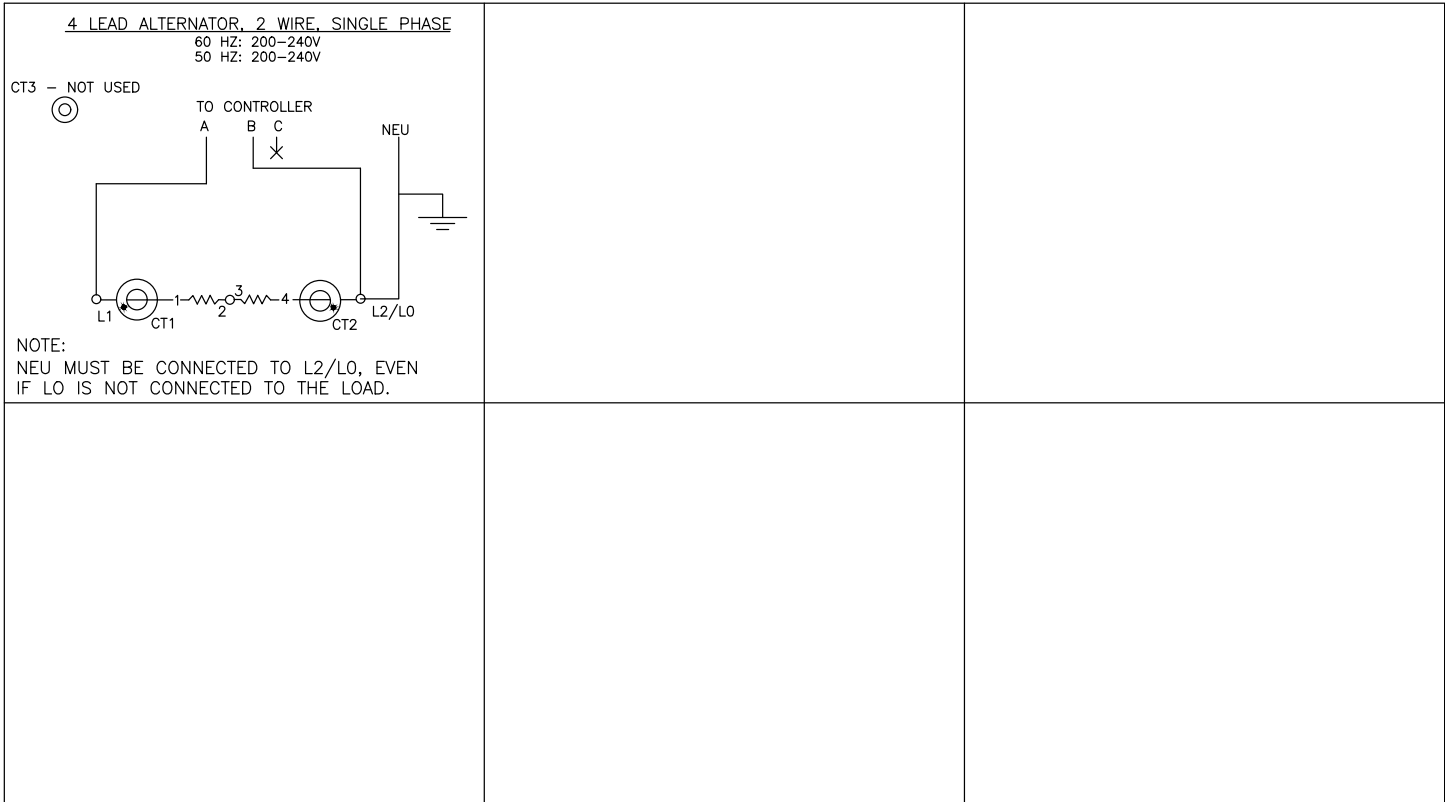

NOTES:

CURRENT TRANSFORMER DOT OR "H1" TOWARD GENERATOR.
CURRENT TRANSFORMERS NOT USED ON ALL SETS.
SOME STATORS HAVE DUAL LEADS. ALWAYS CONNECT LEADS
OF THE SAME LABEL TOGETHER.

PHASE ROTATION




A B C
L1 L2 L3

APM603 CONTROLLER
DEC3500 CONTROLLER

KOHLER CO. POWER SYSTEMS - TOLL FREE 1-800-4-A-ALTERNATOR 1000 WEST 100TH AVENUE, SUITE 100, DENVER, CO 80231-1000 WWW.KOHLER.COM			
DIAGRAM: ALTERNATOR CONNECTIONS			
APPROVALS	DATE	DATE	DATE
DESIGN	5-27-04	DATE	5-27-04
REVIEW	5-27-04	DATE	5-27-04
APPROVED	5-27-04	DATE	5-27-04
ADV-5875		D	

8 7 6 5 4 3 2 1

REV	DATE	REVISION	BY
1	10-14-10	SEE SHEET 4 (CT199071)	DS
2	02-25-20	SEE SHEET 5 (CT202143)	DS

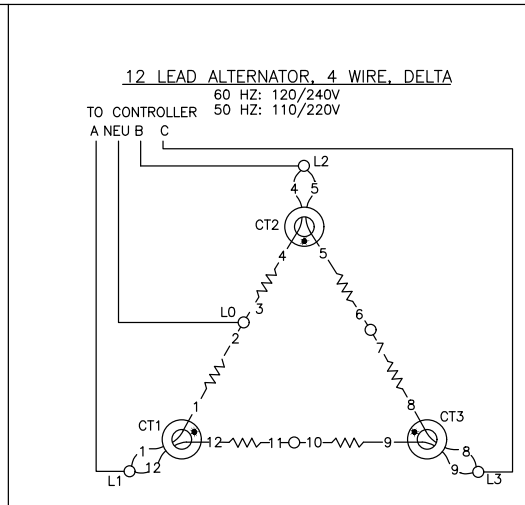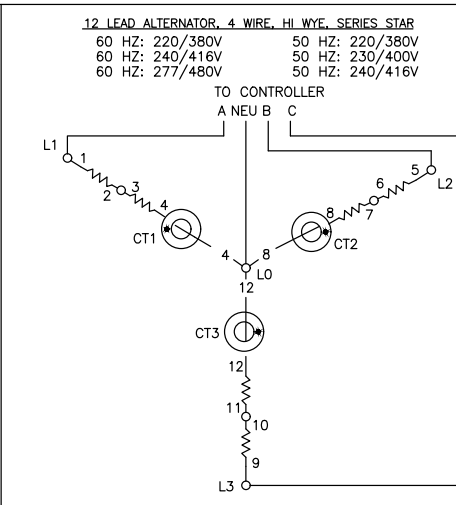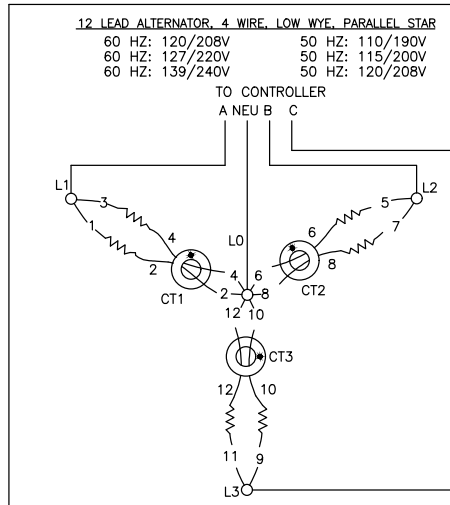

NOTES:
CURRENT TRANSFORMER DOT OR "H1" TOWARD GENERATOR.
CURRENT TRANSFORMERS NOT USED ON ALL SETS.
SOME STATORS HAVE DUAL LEADS. ALWAYS CONNECT LEADS
OF THE SAME LABEL TOGETHER.

PHASE ROTATION

A B C
L1 L2 L3

APM802 CONTROLLER
DEC3500 CONTROLLER
MECC ALTE ALTERNATOR

APPROVALS				DATE			
DESIGNED	BY	DATE	5-27-04	CHECKED	BY	DATE	5-27-04
DRAWN	BY	DATE	5-27-04	APPROVED	BY	DATE	5-27-04
REVIEWED	BY	DATE	5-27-04				

KOHLER CO.
POWER SYSTEMS - TOLLEDO, OH, U.S.A.
THIS PRODUCT IS COVERED BY PATENT, A TRADE SECRET AND
OTHER RIGHTS. ALL RIGHTS OF INVENTION ARE RESERVED.

DIAGRAM:
ALTERNATOR CONNECTIONS
ADV-5875



Miscellaneous

PART NO.		REV	SAE DIMENSION			VOLTAGE	COLD CRANKING AMPS AT 0°F MINIMUM	RESERVE CAP. MINUTES AT 80°F MINIMUM	POST LAYOUT /STYLE	CHARGE TYPE	BATTERY CONSTRUCTION	BCI GROUP	INTERNAL RESISTANCE (MΩ)
			L	W	H								
244578	BF		333.5 [13.13]	181.1 [7.13]	238.5 [9.39]	6	700	275	B/1	DRY	SEE NOTE 1		-
244750	BD		342.9 [13.50]	173.2 [6.82]	238.3 [9.38]	12	600	165	D/1	DRY	SEE NOTE 1		-
239102	DK		198.1 [7.80]	133.4 [5.25]	187.5 [7.38]	12	200	32	D/2	DRY	SEE NOTE 1		-
289515	DC		539.8 [21.25]	282.7 [11.13]	276.4 [10.88]	12	1150	450	A/1	DRY	SEE NOTE 1		-
291918	DC		333.2 [13.12]	173.0 [6.81]	239.8 [9.44]	12	700	150	C/3	WET	SEE NOTE 1		-
299981	DD		333.2 [13.12]	173.0 [6.81]	239.8 [9.44]	12	700	150	C/3	DRY	SEE NOTE 1		-
254425	DD		333.2 [13.12]	173.0 [6.81]	239.8 [9.44]	12	1000	200	C/3	WET	SEE NOTE 1		-
299982	DC		333.2 [13.12]	173.0 [6.81]	239.8 [9.44]	12	950	200	C/3	DRY	SEE NOTE 1		-
324367	BM		268.8 [10.59]	179.4 [7.06]	196.9 [7.75]	12	675	90	C/1	WET	SEE NOTE 1		-
324368	DC		266.5 [10.51]	166.9 [6.57]	205.2 [8.08]	12	675	90	C/1	DRY	SEE NOTE 1		-
324586	BU		330.2 [13.00]	173.0 [6.81]	239.8 [9.44]	12	950	185	C/3	WET	SEE NOTE 2	31	-
324587	BT		330.2 [13.00]	173.0 [6.81]	239.8 [9.44]	12	950	200	C/3	DRY	SEE NOTE 2	31	-
256984	BT		273.0 [10.75]	173.0 [6.81]	228.6 [9.00]	12	650	120	D/1	WET	SEE NOTE 1	24	-
225289	BR		273.0 [10.75]	173.0 [6.81]	228.6 [9.00]	12	650	130	D/1	DRY	SEE NOTE 1	24	-
345197	BS		273.0 [10.75]	173.0 [6.81]	228.6 [9.00]	12	510	80	E/1	WET	SEE NOTE 2	24F	-
354147	BT		330.2 [13.00]	173.0 [6.81]	239.8 [9.44]	12	700	170	C/3	WET	SEE NOTE 2	31	-
354148	BU		330.2 [13.00]	173.0 [6.81]	239.8 [9.44]	12	700	150	C/3	DRY	SEE NOTE 2	31	-
345309	BR		219.2 [8.63]	153.9 [6.06]	212.9 [8.38]	12	525	-	E/1	WET	SEE NOTE 1	55	-
GM22348	DC		525.3 [20.68]	220.5 [8.68]	251.0 [9.88]	12	1000	320	A/1	DRY	SEE NOTE 1		-
GM22349	BR		527.1 [20.75]	282.4 [11.12]	276.4 [10.88]	12	1150	400	A/1	DRY	SEE NOTE 1	8D	-
GM34399	BT		527.1 [20.75]	282.4 [11.12]	276.4 [10.88]	12	1400	430	A/1	WET	SEE NOTE 1	8D	-
GM48784	BT		298.0 [11.73]	173.0 [6.81]	196.9 [7.75]	12	525	70	D/1	WET		26	-
GM75512	BT		238.0 [9.38]	129.0 [5.06]	223.0 [8.81]	12	500	85	D/1	WET		51	-
10702000701	A		527.1 [20.75]	216.0 [8.50]	258.0 [10.16]	12	1050	290	A/1	WET		4D	-
10702001800	A		527.1 [20.75]	216.0 [8.50]	254.0 [10.0]	12	1110	380	A/1	AGM	SEE NOTE 3	4D	-
GM106681	-		260.0 [10.25]	171.0 [6.75]	208.0 [8.19]	12	690	105	D/1	WET		34	4.29
GM106375	-		330.2 [13.00]	171.0 [6.75]	239.8 [9.44]	12	925	180	C/3	WET	SEE NOTE 2	31	3.31
GM106373	-		260.0 [10.25]	171.0 [6.75]	229.0 [9.00]	12	650	95	D/1	WET	SEE NOTE 1	24	4.71
GM106377	-		527.1 [20.75]	279.0 [11.0]	254.0 [10.00]	12	1400	380	A/1	WET	SEE NOTE 1	80	2.53
GM106369	-		208.0 [8.19]	172.0 [6.77]	200.0 [7.87]	12	500	95	D/1	WET		26	5.85
GM106374	-		237.0 [9.32]	125.0 [4.94]	220.0 [8.66]	12	500	70	D/1	WET		51	5.00

NOTE: DIMENSIONS IN [] ARE ENGLISH EQUIVALENTS.

□ INDICATES PART NUMBERS AFFECTED BY LATEST DRAWING REVISION

ALTERNATE CONSTRUCTION ON BOTTOM OF BATTERIES ACCEPTABLE

LAYOUT A

LAYOUT B

LAYOUT C


LAYOUT D

LAYOUT E

REV	DATE	ON COMPOSITE DWGS. SEE PART NO. FOR REVISION LEVEL	BY	DO NOT SCALE. REFERENCE THE MODEL FOR ALL UNSPECIFIED DIMENSIONS
BY	5-6-16	(C-6) 10702001800: COLD CRANKING AMPS 1110	BGW	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS IN MILLIMETERS GENERAL TOLERANCES: X, Y & Z ± 0.25 SURFACE FINISH X, Y & Z ± 0.5 ANGLES & R ± 30° MAX.
CA	4-15-19	WAS 1100 [CT146053]		
		(C-8) GM106681, GM106375, GM106373,		
		GM106377, GM106369 & GM106374 ADDED; (D-3)		
		INTERNAL RESISTANCE (MΩ) COLUMN ADDED;		
		(D-8) 324586 & 256984 VOIDED; (C-8)		
		GM34399, GM48784, GM75512		
		VOIDED; (A,B-8,7,6,5,4) VIEWS & NOTES MOVED		
		TO SHEET 2, SHEET 2 ADDED [CT194425]	DS	
			APPROVED	

APPROVALS	DATE
DRWN	SLR 4-15-19
CHECKED	EB 4-15-19
APPROVED	RAD 4-15-19

TITLE	
DWG. BATTERY, DRY CHARGED	
SCALE	0.30 CAD NO.
DWG NO.	244578-CMP
SHEET 1 of 2	

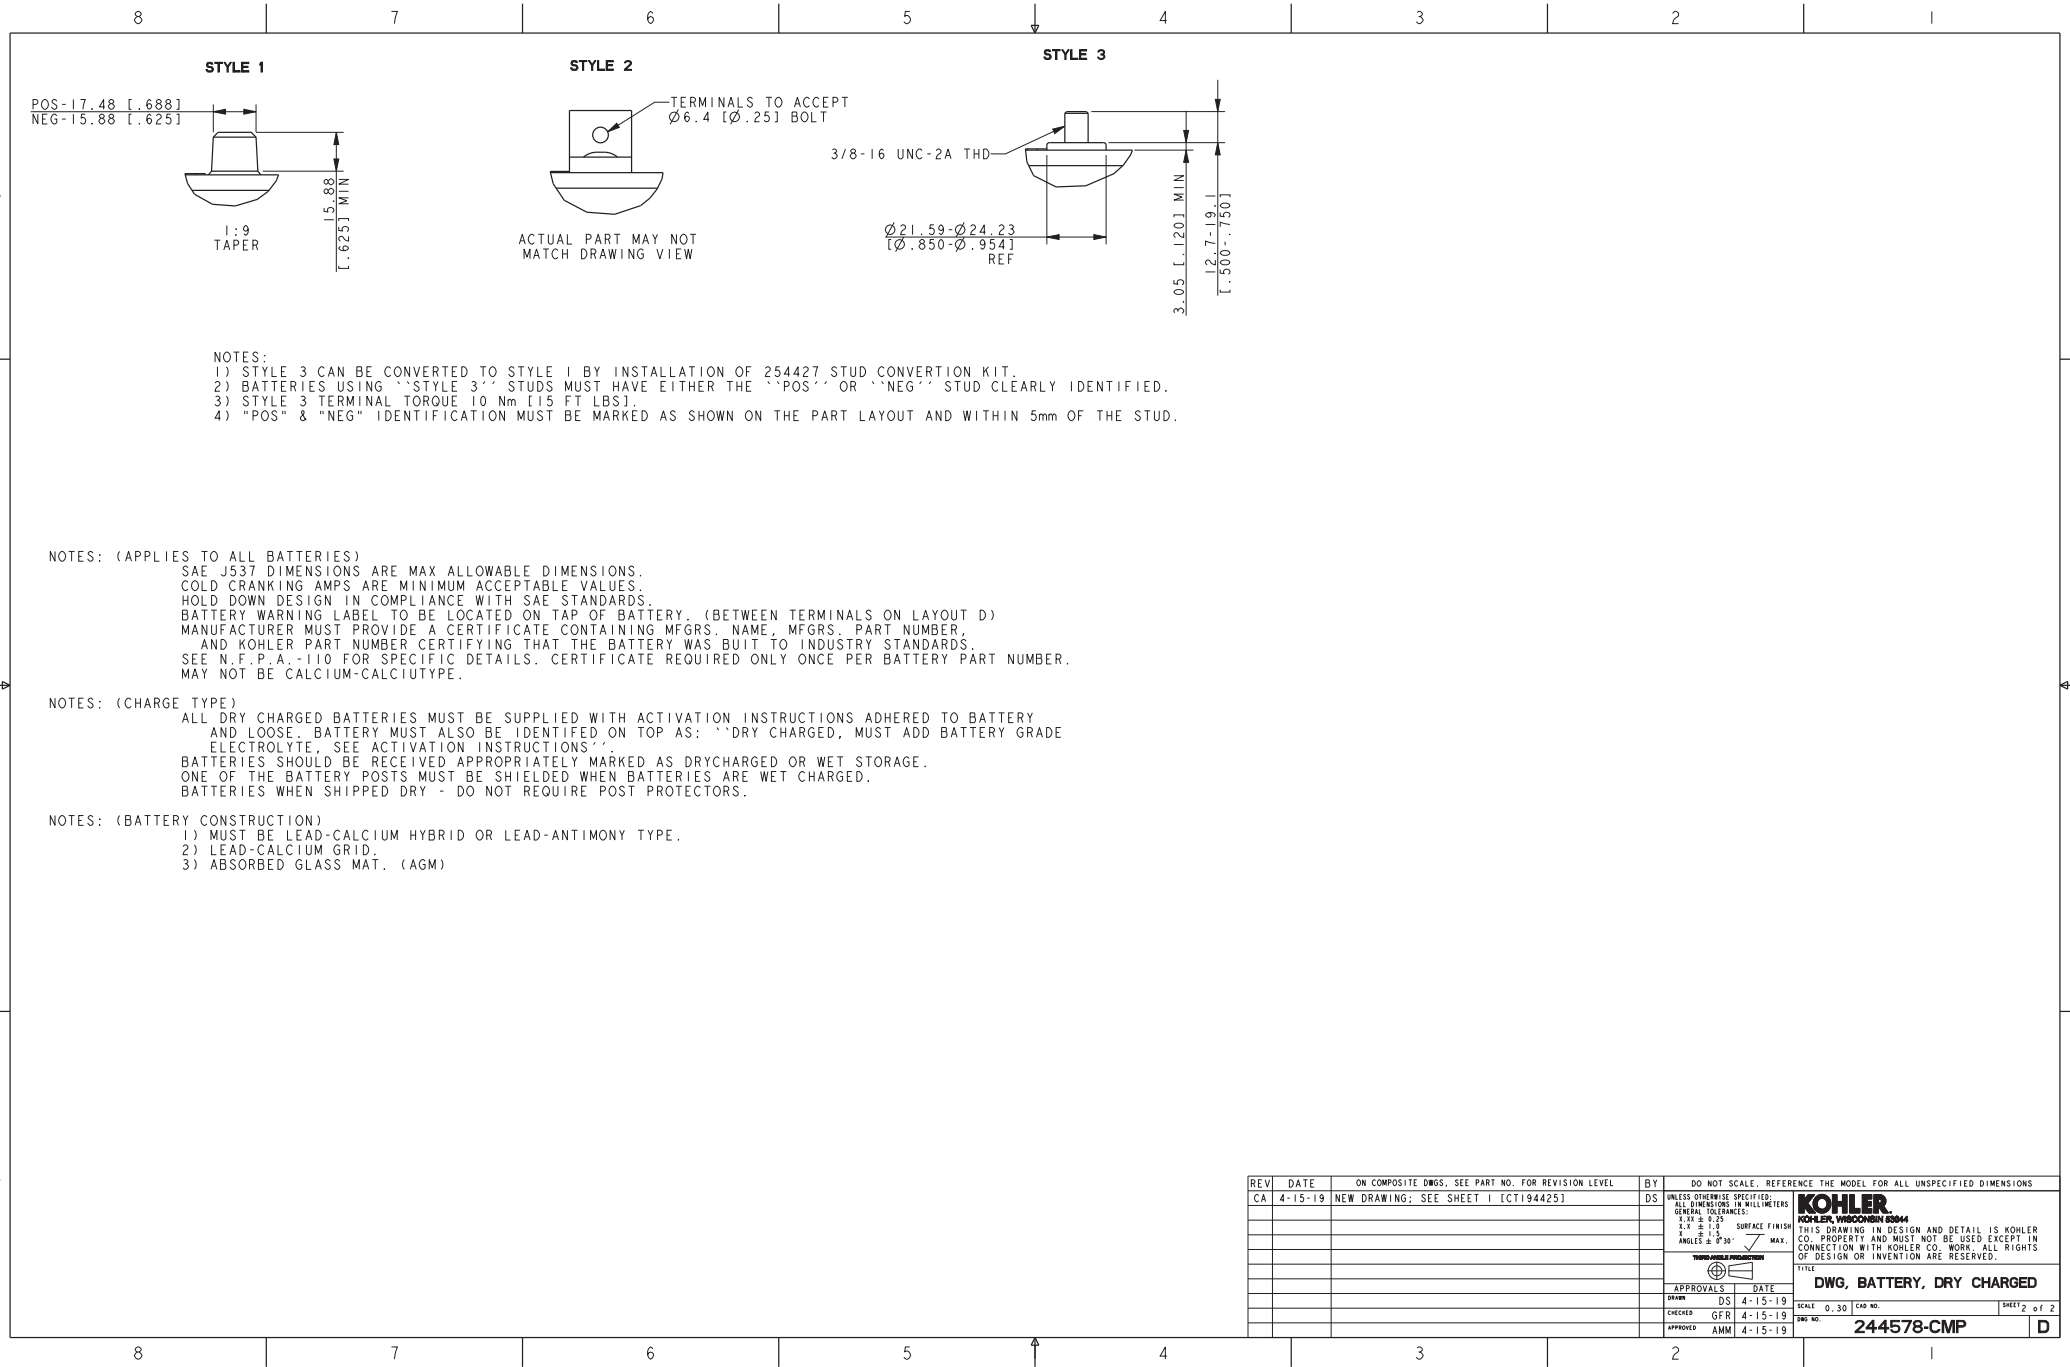

REV	DATE	ON COMPOSITE DWGS. SEE PART NO. FOR REVISION LEVEL	BY	DO NOT SCALE. REFERENCE THE MODEL FOR ALL UNSPECIFIED DIMENSIONS
CA	4-15-19	NEW DRAWING; SEE SHEET 1 [CT194425]	DS	UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS IN MILLIMETERS GENERAL TOLERANCES: X .125 ± .025 X .125 ± .025 SURFACE FINISH X .125 ± .025 MAX. ANGLES & Ø 30° ✓
				KOHLER KOHLER VIBROCORP 63044 THIS DRAWING IN DESIGN AND DETAIL IS KOHLER CO. PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.
				TITLE DWG, BATTERY, DRY CHARGED
				APPROVALS DATE DS 4-15-19 GFR 4-15-19 AMM 4-15-19
				SCALE 0.30 CAD NO. SHEET 2 of 2 DWG NO. 244578-CMP

OVERVIEW:
THE AUTOMATIC MULTI-LEVEL FLOAT/ EQUALIZE CHARGER SPECIFIED BELOW IS INTENDED TO CHARGE ENGINE STARTING BATTERIES EITHER INDEPENDENT OR IN CONJUNCTION WITH AN ENGINE DRIVEN CHARGING SYSTEM.

BATTERY TYPES TO BE CHARGED:

LEAD ACID
AGM
GEL CELL
HIGH PERFORMANCE AGM
FLOODED
NICKEL CADMIUM (NiCd)

INPUT AC:

INPUT VOLTAGE: 90-265V SINGLE PHASE
INPUT FREQUENCY: 47-63 Hz

INPUT LEAD:

APPROXIMATELY 1.8M (72") (REF) TYPE SJTOW -40°C TO 105°C UL RATED WIRE AND INSULATION. TERMINATED IN PRE-MOLDED UL RATED 3 PRONG NEMA 5-15 MALE AC PLUG.

DC OUTPUT:

10A @ 12V
10A @ 24V
VOLTAGE REGULATION: +/-1% (VOLTAGE AT EACH STAGE IS TOPOLOGY DEPENDENT)

OUTPUT LEAD:

APPROX. 1.8M (72") (REF) TYPE SJTOW -40°C TO 105°C UL RATED WIRE WITH RED AND BLACK WIRE INSULATION. TERMINATED IN 9.5 mm (REF) RING STYLE TERMINALS.

FUSES:

THE FUSE MUST BE LOCATED APPROXIMATELY 6" FROM RING TERMINAL ON RED OUTPUT LEAD.
20A ATC

ENVIRONMENTAL:

STORAGE TEMPERATURE RANGE: -40 TO +85°C (-40 TO +185°F)
OPERATING TEMPERATURE RANGE: -20 TO +70°C (-4 TO +158°F)
HUMIDITY: 5 TO 95% (NON-CONDENSING)
SALT SPRAY TESTING - ASTM B117
CORROSIN RESISTANT FROM GASSING OF BATTERIES

REVERSE POLARITY PROTECTION:

THE CHARGER SHALL SUSTAIN NO DAMAGE WHEN INCORRECTLY CONNECTED TO THE BATTERY IN REVERSE ORIENTATION.

MOUNTING:

4 NON-THREADED THROUGH HOLES FOR M6 FASTENERS TO PASS THOUGH

ENCLOSURE:

SHALL PROTECT THE CHARGER COMPONENTS FROM RAIN, SNOW, DUST AND DRIPPING WATER AND UNINTENTIONAL IMPACTS. ALL INTERNAL COMPONENTS PROTECTED FROM WATER DROPLETS.

INDICATORS:

POWER: INDICATES THE ACCEPTABILITY OF AC INPUT TO THE CHARGER
COMMUNICATION: INDICATES THE STATE OF THE COMMUNICATION SYSTEM
TEMPERATURE COMPENSATION: INDICATES THE STATE OF THE TEMPERATURE COMPENSATION SUBSYSTEM WHEN INSTALLED
VOLTAGE OUTPUT: INDICATES THE STATE OF THE BATTERY AND CERTAIN FAULT CONDITIONS.

DOCUMENTATION:

THERE SHALL BE AN INSTALLATION / OPERATIONAL MANUAL SUPPLIED WITH EACH CHARGER. PER KOHLER SUPPLIED ARTWORK.

CERTIFICATIONS (US AND CANADA):

UL1236
CSA - C22.2 NO 107.2-01
FCC- TITLE 47, PART 15 CLASS A
CE
EN 61000-6-2
CEC AND DOE
NFPA-110 LEVEL 1 (WHEN SUPPORTED WITH APPLICABLE KOHLER CONTROLLER)
IBC

PRODUCT LABELING:


THE LABEL ATTACHED TO THE CHARGER SHALL HAVE THE FOLLOWING INFORMATION:

UL LISTING
KOHLER PART NUMBER
DESCRIPTION OF ALL INDICATOR
OUTPUT CURRENT AND VOLTAGE
INPUT VOLTAGE AND FREQUENCY

PACKAGING LABEL:
THE PACKAGING LABEL SHALL CONTAIN THE FOLLOWING INFORMATION:
KOHLER P/N
DESCRIPTION - BATTERY CHARGER
MFG. MODEL NO
MFG. PART NUMBER
DATE CODE

WARRANTY:

2 YEAR FROM DATE OF PURCHASE FROM MANUFACTURE.

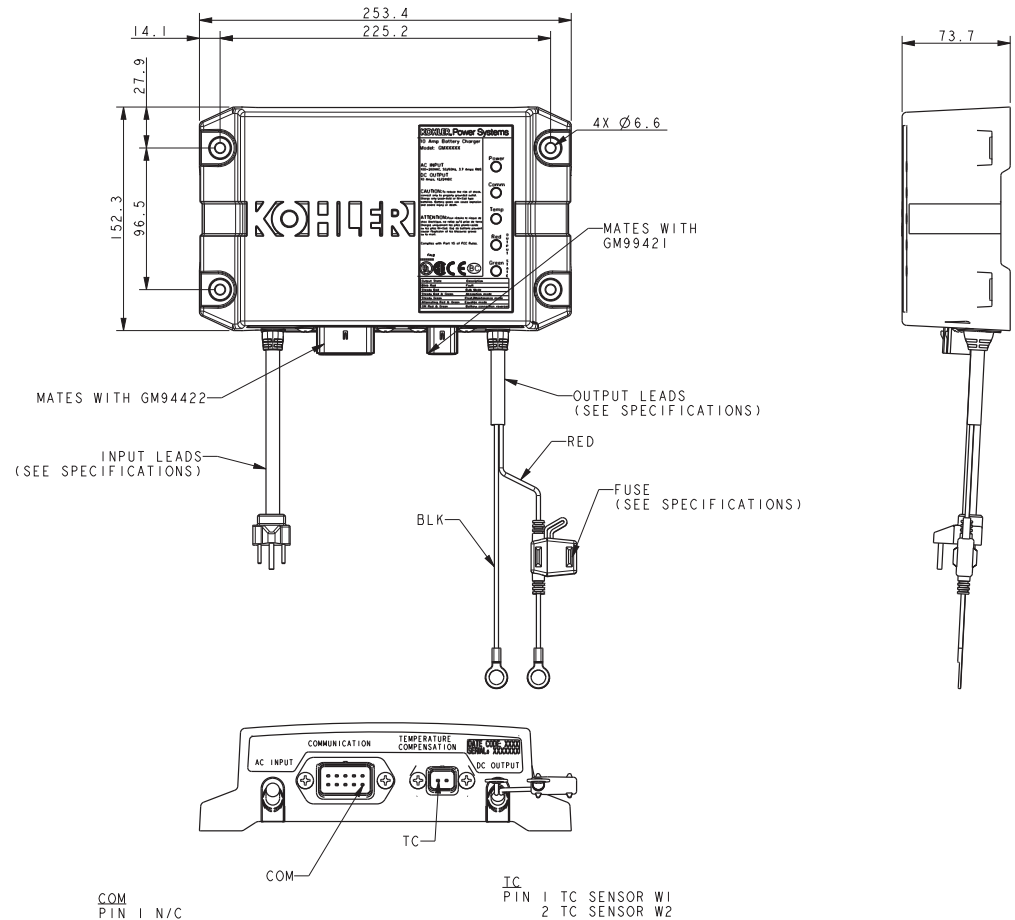


COM
PIN 1 N/C
2 ID SEL 1
3 ID SEL 2
4 N/C
5 CAN-H
6 N/C
7 ID SEL 1 RTN
8 ID SEL 2 RTN
9 CAN-GND
10 CAN-L

TC
PIN 1 TC SENSOR W1
2 TC SENSOR W2

REV	DATE	ON COMPOSITE DWGS. SEE PART NO. FOR REVISION LEVEL	BY	UNLESS OTHERWISE SPECIFIED: 1) DIMENSIONS ARE IN MILLIMETERS 2) TOLERANCES ARE: X.XX ± 0.25 X.X ± 0.5 X ± 1.5 ANGLES ± 0° 30' MAX.
-	9-22-14	NEW DRAWING [CT91634]	SAM	
A	5-9-17	(C-4,2) MATING NOTE ADDED (A-2, 4) PIN CONNECTIONS ADDED [CT174256]	SAM	
THIS DRAWING IS THE PROPERTY OF KOHLER CO. AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION IN WRITING FROM KOHLER CO.				
APPROVALS				
DESIGNED	DATE	9-22-14		
CHECKED	SAM	9-22-14		
APPROVED	SAM	9-22-14		
AGT	AGT	9-22-14		

KOHLER CO. METRIC PRO-E	
POWER SYSTEMS, KOHLER, WI 53044 U.S.A.	
THIS DRAWING IN DESIGN AND DETAIL IS KOHLER CO. PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.	
TITLE	
CHARGER, BATTERY 10 AMP	
SCALE	0.50 CAD NO.
DWG NO.	GM87448
SHEET	1 of 1
DWG NO.	GM87448


KIT NO.	ITEM	PART NO	QTY	DESCRIPTION
GM94920-KA1				ASSY BATTERY CHARGER 12/24V-10A
	1	GM87448	1	CHARGER, BATTERY
	2	GM94448	1	BRKT, 10 AMP BATTERY CHARGER
	3	M125A-06-80	4	WASHER, PLAIN 6.4 ID X 12.0 OD
	4	M6923-06-80	8	NUT, HEX 6MM
	5	M933-06016-60	4	SCREW, HEX CAP
	6	M933-06030-60	4	SCREW, HEX CAP
GM94920-KA2				ASSY BATTERY CHARGER 12/24V-10A
	1	GM87448	2	CHARGER, BATTERY
	2	GM94448	2	BRACKET, 10 AMP BATTERY CHARGER
	3	M125A-06-80	8	WASHER, PLAIN 6.4 ID X 12.0 OD
	4	M6923-06-80	12	NUT, HEX 6MM
	5	M933-06016-60	4	SCREW, HEX CAP
	6	M933-06030-60	8	SCREW, HEX CAP
	7	GM95017	1	HARNESS, Y
THIS IS AN AUTOMATED TABLE. ALL UPDATES MUST BE MADE IN THE ASSEMBLY.				

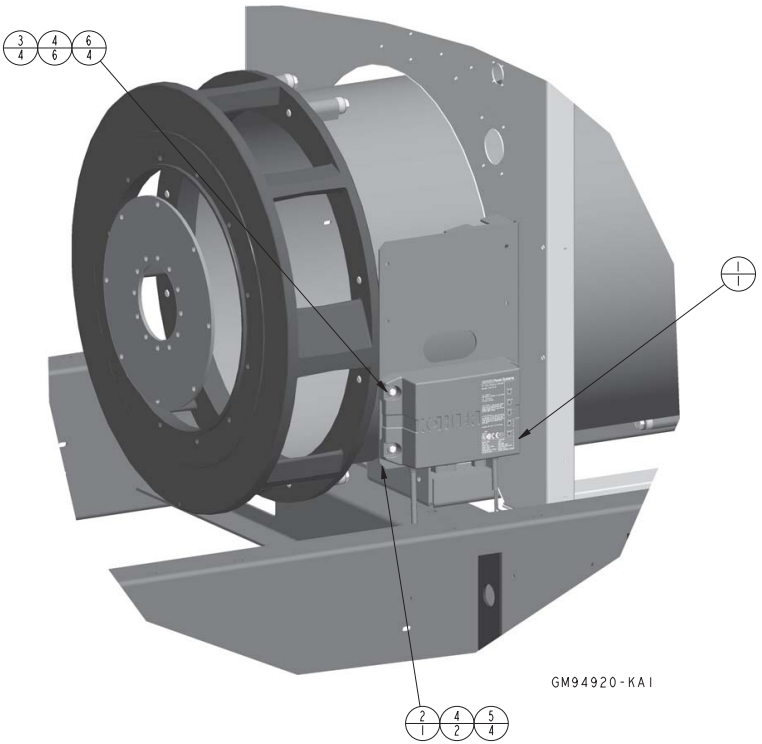

NOTE: FOR PROPER ASSEMBLY METHOD OF HARDWARE, USE G-585 AS A GUIDELINE.

REV	DATE	ON COMPOSITE DWGS. SEE PART NO. FOR REVISION LEVEL	BY	UNLESS OTHERWISE SPECIFIED: 1) DIMENSIONS ARE IN MILLIMETERS 2) TOLERANCES ARE: X.XX ± 0.25 Z.P. ± 1.5 ANGLES ± 0° 30' MAX. SURFACE FINISH FRACTIONAL PRODUCTION	TITLE
-	10-2-14	NEW DRAWING [CT95303]	SAM		KOHLER CO. METRIC PRO-E
A	11-28-16	(D-8) M6923-06-80: 8 WAS 6, M933-06016-60: 4 WAS 2, GM94920-KA2 VOIDED, VIEW REMOVED [CT166633]	SAM		POWER SYSTEMS, KOHLER, WI 53044 U.S.A. THIS DRAWING IN DESIGN AND DETAIL IS KOHLER CO. PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.
					DWG, ASSY BATTERY CHARGER
					SCALE 0.25 CAD NO. SHEET 1 of 1
					DWG NO. GM94920
					D

PART NO	REV	WATTS	VOLTS	AMPS	TEMP RANGE	REPLACEMENT ELEMENT
GM76113	A		90/120	15.6/20.8	27/38° C [80/100° F]	GM29477
GM76114	A		190/208	11.0/12.0		GM29478
GM76115	A	2500	210/240	9.1/10.4		GM29474
GM76116	A		380/480	4.1/5.2		GM29479
ES-75616	A		240/227	7.8/9.0		ES-75542



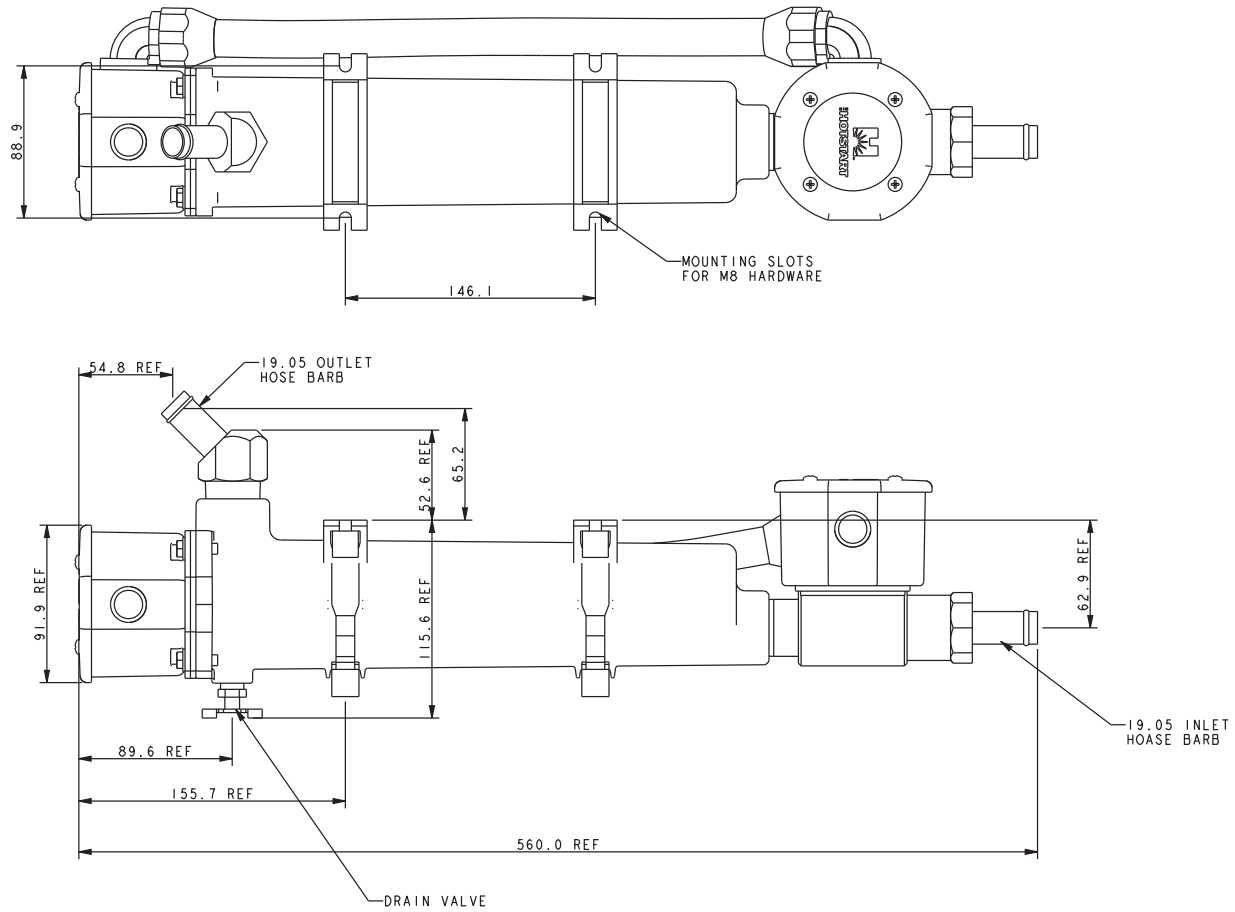


200/350 KW JD


REV	DATE	ON COMPOSITE DWGS. SEE PART NO. FOR REVISION LEVEL	BY	UNLESS OTHERWISE SPECIFIED:	KOHLER CO. METRIC PRO-E
-	6-9-10	NEW DRAWING [89933-1]	SAM	1) DIMENSIONS ARE IN MILLIMETERS 2) TOLERANCES ARE: X.XX ± 0.25 X.X ± 0.5 X ± 1.5 ANGLES ± 0° 30' MAX.	POWER SYSTEMS, KOHLER, WI 53044 U.S.A. THIS DRAWING IN DESIGN AND DETAIL IS KOHLER CO. PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.
A	12-9-10	(D-8) ES-75616 ADDED. GM76113: 15.6/20.8 WAS 27.8/20.8, GM76114: 11.0/12.0 WAS 13.2/12.0, GM76115: 9.1/10.4 WAS 11.9/10.4, GM76116: 4.1/5.2 WAS 6.6/5.2 [90699]	SAM	FAVORABLE PRODUCTION	TITLE HEATER, BLOCK
			APPROVALS	DATE	SCALE 0.70 CAD NO.
			SHOWN	SAM	6-9-10
			CHECKED	JMS	6-9-10
			APPROVED	WRD	6-9-10
					DWG NO. GM76113
					SHEET 1 of 1 D

D


KIT NO.	ITEM	PART NO	QTY	DESCRIPTION
GM76120-KB	1	25452-00075	5.34FT	BASE GRP, BLOCK HEATER
	2	X-6367-6 (REF)	1	HOSE, COOLANT
	3	X-6367-14 (REF)	1	HOSE, COOLANT 29"
	4	29808-00750	1.33FT	SLEEVE, SPLIT WRAP BRAIDED, 3/4" DIA
	5	273692	1	ADAPTER, BUSHING
	6	273693	1	O-RING (1.475" ID)
	7	279047	1	TAG, INSTRUCTION
	8	GM19670	2	VALVE, SHUTOFF (1/2-14NPT)
	9	GM39752	1	TAG, HANG
	10	GM51263	1	BRACKET, BLOCK HEATER
	11	M125A-06-80	4	WASHER, PLAIN
	12	M125A-08-80	2	WASHER, PLAIN 8.4 ID X 16.0 OD
	13	M125A-10-80	2	WASHER, PLAIN 10.5 ID X 20.0 OD
	14	M6923-06-80	4	NUT, HEX 6MM
	15	M6923-08-80	2	NUT, HEX 8MM
	16	M6923-10-80	2	NUT, HEX 10MM
	17	M933-06025-60	4	SCREW, HEX CAP
	18	M933-08025-60	2	SCREW, HEX CAP
	19	M933-10025-60	2	SCREW, HEX CAP, FULLY THRD M10 X 25MM
	20	X-209-21	2	PIPE (1/2"NPT X 4.50")
	21	X-209-5	2	PIPE (1/2"NPT X 1.50")
	22	X-215-1	2	ELBOW, PIPE (90 DEG X 1/2"NPT)
	23	X-426-12	4	CLAMP, HOSE, .69/1.25 IN.
	24	X-582-7	2	CONNECTOR, HOSE + VIBRA SEAL
	25	X-672-20	2	CLAMP, INSULATED, 1.25 IN.
GM76120-KA1	26	GM76113	1	BLOCK HEATER, 2500W, 90/120V IPH
GM76120-KA2	26	GM76114	1	BLOCK HEATER, 2500W, 190/208V IPH
GM76120-KA3	26	GM76115	1	BLOCK HEATER, 2500W, 210/240V IPH
GM76120-KA4	26	GM76116	1	BLOCK HEATER, 2500W, 380/480V IPH
THIS IS AN AUTOMATED TABLE. ALL UPDATES MUST BE MADE IN THE ASSEMBLY. ITEMS 1-3 & 25 ARE FIXED. ITEM 1 IS A MANUAL BALLOONS.				

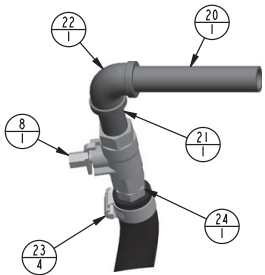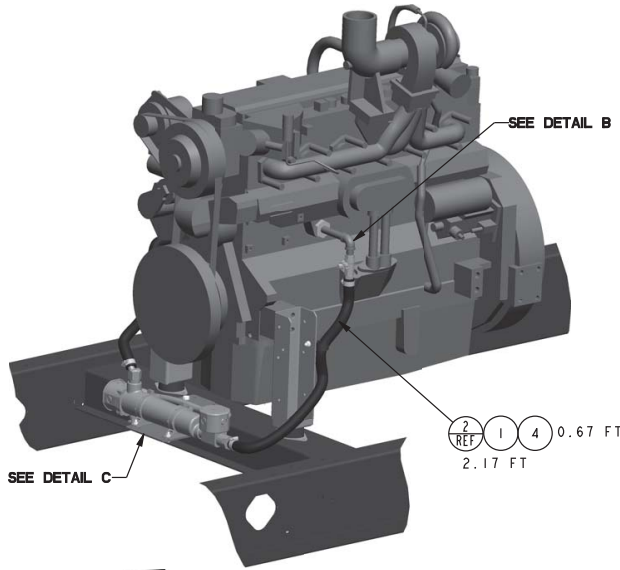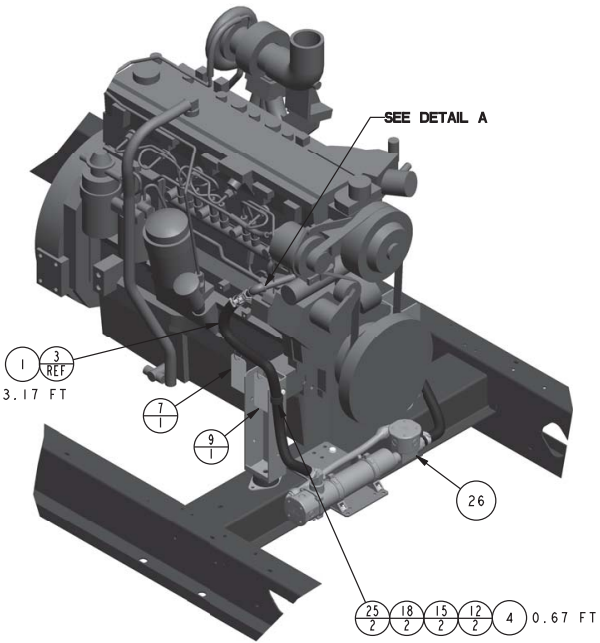

DETAIL A
SCALE 0.50

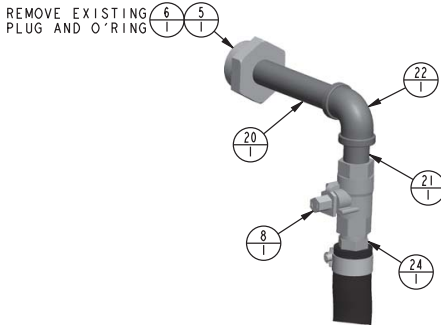

DETAIL B
SCALE 0.50

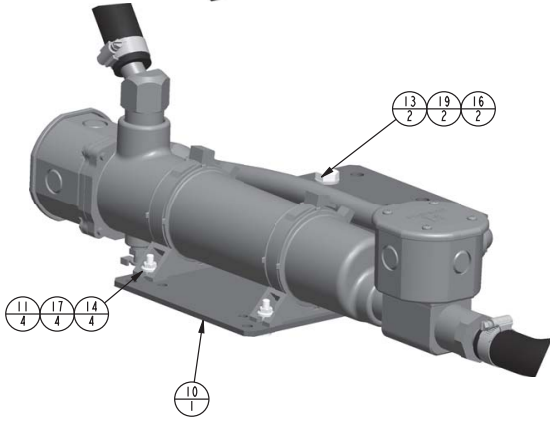

DETAIL C
SCALE 0.50

NOTE: FOR PROPER ASSEMBLY METHOD OF HARDWARE, USE G-585 AS A GUIDELINE.

REV	DATE	ON COMPOSITE DWGS. SEE PART NO. FOR REVISION LEVEL	BY	UNLESS OTHERWISE SPECIFIED:
-	6-14-10	NEW DRAWING [89933-2]	SAM	1) DIMENSIONS ARE IN MILLIMETERS
A	9-28-10	(C-5) X-6367-14 WAS X-6367-12; (C-1)	SAM	2) TOLERANCES ARE:
		X-6367-6 WAS X-6367-11; (C-8) X-209-21 (2)		2. P. ± 0.25
		WAS X-209-11 & X-209-18; X-6003-121 REMOVED;		3. P. ± 0.5
		VIEWS UPDATED [90099-3]	DJV	4. SURFACE FINISH
B	3-31-11	(C-8) X-672-20 WAS X-672-4 [90379-16]	SAM	ANGLES A 0° 30° MAX.
C	10-24-11	(C-4) BLOCK HEATER MOVED & ROTATED 180° [92388]	SAM	
D	10-18-12	(D-8) 29808-00750 ADDED [CT27071]	SVP	
			APPROVED	

KOHLER CO. METRIC PRO-E

POWER SYSTEMS, KOHLER, WI 53044 U.S.A.

THIS DRAWING IN DESIGN AND DETAIL IS KOHLER CO. PROPERTY AND MUST NOT BE USED EXCEPT IN CONNECTION WITH KOHLER CO. WORK. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

TITLE

DWG, ASSY BLOCK HEATER

SCALE 0.1:1

CAD NO.

DWG NO. **GM76120**

SHEET 1 of 1




D

NOTE: (4) #10-32 X 4.5 INCH MOUNTING SCREWS INCLUDED.




NOTE:
KOHLER PART # TO BE CLEARLY VISIBLE ON
CIRCUIT BREAKER AND ON INDIVIDUAL PACKAGING.

NOTE:
THREADED BAR SUPPLIED WITH BREAKER IS USED WITH LUGS OR WHEN
BUS BARS ARE INSTALLED WITH BOLTS INSERTED FROM THE FRONT.
REMOVE AND DISCARD BAR WHEN BOLTS ARE INSTALLED FROM THE REAR
OF BREAKER.

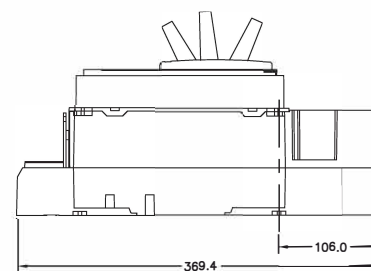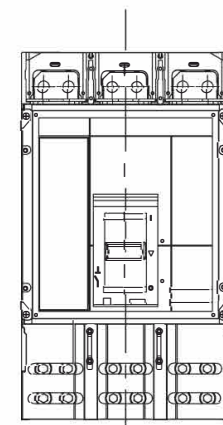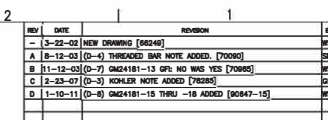

1000-1200A
DIMENSIONS SAME AS 600-800A
EXCEPT WHERE NOTED

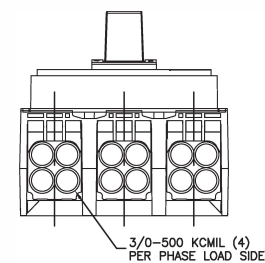

METRIC CAD FILE

34426 ENGINE SPEC'D - 1) OVERHAUL IN 6 MONTHS 2) REBUILD IN 12 3) A.L. 1.0 4) A.L. 1.5 5) A.L. 2.0 6) A.L. 2.5 7) A.L. 3.0 8) A.L. 3.5 9) A.L. 4.0 10) A.L. 4.5 11) A.L. 5.0 12) A.L. 5.5 13) A.L. 6.0 14) A.L. 6.5 15) A.L. 7.0 16) A.L. 7.5 17) A.L. 8.0 18) A.L. 8.5 19) A.L. 9.0 20) A.L. 9.5 21) A.L. 10.0 22) A.L. 10.5 23) A.L. 11.0 24) A.L. 11.5 25) A.L. 12.0 26) A.L. 12.5 27) A.L. 13.0 28) A.L. 13.5 29) A.L. 14.0 30) A.L. 14.5 31) A.L. 15.0 32) A.L. 15.5 33) A.L. 16.0 34) A.L. 16.5 35) A.L. 17.0 36) A.L. 17.5 37) A.L. 18.0 38) A.L. 18.5 39) A.L. 19.0 40) A.L. 19.5 41) A.L. 20.0 42) A.L. 20.5 43) A.L. 21.0 44) A.L. 21.5 45) A.L. 22.0 46) A.L. 22.5 47) A.L. 23.0 48) A.L. 23.5 49) A.L. 24.0 50) A.L. 24.5 51) A.L. 25.0 52) A.L. 25.5 53) A.L. 26.0 54) A.L. 26.5 55) A.L. 27.0 56) A.L. 27.5 57) A.L. 28.0 58) A.L. 28.5 59) A.L. 29.0 60) A.L. 29.5 61) A.L. 30.0 62) A.L. 30.5 63) A.L. 31.0 64) A.L. 31.5 65) A.L. 32.0 66) A.L. 32.5 67) A.L. 33.0 68) A.L. 33.5 69) A.L. 34.0 70) A.L. 34.5 71) A.L. 35.0 72) A.L. 35.5 73) A.L. 36.0 74) A.L. 36.5 75) A.L. 37.0 76) A.L. 37.5 77) A.L. 38.0 78) A.L. 38.5 79) A.L. 39.0 80) A.L. 39.5 81) A.L. 40.0 82) A.L. 40.5 83) A.L. 41.0 84) A.L. 41.5 85) A.L. 42.0 86) A.L. 42.5 87) A.L. 43.0 88) A.L. 43.5 89) A.L. 44.0 90) A.L. 44.5 91) A.L. 45.0 92) A.L. 45.5 93) A.L. 46.0 94) A.L. 46.5 95) A.L. 47.0 96) A.L. 47.5 97) A.L. 48.0 98) A.L. 48.5 99) A.L. 49.0 100) A.L. 49.5 101) A.L. 50.0 102) A.L. 50.5 103) A.L. 51.0 104) A.L. 51.5 105) A.L. 52.0 106) A.L. 52.5 107) A.L. 53.0 108) A.L. 53.5 109) A.L. 54.0 110) A.L. 54.5 111) A.L. 55.0 112) A.L. 55.5 113) A.L. 56.0 114) A.L. 56.5 115) A.L. 57.0 116) A.L. 57.5 117) A.L. 58.0 118) A.L. 58.5 119) A.L. 59.0 120) A.L. 59.5 121) A.L. 60.0 122) A.L. 60.5 123) A.L. 61.0 124) A.L. 61.5 125) A.L. 62.0 126) A.L. 62.5 127) A.L. 63.0 128) A.L. 63.5 129) A.L. 64.0 130) A.L. 64.5 131) A.L. 65.0 132) A.L. 65.5 133) A.L. 66.0 134) A.L. 66.5 135) A.L. 67.0 136) A.L. 67.5 137) A.L. 68.0 138) A.L. 68.5 139) A.L. 69.0 140) A.L. 69.5 141) A.L. 70.0 142) A.L. 70.5 143) A.L. 71.0 144) A.L. 71.5 145) A.L. 72.0 146) A.L. 72.5 147) A.L. 73.0 148) A.L. 73.5 149) A.L. 74.0 150) A.L. 74.5 151) A.L. 75.0 152) A.L. 75.5 153) A.L. 76.0 154) A.L. 76.5 155) A.L. 77.0 156) A.L. 77.5 157) A.L. 78.0 158) A.L. 78.5 159) A.L. 79.0 160) A.L. 79.5 161) A.L. 80.0 162) A.L. 80.5 163) A.L. 81.0 164) A.L. 81.5 165) A.L. 82.0 166) A.L. 82.5 167) A.L. 83.0 168) A.L. 83.5 169) A.L. 84.0 170) A.L. 84.5 171) A.L. 85.0 172) A.L. 85.5 173) A.L. 86.0 174) A.L. 86.5 175) A.L. 87.0 176) A.L. 87.5 177) A.L. 88.0 178) A.L. 88.5 179) A.L. 89.0 180) A.L. 89.5 181) A.L. 90.0 182) A.L. 90.5 183) A.L. 91.0 184) A.L. 91.5 185) A.L. 92.0 186) A.L. 92.5 187) A.L. 93.0 188) A.L. 93.5 189) A.L. 94.0 190) A.L. 94.5 191) A.L. 95.0 192) A.L. 95.5 193) A.L. 96.0 194) A.L. 96.5 195) A.L. 97.0 196) A.L. 97.5 197) A.L. 98.0 198) A.L. 98.5 199) A.L. 99.0 200) A.L. 99.5 201) A.L. 100.0 202) A.L. 100.5 203) A.L. 101.0 204) A.L. 101.5 205) A.L. 102.0 206) A.L. 102.5 207) A.L. 103.0 208) A.L. 103.5 209) A.L. 104.0 210) A.L. 104.5 211) A.L. 105.0 212) A.L. 105.5 213) A.L. 106.0 214) A.L. 106.5 215) A.L. 107.0 216) A.L. 107.5 217) A.L. 108.0 218) A.L. 108.5 219) A.L. 109.0 220) A.L. 109.5 221) A.L. 110.0 222) A.L. 110.5 223) A.L. 111.0 224) A.L. 111.5 225) A.L. 112.0 226) A.L. 112.5 227) A.L. 113.0 228) A.L. 113.5 229) A.L. 114.0 230) A.L. 114.5 231) A.L. 115.0 232) A.L. 115.5 233) A.L. 116.0 234) A.L. 116.5 235) A.L. 117.0 236) A.L. 117.5 237) A.L. 118.0 238) A.L. 118.5 239) A.L. 119.0 240) A.L. 119.5 241) A.L. 120.0 242) A.L. 120.5 243) A.L. 1	
---	--


SQUARE D P-FRAME CIRCUIT BREAKER
3 POLE ELECTRONIC TRIP

STANDARD BREAKER COMBINATIONS			
BREAKER 1	BREAKER 2	BREAKER 3	TRIP TYPE
H OR J	-	-	ALL
LA	-	-	ALL
LG	-	-	ALL
M	-	-	ALL
P	-	-	ALL
H OR J	H OR J	-	ALL
LA	H, J OR LA	-	ALL
LG	H, J, LA OR LG	-	ALL
M OR P	H, J, LA OR LG	-	ALL
P	P	-	NO LSIG
H OR J	H OR J	H OR J	NO LSIG
LA	H OR J	H OR J	NO LSIG
LA	LA	H, J OR LA	NO LSIG
LG	H OR J	H OR J	NO LSIG
LG	LA	LA, H, J	NO LSIG
LG	LG	H, J, LA OR LG	NO LSIG
M OR P	H OR J	H OR J	NO LSIG
M OR P	LA	H, J OR LA	NO LSIG
M OR P	LG	H, J, OR LG	NO LSIG


AL/CU MECHANICAL LOAD LUGS PER PHASE			
BREAKER FRAME	AMPS	WIRE RANGE	A WIRE BENDING SPACE
H	15-150	(1) #14 TO 3/0	530 [20.8]
	175	(1) 1/0 TO 4/0	
J	200-250	(1) 3/0 TO 350 KCMIL	516 [20.3]
	300-400	(1) #1 TO 600 KCMIL OR (2) #1 TO 250 KCMIL	472 [18.6]
LA	400-600	(2) 2/0 TO 500 KCMIL AL/CU	480 [18.9]
M	800	(3) 3/0 TO 500 KCMIL	454 [17.9]
P	250-800	(3) 3/0 TO 500 KCMIL	
P	1000-1200	(4) 3/0 TO 500 KCMIL	412 [16.2]
MECHANICAL LOAD LUGS INCLUDED WITH H, J & LG LSIG NEUTRALS			
H	60-150	(1) #14 TO 3/0 AWG AL/CU	
J	250	(1) 3/0 TO 350 KCMIL AL/CU	
LG	400-600	(2) 4/0 TO 500 KCMIL AL/CU	

NOTES:


- 1) SEE UNIT DIMENSION PRINT (ADV-XXXX) FOR ADDITIONAL DIMENSIONS, JUNCTION BOX AND STUB-UP LOCATION.
- 2) ADD SKID DEPTH TO WIRE BENDING HEIGHTS ON THIS PRINT TO ARRIVE AT FULL WIRE-BENDING SPACE.
- 3) CONSULT FACTORY FOR BREAKER COMBINATIONS NOT SHOWN ON THIS PRINT.
- 4) MECHANICAL LUGS ARE AVAILABLE FOR NON-LSIG NEUTRAL. SEE ADV-7376. H, J & LG LSIG NEUTRALS INCLUDE LUGS (SEE CHART).
- 5) NEUTRALS ARE BONDED TO GROUND AS STANDARD. CONSULT LOCAL CODES OR SYSTEM REQUIREMENTS.
- 6) CIRCUIT BREAKER FRAMES REFER TO STANDARD SQUARE-D PRODUCT.
- 7) STANDARD NEUTRALS PROVIDED ARE SIZED FOR MAXIMUM UNIT AMPS. LSIG NEUTRALS ARE MATCHED TO THEIR CIRCUIT BREAKER AMPS.
- 8) DIMENSIONS ARE MM, DIMENSIONS IN [] ARE INCHES.

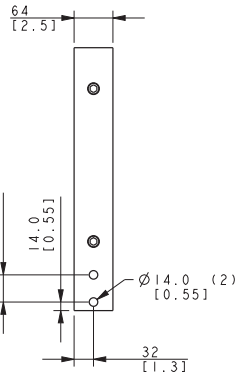

625A NEUTRAL

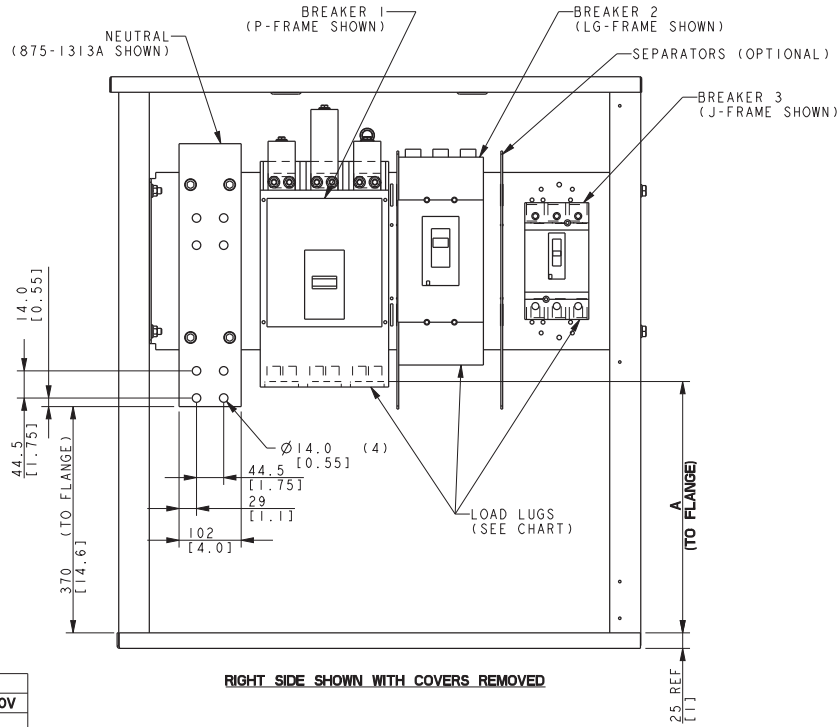

RIGHT SIDE SHOWN WITH COVERS REMOVED

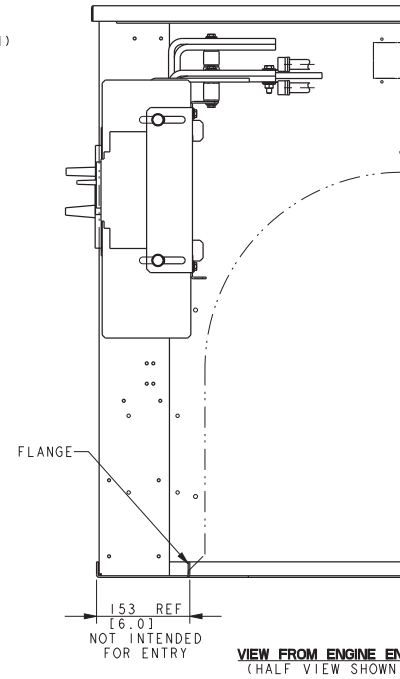

VIEW FROM ENGINE END
(HALF VIEW SHOWN)

ELECTRONIC TRIP UNITS		
FRAME	TRIP UNIT	
H	LI	MICROLOGIC 3.2
	LSI	MICROLOGIC 3.2S
	LSIG	MICROLOGIC 6.2A
J	LI	MICROLOGIC 3.2
	LSI	MICROLOGIC 3.2S
	LSIG	MICROLOGIC 6.2A
LG	LI	MICROLOGIC 3.3
	LSI	MICROLOGIC 3.3S
	LSIG	MICROLOGIC 6.3A
M	LI	ET 1.0
	I	ET 1.01
	LSI	MICROLOGIC 3.0
P	LSI	MICROLOGIC 5.0
	LSIG	MICROLOGIC 6.0A

UL INTERRUPT kA RATINGS			
BREAKER	240V	480V	600V
HD	25	18	14
HG	65	35	18
HJ	100	65	25
JD	25	18	14
JG	65	35	18
JJ	100	65	25
LA	42	30	22
LG	65	35	18
MG	65	35	18
PG	65	35	18
PJ	100	65	25
PL	125	100	25

ELECTRICALLY OPERATED BREAKERS FOR DEC6000 DPS OR APM603 PARALLELING ONLY NO 2ND BREAKERS ARE ALLOWED			
RATING	AMPS	TRIP TYPE	FRAME
100X	250	ELECTRONIC LI OR LSI	PJ OR PL
	400		
	600		
	800		
	1000		
	1200		

LCB KITS
4UA, 4M6226
ALTERNATOR FRAMES

REV	DATE	ON COMPOSITE DWGS, SEE PART NO. FOR REVISION LEVEL	BY	DO NOT SCALE. REFERENCE THE MODEL FOR ALL UNSPECIFIED DIMENSIONS
-	7-10-07	NEW DRAWING [79677]	WSD	
A	5-26-15	(B-8) 625A WAS 500A, VIEW UPDATED [83690]	WSD	
B	4-22-08	(D-8) 15-150 WAS 40-150 [84767]	WSD	
C	10-19-12	UPDATED D TO LG, 100X H/J ADDED, LSIG NEUTRAL LUG CHART ADDED [CT26372]	WSD	
D	11-2-16	(D-6) REMOVED SEPARATE LINES FOR H & J 100X LUGS; (D-8) UPDATED TABLE AND ADDED 3RD LCBS [CT114236]	WSD	
E	3-26-19	(A-6) EOB TABLE ADDED [CT194577]	WSD	
F	6-23-21	(D-6) M 800A WAS 700 & 800, LI WAS 1 [CT212837]	WSD	

APPROVALS		DATE
WSD	WSD	7-10-07
WSD	WSD	7-10-07
WSD	WSD	7-10-07
WSD	WSD	7-10-07

TITLE	
DIMENSION PRINT	
SCALE	0.25
CAD NO.	
SHEET	1 of 1
DWG NO.	ADV-7372
	D



Warranty

Stationary Standby and Prime Power Industrial Generator Set One-Year or Two Thousand (2000)-Hour Limited Warranty

Your Kohler product has been manufactured and inspected with care by experienced craftsmen. If you are the original end user, Kohler Co. warrants, for the period indicated below, each product to be free from defects in materials and workmanship. In the event of a defect in materials or workmanship, Kohler Co. will repair, replace, or make appropriate adjustment at Kohler Co.'s option if the product, upon Kohler Co.'s inspection, is found to be properly installed, maintained, and operated in accordance with Kohler Co.'s instruction manuals. A Kohler distributor, dealer, or authorized service representative must perform startup.

Kohler Product

Stationary Standby Generator Set & Accessories

Warranty Coverage

One (1) year from registered startup or two thousand (2000) hours (whichever occurs first). In any event, the warranty period will expire not later than thirty (30) months from the date of shipment from Kohler Co.'s factory.

Stationary Prime Power Generator Set & Accessories

One (1) year from registered startup or two thousand (2000) hours (whichever occurs first). In any event, the warranty period will expire not later than thirty (30) months from the date of shipment from Kohler Co.'s factory.

The following will **not** be covered by the warranty:

1. Normal wear, routine tuneups, tuneup parts, adjustments, and periodic service.
2. Damage, including but not limited to damage caused by accidents, improper installation or handling, faulty repairs not performed by an authorized Kohler service representative, improper storage, or acts of God.
3. Damage caused by operation at speeds, or with fuel, loads, conditions, modifications or installation contrary to published specifications.
4. Damage caused by negligent maintenance such as:
 - a. Failure to provide the specified type and sufficient quantity of lubricating oil.
 - b. Failure to keep the air intake and cooling fin areas clean.
 - c. Failure to service the air cleaner.
 - d. Failure to provide sufficient coolant and/or cooling air.
 - e. Failure to perform scheduled maintenance as prescribed in supplied manuals.
 - f. Failure to regularly exercise the generator set under load (stationary applications only).
5. Original installation charges and startup costs.
6. Starting batteries and the following related expenses:
 - a. Labor charges related to battery service.
 - b. Travel expenses related to battery service.
7. Additional expenses for repairs performed after normal business hours, i.e. overtime or holiday labor rates.
8. Rental of equipment during the performance of warranty repairs.
9. Removal and replacement of non-Kohler-supplied options and equipment.
10. Non-Kohler replacement parts. Replacement of a failed Kohler part with a non-Kohler part voids the warranty on that part.
11. Radiators replaced rather than repaired.
12. Fuel injection pumps not repaired by an authorized Kohler service representative.
13. Non-Kohler-authorized repair shop labor without prior approval from Kohler Co. Warranty Department.
14. Engine fluids such as fuel, oil, or coolant/antifreeze.
15. Shop supplies such as adhesives, cleaning solvents, and rags.
16. Expenses incurred investigating performance complaints unless the problem is caused by defective Kohler materials or workmanship.
17. Maintenance items such as fuses, lamps, filters, spark plugs, loose or leaking clamps, and adjustments.
18. Travel time and mileage exceeding 300 miles round trip.

To obtain warranty service, call 1-800-544-2444 for your nearest authorized Kohler service representative or write Kohler Co., Service Department, MS072, Kohler, WI 53044 USA.

KOHLER CO. SHALL NOT BE LIABLE FOR SPECIAL, INCIDENTAL, AND/OR CONSEQUENTIAL DAMAGES OF ANY KIND including, but not limited to, incidental and/or consequential labor costs, installation charges, telephone charges, or transportation charges in connection with the replacement or repair of defective parts.

This is our exclusive written warranty. We make no other express warranty nor is anyone authorized to make any on our behalf.

ANY IMPLIED OR STATUTORY WARRANTY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, IS EXPRESSLY LIMITED TO THE DURATION OF THIS WARRANTY. Some states do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental and/or consequential damages, so the above limitation or exclusion may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

KOHLER®

KOHLER CO., Kohler, Wisconsin 53044
Phone 920-457-4441, Fax 920-459-1646
For the nearest sales/service outlet in the
US and Canada, phone 1-800-544-2444
KOHLERPower.com

TP-5374 12/15f

Stationary Standby Industrial Generator Set Extended Five-Year or Three Thousand (3000)-Hour Comprehensive Limited Warranty

Your Kohler product has been manufactured and inspected with care by experienced craftsmen. If you are the original end user, Kohler Co. warrants, for the period indicated below, each product to be free from defects in materials and workmanship. In the event of a defect in materials or workmanship, Kohler Co. will repair, replace, or make appropriate adjustment at Kohler Co.'s option if the product, upon Kohler Co.'s inspection, is found to be properly installed, maintained, and operated in accordance with Kohler Co.'s instruction manuals. A Kohler distributor, dealer, or authorized service representative must perform startup.

Kohler Product

Stationary Standby Generator Set & Accessories

Warranty Coverage

Five (5) years from registered startup or three thousand (3000) hours (whichever occurs first).

This warranty is effective only upon Kohler Co.'s receipt of an extended warranty registration form and warranty fee within one year of registered startup. The comprehensive limited warranty start date is determined by the standard limited warranty requirements and runs concurrent with the standard limited warranty during the first year. To receive extended comprehensive limited warranty coverage, the provisions of the standard limited warranty registration must be met.

The following will **not** be covered by the warranty:

1. Normal wear, routine tuneups, tuneup parts, adjustments, and periodic service.
2. Damage, including but not limited to damage caused by accidents, improper installation or handling, faulty repairs not performed by an authorized Kohler service representative, improper storage, or acts of God.
3. Damage caused by operation at speeds, or with fuel, loads, conditions, modifications or installation contrary to published specifications.
4. Damage caused by negligent maintenance such as:
 - a. Failure to provide the specified type and sufficient quantity of lubricating oil.
 - b. Failure to keep the air intake and cooling fin areas clean.
 - c. Failure to service the air cleaner.
 - d. Failure to provide sufficient coolant and/or cooling air.
 - e. Failure to perform scheduled maintenance as prescribed in supplied manuals.
 - f. Failure to regularly exercise the generator set under load (stationary applications only).
5. Original installation charges and startup costs.
6. Starting batteries and the following related expenses:
 - a. Labor charges related to battery service.
 - b. Travel expenses related to battery service.
7. Engine coolant heaters, heater controls, and circulating pumps after the first year of the warranty period.
8. Additional expenses for repairs performed after normal business hours, i.e. overtime or holiday labor rates.
9. Rental of equipment during the performance of warranty repairs.
10. Removal and replacement of non-Kohler-supplied options and equipment.
11. Non-Kohler replacement parts. Replacement of a failed Kohler part with a non-Kohler part voids the warranty on that part.
12. Radiators replaced rather than repaired.
13. Fuel injection pumps not repaired by an authorized Kohler service representative.
14. Non-Kohler-authorized repair shop labor without prior approval from Kohler Co. Warranty Department.
15. Engine fluids such as fuel, oil, or coolant/antifreeze.
16. Shop supplies such as adhesives, cleaning solvents, and rags.
17. Expenses incurred investigating performance complaints unless the problem is caused by defective Kohler materials or workmanship.
18. Maintenance items such as fuses, lamps, filters, spark plugs, loose or leaking clamps, and adjustments.
19. Travel time and mileage exceeding 300 miles round trip.

To obtain warranty service, call 1-800-544-2444 for your nearest authorized Kohler service representative or write Kohler Co., Service Department, MS072, Kohler, WI 53044 USA.

KOHLER CO. SHALL NOT BE LIABLE FOR SPECIAL, INCIDENTAL, AND/OR CONSEQUENTIAL DAMAGES OF ANY KIND including, but not limited to, incidental and/or consequential labor costs, installation charges, telephone charges, or transportation charges in connection with the replacement or repair of defective parts.

This is our exclusive written warranty. We make no other express warranty nor is anyone authorized to make any on our behalf.

ANY IMPLIED OR STATUTORY WARRANTY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, IS EXPRESSLY LIMITED TO THE DURATION OF THIS WARRANTY. Some states do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of incidental and/or consequential damages, so the above limitation or exclusion may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

KOHLER®

KOHLER CO., Kohler, Wisconsin 53044
Phone 920-457-4441, Fax 920-459-1646
For the nearest sales/service outlet in the
US and Canada, phone 1-800-544-2444
KOHLERPower.com

TP-5561 8/16f



Certification

Certificate of Registration

QUALITY MANAGEMENT SYSTEM - ISO 9001:2015

This is to certify that:

Kohler Power Systems
N7650 Lakeshore Road
Sheboygan
Wisconsin
53083
USA


Holds Certificate No:

FM 727336

and operates a Quality Management System which complies with the requirements of ISO 9001:2015 for the following scope:

Design, manufacture, and distributor support for electrical generators, alternators, fuel tanks, automatic transfer switches and switchgear.

For and on behalf of BSI:


Carlos Pitanga, Chief Operating Officer Assurance – Americas

Original Registration Date: 1995-02-28

Latest Revision Date: 2021-10-29

Effective Date: 2021-11-07

Expiry Date: 2024-11-06

Page: 1 of 2



...making excellence a habit.™

Certificate No: **FM 727336**

Location	Registered Activities
Kohler Power Systems - GK 900 Highland Drive Bldg 604 Kohler Wisconsin 53004 USA	Manufacture of leads and harness, automatic transfer switches and switchgear. Distribution of generator sets.
Kohler Power Systems N7650 Lakeshore Road Sheboygan Wisconsin 53083 USA	Design, manufacture, and distributor support for electrical generators, automatic transfer switches and switchgear.
Kohler Power Systems 300 N Dekora Woods Blvd Saukville Wisconsin 53080 USA	Manufacture of fuel tanks, skids, fabricated components and generators.
Kohler Power Systems Muth Warehouse 2821 Muth Court Sheboygan Wisconsin 53083 USA	The distribution of generator sets.
Kohler Power Systems KWIP Warehouse 4327 County EE Sheboygan Wisconsin 53081 USA	Receiving, sequencing and warehousing of generator components.

Original Registration Date: 1995-02-28

Latest Revision Date: 2021-10-29

Effective Date: 2021-11-07

Expiry Date: 2024-11-06

Page: 2 of 2

This certificate remains the property of BSI and shall be returned immediately upon request.

An electronic certificate can be authenticated [online](https://www.bsigroup.com/ClientDirectory). Printed copies can be validated at www.bsigroup.com/ClientDirectory. To be read in conjunction with the scope above or the attached appendix.

Information and Contact: BSI, Kitemark Court, Davy Avenue, Knowlhill, Milton Keynes MK5 8PR. Tel: + 44 345 080 9000
BSI Assurance UK Limited, registered in England under number 7805321 at 389 Chiswick High Road, London W4 4AL, UK.
A Member of the BSI Group of Companies.

G15-152 10/21

PROTOTYPE TEST REPORT



Models Covered: **230, 250, 275REOZJE**
Model Tested: **275REOZJE**
Cooling System Tested: **50C**

Alternator Tested: **4UA10**
Engine Tested: **6090HF484**
Voltage Tested: **208V**

GENSET

Maximum power test to assure that the prime mover and alternator have sufficient capacity to operate within specifications.

Meets Rated Load

Steady-state load test to ensure voltage stability meets or exceeds ISO8528-5 requirements and to verify compliance with steady state speed control specifications.

± 0.25 % Frequency Band

± 0.50 % Voltage Deviation

Transient load tests per NEMA MG1-32.18, and ISO 8528 to verify specifications of transient voltage regulation, voltage dip, voltage overshoot, recovery voltage, and recovery time. Values shown for model tested above. Please contact factory for additional details.

Full Load Acceptance

43.7 % Voltage Dip

2.90 Seconds of Recovery Time

26.5 % Frequency Dip

3.40 Seconds of Recovery Time

Full Load Rejection

32.1 % Voltage Overshoot

3.40 Seconds of Recovery Time

4.30 % Frequency Overshoot

0.50 Seconds of Recovery Time

G2 ISO8528-5 Class (G1, G2, G3)

NFPA 110 one step testing to determine the amount of time required for the generator set to reach 90% voltage and frequency to allow the ATS to transfer.

Complies with NFPA 110 Type 10

Vibrational analysis to verify that generator vibrations are within acceptable limits per ISO 8528-9.

Complies

Torsional analysis data to verify torsional effects are not detrimental and that the generator set will provide dependable service as specified.

Complies

Generator set cooling and air flow tests to verify maximum operating ambient temperature. (Cooling system test results are available on TIB-118)

Acoustical noise intensity and sound attenuation effects tests (Acoustical noise results are available on TIB-114 & 115)

Exhaust Back Pressure test completed to demonstrate within engine limitation (Exhaust back pressure test results are available on TIB-119)

PROTOTYPE TEST REPORT



Models Covered: **230, 250, 275REOZJE**
Model Tested: **275REOZJE**
Cooling System Tested: **50C**

Alternator Tested: **4UA10**
Engine Tested: **6090HF484**
Voltage Tested: **208V**

ALTERNATOR

Alternator temperature rise test per NEMA MG1-32.6. Standby and prime ratings of the alternator are established during this test.

Alternator overload test per NEMA MG1-32.8. Motor starting tests per NEMA MG1-32.18.5 to evaluate capabilities of generator, exciter, and regulator system.

Three-phase symmetrical short-circuit test per NEMA MG1-32.13 to demonstrate short circuit performance, mechanical integrity, ability to sustain short-circuit current.

Harmonic analysis, voltage waveform deviation per NEMA MG1-32.10 to confirm that the generator set is producing clean voltage within acceptable limits.

(Alternator detailed test results are available on TIB-102)

Kohler Standby/Prime Generator Set Test Program

Testing is an integral part of quality assurance. In keeping with our uncompromising commitment to quality, safety, and reliability, every Kohler Standby/Prime power generator set undergoes an extensive series of prototype and production testing.

Prototype Testing

Prototype testing includes the potentially destructive tests necessary to verify design, proper function of protective devices and safety features, and reliability expectations. Kohler's prototype testing includes the following:

- Alternator temperature rise test per NEMA MG1-32.6. Standby and prime ratings of the alternator are established during this test.
- Maximum power test to assure that the prime mover and alternator have sufficient capacity to operate within specifications.
- Alternator overload test per NEMA MG1-32.8.
- Steady-state load test to ensure voltage regulation meets or exceeds ANSI C84.1, NEMA MG1-32.17 requirements and to verify compliance with steady-state speed control specifications.
- Transient test to verify speed controls meets or exceeds specifications.
- Transient load tests per NEMA MG1-32.18, and ISO 8528 to verify specifications of transient voltage regulation, voltage dip, voltage overshoot, recovery voltage, and recovery time.
- Motor starting tests per NEMA MG1-32.18.5 to evaluate capabilities of generator, exciter, and regulator system.
- Three-phase symmetrical short-circuit test per NEMA MG1-32.13 to demonstrate short circuit performance, mechanical integrity, ability to sustain short-circuit current.
- Harmonic analysis, voltage waveform deviation per NEMA MG1-32.10 to confirm that the generator set is producing clean voltage within acceptable limits.

Torsional analysis data, to verify torsional effects are not detrimental and that the generator set will provide dependable service as specified, is available upon request.

Kohler offers other testing at the customer's request at an additional charge. These optional tests include power factor testing, customized load testing for specific application, witness testing, and a broad range of MIL-STD-705c testing. A certified test report is also available at an additional charge.

- Generator set cooling and air flow tests to verify maximum operating ambient temperature.
- Reliability tests to demonstrate product durability, followed by root cause analysis of discovered failures and defects. Corrective action is taken to improve the design, workmanship, or components.
- Acoustical noise intensity and sound attenuation effects tests.

Production Testing

In production, Kohler Standby/Prime generator sets are built to the stringent standards established by the prototype program. Every Kohler generator set is fully tested prior to leaving the factory. Production testing includes the following:

- Stator and exciter winding high-potential test on all generators. Surge transient tests on stators for generators 180 kW or larger. Continuity and balance tests on all rotors.
- One-step, full-load pickup tests to verify that the performance of each generator set, regulator, and governor meets published specifications.
- Regulation and stability of voltage and frequency are tested and verified at no load, 1/4 load, 1/2 load, 3/4 load, and full-rated load.
- Voltage, amperage, frequency and power output ratings verified by full-load test.
- The proper operation of controller logic circuitry, prealarm warnings, and shutdown functions is tested and verified.
- Any defect or variation from specification discovered during testing is corrected and retested prior to approval for shipment to the customer.

KOHLER®

KOHLER CO. Kohler, Wisconsin 53044
Phone 920-565-3381, Fax 920-459-1646
For the nearest sales/service outlet in the
US and Canada, phone 1-800-544-2444
KohlerPowerSystems.com



PreStartup Checklist

Generator Set/Transfer Switch Installation Checklist

This document has generic content and some items may not apply to some applications. Check only the items that apply to the specific application. Read and understand all of the safety precautions found in the Operation and Installation Manuals. Make the following installation checks before performing the Startup Checklist.

Note: Use this form as a general guide, along with any applicable codes or standards. Comply with all applicable codes and standards. Improper installation voids the warranty.

Equipment Room or Weather Housing		Does Not Apply	
	Yes	No	Apply
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1.	Is the equipment installed in a fire-resistant room (made of non-combustible material) or in an outdoor weather housing?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
2.	Is there adequate clearance between the engine and floor for service maintenance?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3.	Is there emergency lighting available at the equipment room or weather housing?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
4.	Is there adequate heating for the equipment room or outdoor weather housing?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5.	Is the equipment room clean with all materials not related to the emergency power supply system removed?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
6.	Is the equipment room protected with a fire protection system?		
Engine and Mounting			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
7.	Is the mounting surface(s) properly constructed and leveled?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
8.	Is the mounting surface made from non-combustible material?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
9.	Was the generator-to-engine alignment performed after attaching the skid to the mounting base? Generator sets with two-bearing generators require alignment.		
Lubrication			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10.	Is the engine crankcase filled with the specified oil?		
Cooling and Ventilation			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
11.	Is the cooling system filled with the manufacturer's specified coolant/antifreeze and purged of air?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
12.	Is there adequate inlet and outlet air flow (electric louvers adjusted and ventilation fan motor(s) connected to the corresponding voltage)?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
13.	Is the radiator duct properly sized and connected to the air vent or louver?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
14.	Are flexible sections installed in the cooling water lines?		
Fuel			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
15.	Is there an adequate/dedicated fuel supply?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
16.	Are the fuel filters installed?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
17.	Are the fuel tanks and piping installed in accordance with applicable codes and standards?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
18.	Is there adequate fuel transfer tank pump lift capacity and is the pump motor connected to the corresponding voltage?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
19.	Is the fuel transfer tank pump connected to the emergency power source?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
20.	Are flexible fuel lines installed between the engine fuel inlet and fuel piping?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
21.	Is the specified gas pressure available at the fuel regulator inlet?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
22.	Does the gas solenoid valve function?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
23.	Are the manually operated fuel and cooling water valves installed allowing manual operation or bypass of the solenoid valves?		
Exhaust			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
24.	Is the exhaust line sized per guidelines and does it have flexible connector(s)? Is the flexible connector(s) straight?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
25.	Is there an exhaust line condensate trap with a drain installed?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
26.	Is the specified silencer installed and are the hanger and mounting hardware tightened?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
27.	Is a heat-insulating thimble(s) installed at points where exhaust lines pass through combustible wall(s) or partition(s)?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
28.	Is the exhaust line free of excessive bends and restrictions? Is the backpressure within specifications?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
29.	Is the exhaust line installed with a downward pitch toward the outside of the building?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
30.	Is the exhaust line protected from entry by rain, snow, and animals?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
31.	Does the exhaust system outlet location prevent entry of exhaust gases into buildings or structures?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
32.	Are individuals protected from exposure to high temperature exhaust parts and are hot parts safety decals present?		
AC Electrical System			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
33.	Does the nameplate voltage/frequency of the generator set and transfer switch match normal/utility source ratings?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
34.	Do the generator set load conductors have adequate ampacity and are they correctly connected to the circuit breakers and/or the emergency side of the transfer switch?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
35.	Are the load conductors, engine starting cables, battery charger cables, and remote annunciator leads installed in separate conduits?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
36.	Is the battery charger AC circuit connected to the corresponding voltage?		
Transfer Switch, Remote Control System, Accessories			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
37.	Is the transfer switch mechanism free of binding? Note: Disconnect all AC sources and operate the transfer switch manually.		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
38.	Are the transfer switch AC conductors correctly connected? Verify lead designations using the appropriate wiring diagrams.		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
39.	Is all other wiring connected, as required?		
Batteries and DC Electrical System			
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
40.	Does the battery(ies) have the specified CCA rating and voltage?		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
41.	Is the battery(ies) filled with electrolyte and connected to the battery charger?	</	

Generator Set/Transfer Switch Startup Checklist

This document has generic content and some items may not apply to some applications. Check only the items that apply to the specific application. Read and understand all of the safety precautions found in the Operation and Installation Manuals. Complete the Installation Checklist before performing the initial startup checks. Refer to Service Bulletin 616 for Warranty Startup Procedure Requirements regarding generator set models with ECM-controlled engines.

Does Not Yes Apply	Does Not Yes Apply	Does Not Yes Apply	Does Not Yes Apply	
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	1. Verify that the engine is filled with oil and the cooling system is filled with coolant/antifreeze.	<input type="checkbox"/> <input type="checkbox"/>	29. Close the normal source circuit breaker or replace fuses to the transfer switch.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	2. Prime the fuel system.	<input type="checkbox"/> <input type="checkbox"/>	30. Check the normal source voltage, frequency, and phase sequence on three-phase models. The normal source must match the load.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	3. Open all water and fuel valves. Temporarily remove the radiator cap to eliminate air in the cooling system. Replace radiator cap in step 21.	<input type="checkbox"/> <input type="checkbox"/>	31. Open the normal source circuit breaker or remove fuses to the transfer switch.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	4. Place the generator set master switch in the OFF/RESET position. Observe Not-in-Auto lamp and alarm, if equipped, on the controller.	<input type="checkbox"/> <input type="checkbox"/>	32. Manually transfer the load to the normal source.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	5. Press the lamp test, if equipped on controller. Do all the alarm lamps on the panel illuminate?	<input type="checkbox"/> <input type="checkbox"/>	33. Close the generator set main line circuit breakers, close the safeguard breaker, and/or replace the fuses connected to the transfer switch.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	6. Open the main line circuit breakers, open the safeguard breaker, and/or remove fuses connected to the generator set output leads.	<input type="checkbox"/> <input type="checkbox"/>	34. Place the generator set master switch in the RUN position.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	7. Turn down the speed control (electronic governor) or speed screw (mechanical governor).*	<input type="checkbox"/> <input type="checkbox"/>	35. Check the generator set voltage, frequency, and phase sequence on three-phase models. The generator set must match normal source and load.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	8. Verify the presence of lube oil in the turbocharger, if equipped. See the engine and/or generator set operation manual.	<input type="checkbox"/> <input type="checkbox"/>	36. Place the generator set master switch in the OFF/RESET position.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	9. Place the generator set master switch in the RUN position. Allow the engine to start and run for several seconds.	<input type="checkbox"/> <input type="checkbox"/>	37. Open the generator set main line circuit breakers, open the safeguard breaker, and/or remove the fuses connected to the transfer switch.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	10. Verify that the day tank, if equipped, is energized.	<input type="checkbox"/> <input type="checkbox"/>	38. Reconnect the power switching device and logic controller wire harness at the inline disconnect plug at the transfer switch.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	11. Place the generator set master switch in the OFF/RESET position. Check for oil, coolant, and exhaust leaks.	<input type="checkbox"/> <input type="checkbox"/>	39. Close the normal source circuit breaker or replace fuses to the transfer switch. Place the generator set master switch to the AUTO position.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	12. Turn on the water/oil heaters and fuel lift pumps.	<input type="checkbox"/> <input type="checkbox"/>	40. Close the generator set main line circuit breakers, close the safeguard breaker, and/or replace the fuses connected to the transfer switch.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	13. Check the battery charger ammeter for battery charging indication.	<input type="checkbox"/> <input type="checkbox"/>	41. Place the transfer switch in the TEST position (load test or open normal source circuit breaker). NOTE: Obtain permission from the building authority before proceeding. This procedure tests transfer switch operation and connects building load to generator set power.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	14. Place the generator set master switch in the RUN position. Verify whether there is sufficient oil pressure. Check for oil, coolant, and exhaust leaks.	<input type="checkbox"/> <input type="checkbox"/>	42. Readjust frequency to 50 or 60 Hz with total building loads.*
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	15. Close the safeguard circuit breaker. Adjust the engine speed to 50/60 Hz if equipped with an electronic governor or to 52.8/63 Hz if equipped with a mechanical governor.*	<input type="checkbox"/> <input type="checkbox"/>	43. Verify that the current phase is balanced for three phase systems.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	16. If the speed is unstable, adjust according to the appropriate engine and/or governor manual.*	<input type="checkbox"/> <input type="checkbox"/>	44. Release the transfer switch test switch or close the normal circuit breaker. The transfer switch should retransfer to the normal source after appropriate time delay(s).
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	17. Adjust the AC output voltage to match the load voltage using the voltage adjusting control. See the generator set/controller operation manual.	<input type="checkbox"/> <input type="checkbox"/>	45. Allow the generator set to run and shut down automatically after the appropriate cool down time delay(s).
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	18. Allow the engine to reach normal operating coolant temperature.	<input type="checkbox"/> <input type="checkbox"/>	46. Set the plant exerciser to the customer's required exercise period, if equipped.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	19. Check the operating temperature on city water-cooled models and adjust the thermostatic valve as necessary.	<input type="checkbox"/> <input type="checkbox"/>	47. Verify that all options on the transfer switch are adjusted and functional for the customer's requirements.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	20. Manually overspeed the engine to cause an engine shutdown (68-70 Hz on 60 Hz models and 58-60 Hz on 50 Hz models). Place the generator set master switch in the OFF/RESET position.*	<input type="checkbox"/> <input type="checkbox"/>	48. If possible, run the building loads on the generator set for several hours or perform the load bank test if required.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	21. Check the coolant level, add coolant as necessary, and replace the radiator cap. Verify that all hose clamps are tight and secure.	<input type="checkbox"/> <input type="checkbox"/>	49. Verify that all the wire connections from the generator set to the transfer switch and optional accessories are tight and secure.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	22. Place the generator set master switch in the RUN position.	<input type="checkbox"/> <input type="checkbox"/>	50. Verify that the customer has the appropriate engine/generator set and transfer switch literature. Instruct the customer in the operation and maintenance of the power system.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	23. Verify the engine low oil pressure and high coolant temperature shutdowns.*	<input type="checkbox"/> <input type="checkbox"/>	51. Fill out the startup notification at this time and send the white copy to the Generator Warranty Dept. Include the warranty form if applicable.
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	24. Check the overcrank shutdown.*		
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	25. Place the generator set master switch in the OFF/RESET position.		
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	26. Open the normal source circuit breaker or remove fuses to the transfer switch.		
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	27. Disconnect the power switching device and logic controller wire harness at the inline disconnect plug at the transfer switch.		
<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	28. Manually transfer the load to the emergency source.		

* Some models with an Engine Electronic Control Module (ECM) may limit or prohibit adjusting the engine speed or testing shutdowns. Refer to appropriate documentation available from the manufacturer.