



# HIPOWER®

your partner for power

## INDUSTRIAL Diesel Generator

### Model: HJW 130 T6U

## John Deere UL 2200 Series

## Specification & Application Data



Generator depicted with sound attenuated option, some accessories for display only.

### 60Hz Power Ratings kW (kVA)

\* Prime power rating for reference only.

| Voltage VAC   | Phase | PF  | Standby |     | Prime * |     |
|---------------|-------|-----|---------|-----|---------|-----|
|               |       |     | kW      | kVA | kW      | kVA |
| 120/240       | 1     | 1   | 79      | 99  | 71      | 89  |
| 120/208       | 3     | 0.8 | 129     | 161 | 116     | 145 |
| 120/240 Delta | 3     | 0.8 | 129     | 161 | 116     | 145 |
| 277/480       | 3     | 0.8 | 129     | 161 | 116     | 145 |
| 347/600 **    | 3     | 0.8 | 124     | 155 | 111     | 139 |

**Rating Definitions:** (N/A = Not available for model designated)

Standby - All Industrial Sets are Standby Rated, applicable for a varying emergency load for the duration of a utility power outage with no overload capability. Alternator winding temperature rise is 120° C.

Prime - Prime rating is applicable for supplying power to a varying load in lieu of utility for an unlimited amount of running time. (Max. load factor = 80%) A 10% overload capacity is available for 1 out of every 12 hours.

\*\* 600 Volt configuration not available as UL2200 certified generator set.

### Overview of the HIPOWER® John Deere series of Industrial Generator Sets:

HIPOWER® Industrial generators are factory-built in facilities that utilize the latest technology in sheet metal fabrication, mechanical and electrical component assembly, production and testing.

Each model is the result of computer aided design and modeling backed up by exhaustive prototype-testing. Our development technology results in a unique range of innovative designs for highly reliable generator sets backed-up by a limited warranty covering all components.

### Standard Configuration of Industrial Sets:

- **John Deere Diesel Engine:** Long-life, heavy-duty, 4-cycle, direct injection engine from a world renowned manufacturer for economy of operation and maximum reliability and durability. Capable of full rated load acceptance in one step.
- **Cooling:** Radiator with belt driven pusher fan.
- **Filtration:** Heavy duty replaceable element air-cleaner
- **Alternator:** Single bearing, 4-pole, rotating field, self-excited, self-ventilated, 12-wire re-connectable, 60Hz brushless alternator with Class H insulation. Automatic voltage regulator (AVR) providing close voltage regulation.
- **Certification:** Generator set is UL2200 and CSA certified and meets ISO 8528-5.
- **Arrangement:** Open skid with engine and alternator units closed coupled together and with resilient anti-vibration isolators mounted between the assembly and a heavy-duty steel base. The sturdy base frame has openings allowing for winching, slinging and lifting.
- **Auto Start Control Panel:** Digital auto-start microprocessor based control panel with remote start capability.
- **Starting System:** 12 volt starter motor, battery cables, battery and belt driven charging alternator.

### Standard Features of Industrial Sets:

- HIPOWER® is a single source for all the generator system
- Generators are produced in a facility dedicated to generator set manufacture
- The generator set can accept rated load in one step
- 2 years or 1000 hours limited warranty given as standard. Extended warranties offered as options to the standard
- Base set meets NFPA 110, Level 1, when accessorized with the required equipment and installed per NFPA standards
- Test certificates available for the fully factory tested industrial generator sets
- HIPOWER® generator sets are designed to fit a full range of options for complying with many diverse applications
- Full range of safety features to ensure full protection of the generator system. (See back-page for details).



### Industrial Generator Set Specification:

|   |   |
|---|---|
| Governor regulation class                 | ISO 8528 Part 1 Class G3  |
| Voltage regulation, no load to full load  | +/- 1%  |
| Frequency regulation                      | Isochronous   |
| Radio frequency emissions compliance      | Meets requirements of most industrial and commercial applications |
| skVA@30% voltage dip (480 volts)          | 520A (480V) - 490A (600V)   |
| Main Line Circuit breaker – amps capacity | 600A (208V) - 400A (240V) - 200A (480V - 600V)                    |

### Engine Specification:

|  |                                |
|--|--------------------------------|
| Manufacturer   | John Deere                     |
| Model  | 4045HF285-147                  |
| EPA certified  | Tier 3                         |
| Crankshaft speed   | 1,800 rpm                      |
| Type   | Diesel, 4-stroke               |
| Injection  | Unit injection                 |
| Aspiration   | Turbocharged                   |
| Number of Cylinders  | 4                              |
| Cylinder arrangement   | In-line                        |
| Displacement CID (liters)                                    | 275 (4.5)                      |
| Bore and Stroke inches (mm)                                  | 4.19 X 5.00 (106 X 127)        |
| Nominal power  | 197.0 hp                       |
| Cooling  | Liquid                         |
| Governor   | Electrical                     |
| Starting motor & alternator                                  | 12 volt                        |
| Compression ratio  | 19.0:1                         |
| Air cleaner type   | Medium duty - double cartridge |
| Exhaust gas flow cu. ft./minute (cu. /minute)                | 953 (27.0)                     |
| Max. Exhaust temp at full load degrees °F (°C)               | 1076 (580)                     |
| Max. permissible back pressure - ins H <sub>2</sub> O (kPA ) | 30.0 (7.5)                     |

### Cooling System:

|   |               |
|---|---------------|
| Engine cooling air flow - cu. ft./second (cu. m/second)   | 166.8 (4.7)   |
| Alternator cooling flow - cu. ft./second (cu. m/second)   | 21.79 (0.61)  |
| Total cooling air flow (engine + alternator + combustion) | 194.27 (5.50) |
| Total cooling capacity - US gallons (liters)              | 7.0 (26.7)    |

### Lubrication system:

|  |                                     |
|--|-------------------------------------|
| Oil pan capacity - US gallons (liters)             | 3.17 (12.00)                        |
| Oil pan capacity with filter - US gallons (liters) | 3.96 (15.00)                        |
| Oil cooler   | Water cooled                        |
| Recommended lubricating oil grade                  | SAE 15W-40 or API CI-4 PLUS or CI-4 |
| Oil consumption at full load                       | less than 0.1% of fuel consumption  |
| Oil pressure – psi (kPA)                           | 46 (320)                            |

### Engine Electrical System:

|                              |              |
|------------------------------|--------------|
| Starting motor voltage       | 12 volt      |
| Battery capacity             | 180 amps     |
| Cold Cranking Amps - minimum | 800 amps     |
| Alternator charger           | 14V - 75 AMP |

## Fuel System:

|                                     |            |
|-------------------------------------|------------|
| Recommended fuel                    | # 2 - ULSD |
| Fuel supply line, min. ID mm(in.)   | 11 (0.44)  |
| Fuel return line, min. ID, mm (in.) | 6 (0.24)   |
| Max. lift, fuel pump, type, m (ft)  | 1.83 (6.0) |
| Fuel filter                         | 2µm        |

## Fuel consumption:

|                             | Standby Power Rating | Prime Power Rating |
|-----------------------------|----------------------|--------------------|
| 100% load – US gallons/hour | 9.2                  | 8.28               |
| 75% load - US gallons/hour  | 7.1                  | 6.21               |
| 50% load - US gallons/hour  | 5.1                  | 4.66               |
| 25% load - US gallons/hour  | 2.8                  | 3.49               |

## Alternator Specification:

|   |  |
|---|--|
| Manufacturer                              | Stamford   |
| Model                                     | UCI 274 F (WDG 311) - UCI 274 D (WDG 17)                 |
| Voltages                                  | 120/208V (WDG311) - 277/480V (WDG311) - 347/600V (WDG17) |
| Alternator Type                           | Four pole, rotating field                                |
| Excitation System                         | Brushless self-exciting with AVR SX 460                  |
| Power factor                              | 0.8  |
| Number of leads                           | 12 leads, reconnectable                                  |
| Stator Pitch                              | 2/3  |
| Insulation                                | Class H  |
| Windings – Temperature Rise               | 150° C   |
| Enclosure (IEC-34-S)                      | IP23   |
| Bearing                                   | Single, sealed   |
| Coupling                                  | Flexible disc  |
| Amortisseur windings                      | Full   |
| Voltage regulation – no load to full load | ± 1%   |
| TIF                                       | <50  |
| Line harmonics                            | 5% maximum   |

## Standard Features: *(see back-page for control panel details)*


|  |   |
|--|---|
| ● Radiator with pusher fan                                     | ● Standard fuel filter  |
| ● Medium - duty, two-stage dry element                         | ● All rotating components (i.e. fan) protected with metal guards  |
| ● Heavy-duty engine start batteries in rack with cables        | ● All hot components (i.e. exhaust) protected with metal guards   |
| ● External emergency stop switch                               | ● Ground connection prepared for ground spike (not supplied)      |
| ● Control Panel DSE 7310 (See over for details)                | ● Main line ABB UL listed circuit breaker for overload protection |
| ● Oil drain extension  | ● Operation and installation literature                           |
| ● Steel base for mounting on fuel tank and/or concrete surface | ● CSA/UL certified  |

## Available Options:

|  |   |
|--|---|
| <input type="checkbox"/> Sound attenuated canopy with rock-wool insulation, silencer, rounded corners for rigidity and weather protection & stainless steel fixtures |   |
| <input type="checkbox"/> Electric actuator & louvers for air intake and exhaust (for above)  | <input type="checkbox"/> Alternator anti-condensation heaters                                 |
| <input type="checkbox"/> Residential silencer -35dBA (for open skid only)  | <input type="checkbox"/> Murphy oil make-up tank 2 or 4 gallon                                |
| <b>Fuel Tank Options:</b>  | <input type="checkbox"/> 24-hr UL142 <input type="checkbox"/> 48-hr UL142                     |
| <input type="checkbox"/> Remote annunciator  | <input type="checkbox"/> Static battery charger 6A or 10A UL                                  |
| <input type="checkbox"/> Engine block heater   | <input type="checkbox"/> Control panel heater   |
| <input type="checkbox"/> Radiator/Duct Mounted Load Bank - 30% of generator power  | <input type="checkbox"/> Battery blanket  |
| <input type="checkbox"/> PMG AVR for Stamford Alternator only  |   |
| <b>Auto Transfer Switch (ATS) Options:</b>   | <input type="checkbox"/> Open transition ATS <input type="checkbox"/> Closed transition ATS   |
|  | <input type="checkbox"/> Delayed transition ATS <input type="checkbox"/> Service entrance ATS |

**HIPOWER DSE 7310 Control Panel:** HIPOWER's auto-start control panel DSE 7310 is supplied by Deep Sea Electronics with a manual or auto start selection switch with push button reset. Displays with indication of: phase to neutral voltage, voltage between phases, current (amps) per phase, frequency, power factor, kW and kVA outputs, fuel level, engine speed, hours run, battery voltage and battery charge voltage.

**Engine and generator alarms for:** battery charge failure, emergency stop activated, over-speed, under-speed, low oil pressure, high coolant temperature, low coolant level, low fuel level, overload, unbalanced voltage, over and under voltage, over frequency, short circuit, inverse power and incorrect phase sequence. All protections are programmable to: Warning alarm without engine shutdown or alarm with engine

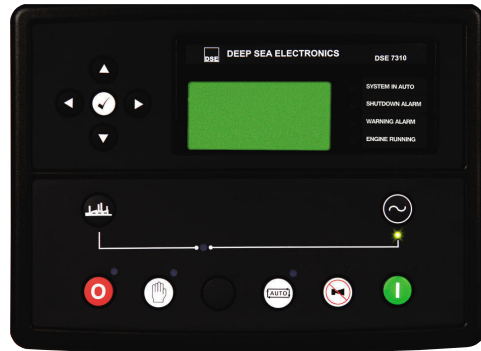

shutdown, with or without cooling period. Warning alarms for: low fuel level, battery voltage failure and battery charging alternator failure


**Alternator alarms included:** Overload, unbalanced voltage, over voltage, under voltage, over frequency, under frequency, short circuit, reverse power, and incorrect phase sequence.



Pictures of Control Panel RH and Distribution Panel LH may include optional equipment and/or accessories

Model HJW 130 T6U Enclosed Set

key dimensions and sound levels

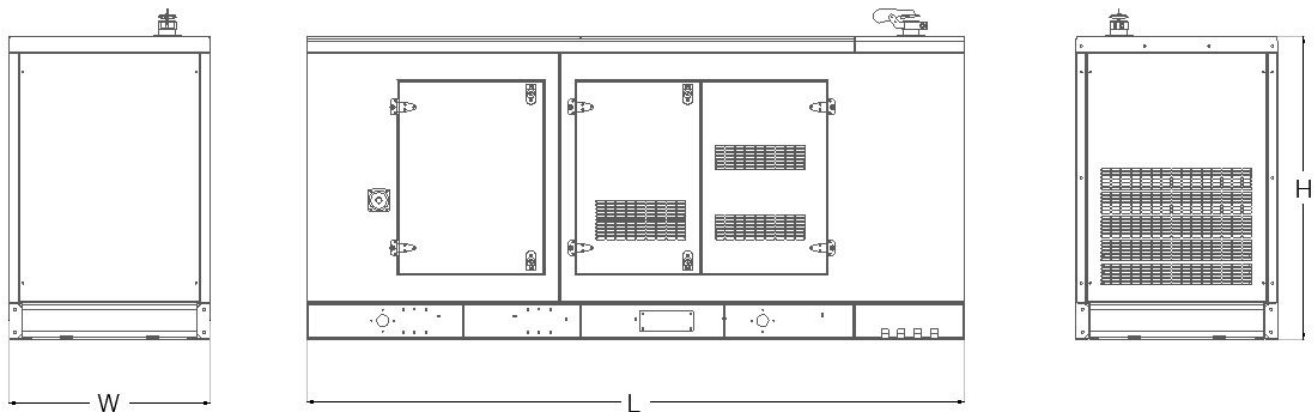

| Configuration             | Fuel Tank Data (base option) |                 | Generator Data * |           |            |            |     |
|---------------------------|------------------------------|-----------------|------------------|-----------|------------|------------|-----|
|                           | Run Time Hours               | Capacity (Gals) | L = Length       | W = Width | H = Height | Weight lbs | dBa |
| Enclosed Set (as diagram) | TBA                          | TBA             | 141.3"           | 43.3"     | 65"        | 5450       | 72  |
| Open Set (not shown)      | TBA                          | TBA             | 96.5"            | 30.7"     | 64.3"      | 3710       | TBA |

\* All measurements are approximate and for estimation purposes only. Weights are without fuel tank. Sound levels measured at 23ft (7m) and does not account for ambient site conditions.

Codes and Standards Compliances used where applicable



Renting. So smart, so easy.



- NFPA 99
- NFPA 110
- ISO 8528-5
- ISO 1708A.5
- ISO 3046
- NEMA ICS 1
- DIN6271
- SAE J1349
- BS5514
- IEE C62.41 TESTING

your partner for power™

© 2012 HIPOWER® Systems Inc. All rights reserved. HIPOWER® is a registered trademarks of Himoina Power Systems, Inc.. HIMOINSA® is a registered trademark of Himoina SL. Other company, product, or services names may be trademarks or service mark of others. Specifications are subject to change without notice.

**HIPOWER®**  
your partner for power

Ref# 666-10190-August 2015