4000A ATS Submittal

SWITCH SUBMITTAL

REVISION 1

James Moss
Sales Representative
james.moss@ascopower.com

4000A ATS Submittal

Reference Quote: B3-26-804221-1-1
Sales Order: N/A

TRANSFER SWITCH DETAILS									
ATS NAME	QTY	AMPS / POLES (VOLTS)	BYPASS	TRANSITION TYPE	CATALOG NUMBER	ACCESSORIES	OUTLINE DRAWING	WIRING DIAGRAM	BOM NUMBER
	1	4000 / 4 (480V)	N/A	OPEN	G07ATSB34000N5XM	6DL,31BG,44G	844459-002	844627-123	1654666

Transfer Switch Withstand and Closing Ratings																						
				300, 4000 & 7000 Series																		
ATS NAME	FRAME SIZE	SWITCH RATING AMPS		CURRENT LIMITING FUSES				SPECIFIC BREAKER			TIME BASED				Short Time Ratings[3] (sec)							
															480V Max.				600V Max.			
		Transfer Switches	Bypass Switches	480V Max.	600V Max.	MAX SIZE, A	CLASS	240V Max.	480V Max.	600V Max.	Time(Sec)	240V Max.	480V Max.	600V Max.	.13	.2	.3	.5	.1	.13	.3	.5
-	G	4000	4000	200kA	200kA	5000	L	100kA	100kA	100kA	0.067	100kA	100kA	100kA	85kA	65kA			65kA			

NOTES:
1) All WCR values indicated are tested in accordance with the requirements of UL 1008, 7th Edition.
2) Application requirements may permit higher WCR for certain switch sizes.
3) Short Time ratings are provided for applications involving circuit breakers that utilize trip delay settings for system selective coordination

4000A ATS Submittal

Transfer Switch Details

#1	ATS	AMPS: 4000	QTY: 1

Product	:	7000 Series Transfer Switches	Catalog Number	:	G07ATSB34000N5XM
Service Voltage / Hz	:	480V/60Hz	Optional Accessories	:	6DL,31BG,44G
Bypass Isolation	:	Not Applicable	Product Description	:	7000 Series, Automatic Open Transition Transfer Switch
No. of Switched Poles: 4	:	4	Neutral Configuration	:	Switched [B]
Withstand Rating: Frame = G, Switch Rating = 4000, Series = 7000	:	See WCR Table Below	No. of Cables & Lug Size	:	12, #3/0 AWG to 750 MCM
Enclosure	:	3R(M)-UL Type 3R secure double door enclosure (See Disclaimer 3)	Service	:	Three Phase, 4-wire
Extended Warranty	:	Not Included	Markings	:	

#	ACCESSORY DESCRIPTIONS	
	Accessory Code	Description
1	6DL	Retransfer to normal mode selector. Maintained two position selector switch permits selection of manual or automatic retransfer. Manual retransfer requires a second selector switch 6B or 6C be momentarily closed to initiate a retransfer to the normal source. While in manual retransfer mode if an emergency source failure should occur and the normal source is still available manual retransfer will be automatically bypassed. A pilot light indicates manual retransfer mode.
2	31BG	Status Relay Bundle - Provides 1 relay (3 total) for each of the following statuses, Normal Source Acceptability, Emergency Source Acceptability, Pre & Post Transfer Signal. Each relay has 2 NO/NC (Form C) sets of contacts rated for 6A at 120Vac, 250Vac Max.
3	44G	208-240VAC and or 440-480VAC Accessory 44 Strip heater is designed to keep humidity and or temperature within the ATS enclosure at acceptable levels. This accessory consists of a mounting bracket with strip heater, thermostat and terminal block. Heater powered from load side of TS.

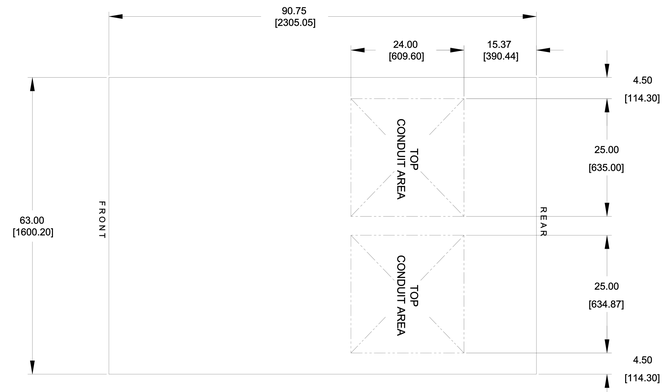

TOP VIEW

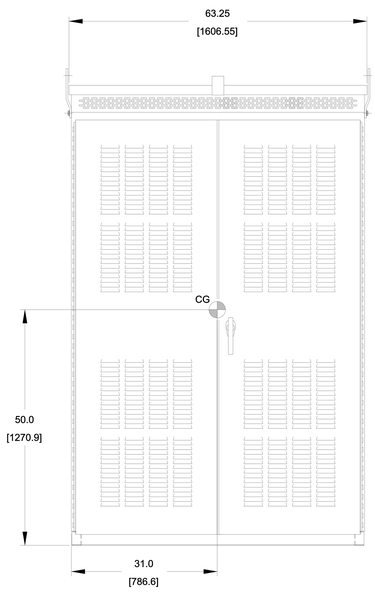

FRONT VIEW

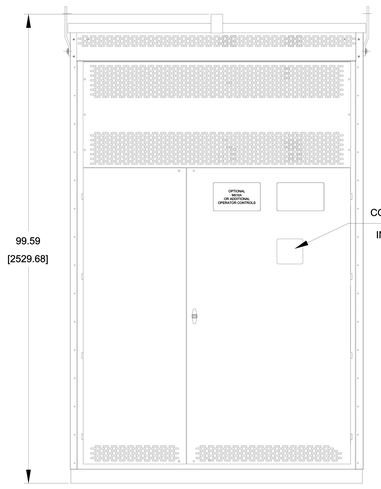

FRONT VIEW

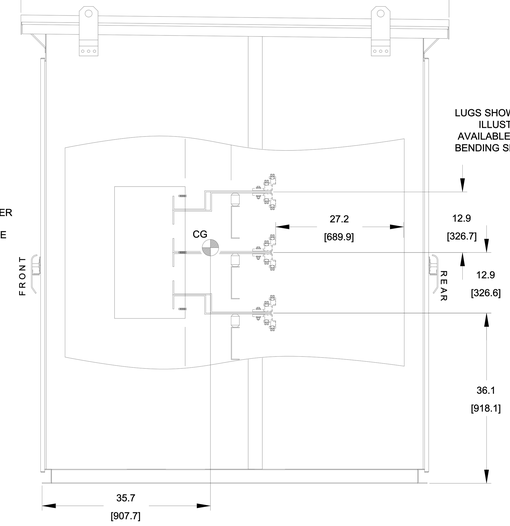

SIDE VIEW

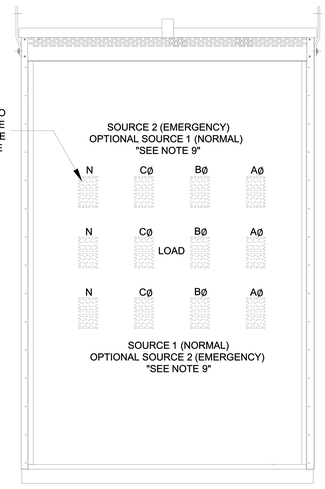

REAR VIEW

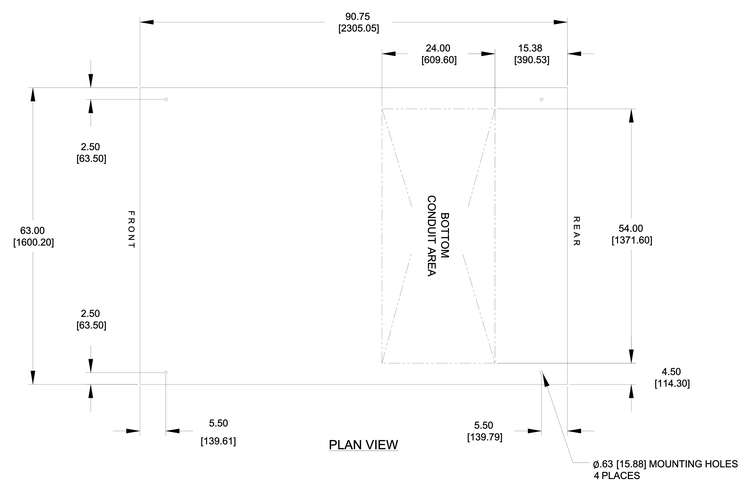

PLAN VIEW

GENERAL NOTES

1. FLOOR MOUNTED ENCLOSURE.
   TYPE 3R (M) CONSTRUCTED FROM CODE GAUGE STEEL.
   FINISH TYPE: ANSI 61 GRAY POLYESTER SEMI GLOSS ELECTROSTATIC POWDER.
   TYPE 3RX (R) EXTERIOR CONSTRUCTED FROM CODE GAUGE TYPE 304 STAINLESS STEEL.
   TYPE 3RX (S) EXTERIOR CONSTRUCTED FROM CODE GAUGE TYPE 316 STAINLESS STEEL.
2. EXTERIOR DOOR HAVE PADLOCKABLE HANDLES WITH 3-POINT LATCH
3. DESIGNED FOR FRONT & REAR ACCESS.
4. RECOMMENDED CLEARANCES: FRONT: 36 [914.40] REAR: 36 [914.40]
5. EXTERIOR VENTS ARE SUPPLIED WITH POLYESTER DUST FILTERS.
6. LIFTING PLATES: SECTIONS ARE SUPPLIED WITH LIFTING PLATES. INSPECT PLATES FOR DAMAGE AND TORQUE BOLTS TO 45 FT LBS [61 N m] BEFORE USE. REFER TO ANSI/NEMA PB 2.1 FOR PROPER HANDLING OF EQUIPMENT. AFTER INSTALLATION OF SECTION, REMOVE LIFTING PLATES. REINSTALL BOLTS INTO EXTERIOR HOLES AND TORQUE TO APPROXIMATELY 20 FT LBS [27 N m].
7. ● NTER OF GRAVITY
8. APPROXIMATE SHIPPING WEIGHT: 3425 LB [1553.5 KG].
9. ACCESSORY 40, OPTIONAL SOURCE LOCATIONS IS AVAILABLE ON SERIES 7000 ONLY.
10. SEE SHEET 3 FOR TERMINATION DETAILS.

TRANSFER SWITCH

1. G FRAME AUTOMATIC/NON-AUTOMATIC TRANSFER SWITCH.
2. TRANSFER SWITCH RATING: 4000 AMPS.
   WITHSTAND AND CLOSING RATING WHEN PROTECTED BY A CIRCUIT BREAKER WITHOUT AN ADJUSTABLE SHORT TIME RESPONSE,
   MAXIMUM 0.05 SECONDS: 100,000 RMS SYM @ 240V, 480V, 600V.
   WITHSTAND AND CLOSING RATING WHEN PROTECTED BY A CIRCUIT BREAKER WITH AN ADJUSTABLE SHORT TIME RESPONSE,
   MAXIMUM 0.13 SECONDS: 85,000 RMS SYM @ 240V, 480V.
   MAXIMUM 0.50 SECONDS: 65,000 RMS SYM @ 240V, 480V, 600V.
3. A FULL RATED NEUTRAL CONNECTION FOR EACH SOURCE AND THE LOAD IS OPTIONAL. WHEN PROVIDED IT IS IN ONE OF THE FOLLOWING FORMATS.
   A. SOLID NEUTRAL
   B. SWITCHED NEUTRAL POLE
   C. OVERLAPPING NEUTRAL POLE (NOT AVAILABLE ON ADTS, ACTS, NDTS & NCTS UNITS)
4. UL 1008 OR CSA C22.2 No. 178.1

TERMINATIONS 4000A

1. SWITCH CAN BE SUPPLIED WITHOUT LUGS (SEE SHEET 2).
   A. SOURCES, LOAD AND GROUND LUG KITS ARE ORDERED SEPARATELY.
2. MECHANICAL (SCREW TYPE) LUGS FOR COPPER (CU) OR ALUMINUM (AL) CABLE WHEN ORDERED WITH SWITCH.
   SOURCE 1 (NORMAL): (12) 1/0-600MCM [50-300mm²] PER PHASE & NEUTRAL
   LOAD: (12) 1/0-600MCM [50-300mm²] PER PHASE & NEUTRAL
   SOURCE 2 (EMERGENCY): (12) 1/0-600MCM [50-300mm²] PER PHASE & NEUTRAL
   GROUND: (36) 1/0-600MCM [50-300mm²]
   A. SUITABLE WIRE BENDING SPACE IS PROVIDED AS PER NEC.

WIRING/CABLING

1. USE 90°C MINIMUM CU/AL WIRE FOR POWER CABLES.
2. WIRE SIZE TO BE BASED ON AMPACITY OF 75°C WIRE.
3. USE 60°C MINIMUM CU WIRE FOR CONTROLS.

DIMENSION ARE IN INCHES [MILLIMETERS]

REV. TO SHEET	ECN NO.	BY	APP.	DATE
R	313278	YK	SV	12/12/24
	SEE ECN			
P	312331	YK	SV	10/07/24
	SEE ECN			

PROJECT NAME:

OUTLINE — MOUNTING

GATS 4000A, PROVISION FOR MECHANICAL LUG
TYPE 3R/3RX 100 X 63 X 91

THIRD ANGLE PROJECTION

	BY	DATE
DRAWN BY	SV	04-21-23
CHECKED	RN	04-21-23
PROJECT APPROVAL		
FINAL APPROVAL	RN	09-04-23
	JPB	09-04-23

MANUFACTURING TOLERANCES TO BE IN ACCORDANCE WITH ASCO PROCEDURE MP-I-003. FOR PLASTIC PARTS SEE MP-I-055

ASSEM. REF. NO.

PROPERTY OF ASCO POWER TECHNOLOGIES. USE PERMITTED FOR OUR WORK ONLY. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

ASCO® ASCO POWER TECHNOLOGIES, L.P.
FLORHAM PARK, NEW JERSEY 07932 U.S.A.

COMPUTER GENERATED DRAWING

SCALE 1/16" = 1" | SIZE DS

DWG. NO. 844459-002

DRAWING REV. R | ECN NO. 313278 | SHEET 1 OF 3

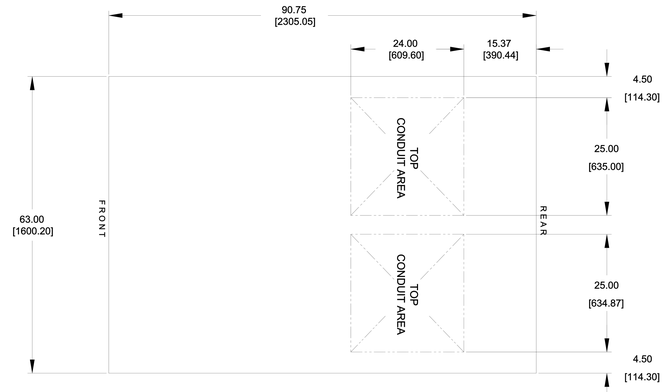

TOP VIEW

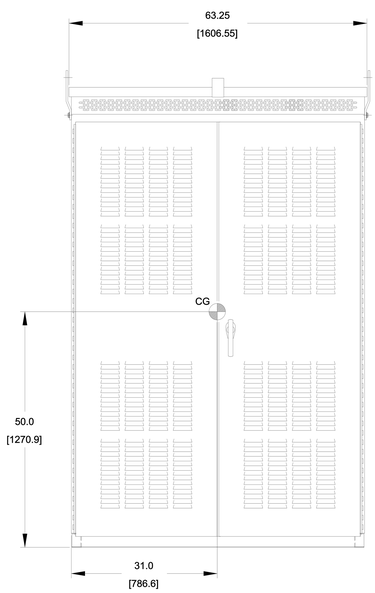

FRONT VIEW

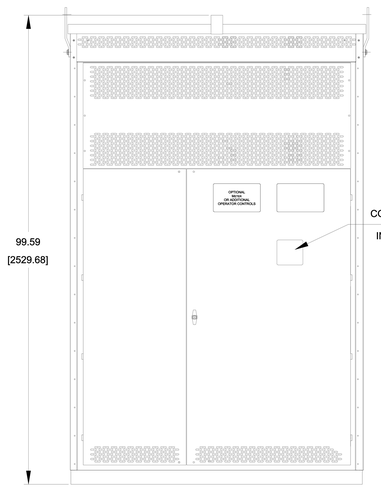

FRONT VIEW

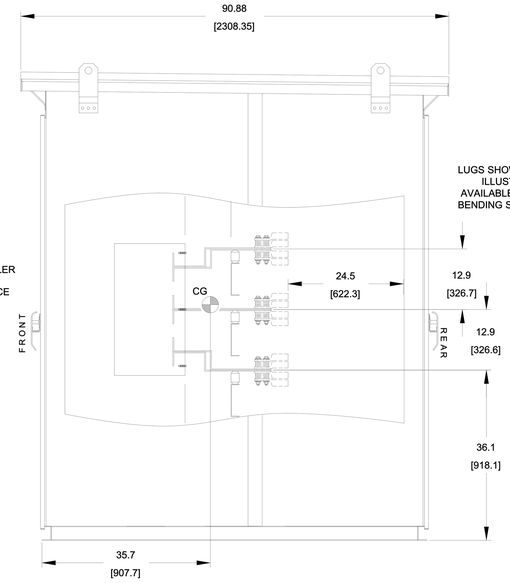

SIDE VIEW

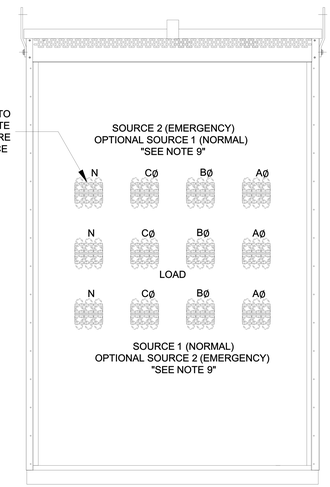

REAR VIEW

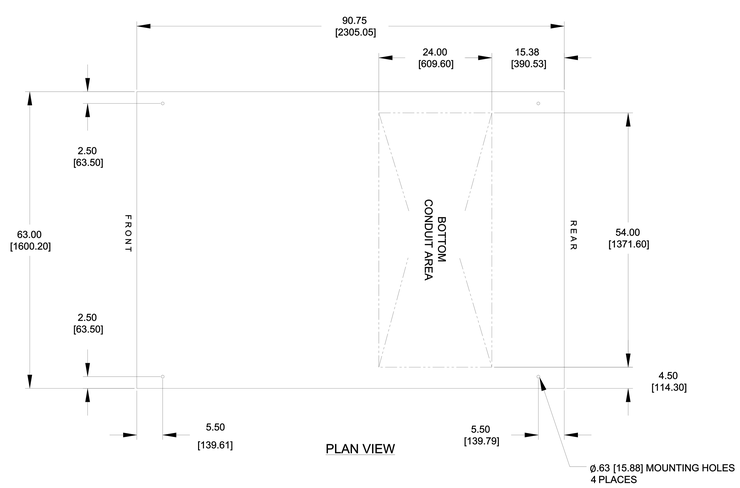

PLAN VIEW

GENERAL NOTES

1. FLOOR MOUNTED ENCLOSURE.
   TYPE 3R (M) CONSTRUCTED FROM CODE GAUGE STEEL.
   FINISH TYPE: ANSI 61 GRAY POLYESTER SEMI GLOSS ELECTROSTATIC POWDER.
   TYPE 3RX (R) EXTERIOR CONSTRUCTED FROM CODE GAUGE TYPE 304 STAINLESS STEEL.
   TYPE 3RX (S) EXTERIOR CONSTRUCTED FROM CODE GAUGE TYPE 316 STAINLESS STEEL.
2. EXTERIOR DOOR HAVE PADLOCKABLE HANDLES WITH 3-POINT LATCH
3. DESIGNED FOR FRONT & REAR ACCESS.
4. RECOMMENDED CLEARANCES: FRONT: 36 [914.40] REAR: 36 [914.40]
5. EXTERIOR VENTS ARE SUPPLIED WITH POLYESTER DUST FILTERS.
6. LIFTING PLATES: SECTIONS ARE SUPPLIED WITH LIFTING PLATES. INSPECT PLATES FOR DAMAGE AND TORQUE BOLTS TO 45 FT LBS [61 N m] BEFORE USE. REFER TO ANSI/NEMA PB 2.1 FOR PROPER HANDLING OF EQUIPMENT. AFTER INSTALLATION OF SECTION, REMOVE LIFTING PLATES. REINSTALL BOLTS INTO EXTERIOR HOLES AND TORQUE TO APPROXIMATELY 20 FT LBS [27 N m].
7. CENTER OF GRAVITY
8. APPROXIMATE SHIPPING WEIGHT: 3425 LB [1553.5 KG].
9. ACCESSORY 40, OPTIONAL SOURCE LOCATIONS IS AVAILABLE ON SERIES 7000 ONLY.
10. SEE SHEET 3 FOR TERMINATION DETAILS.

TRANSFER SWITCH

1. G FRAME 7000 SERIES AUTOMATIC/NON-AUTOMATIC TRANSFER SWITCH.
2. TRANSFER SWITCH RATING: 4000 AMPS.
   WITHSTAND AND CLOSING RATING WHEN PROTECTED BY A CIRCUIT BREAKER WITHOUT AN ADJUSTABLE SHORT TIME RESPONSE,
   MAXIMUM 0.05 SECONDS: 100,000 RMS SYM @ 240V, 480V, 600V.
   WITHSTAND AND CLOSING RATING WHEN PROTECTED BY A CIRCUIT BREAKER WITH AN ADJUSTABLE SHORT TIME RESPONSE,
   MAXIMUM 0.13 SECONDS: 85,000 RMS SYM @ 240V, 480V.
   MAXIMUM 0.50 SECONDS: 65,000 RMS SYM @ 240V, 480V, 600V.
3. A FULL RATED NEUTRAL CONNECTION FOR EACH SOURCE AND THE LOAD IS OPTIONAL. WHEN PROVIDED IT IS IN ONE OF THE FOLLOWING FORMATS.
   A. SOLID NEUTRAL
   B. SWITCHED NEUTRAL POLE
   C. OVERLAPPING NEUTRAL POLE (NOT AVAILABLE ON ADTS, ACTS, NDTS & NCTS UNITS)
4. UL 1008 OR CSA C22.2 No. 178.1

TERMINATIONS 4000A

1. SWITCH SUPPLIED WITHOUT LUGS.
   A. SOURCES, LOAD AND GROUND LUG KITS ARE ORDERED SEPARATELY.
2. COMPRESSION LUGS FOR COPPER (CU) OR ALUMINUM (AL) CABLE.
   LUG SIZES ARE BASED ON T & B AND BURNDY ONLY
   SOURCE 1 (NORMAL): MAX (12) 600MCM [300mm²] PER PHASE & NEUTRAL
   LOAD: MAX (12) 600MCM [300mm²] PER PHASE & NEUTRAL
   SOURCE 2 (EMERGENCY): MAX (12) 600MCM [300mm²] PER PHASE & NEUTRAL
   GROUND: MAX (48) 600MCM [300mm²].
   "CONTACT ASCO FOR NEEDS BEYOND THESE SIZE & QUANTITIES."
   A. SUITABLE WIRE BENDING SPACE IS PROVIDED AS PER NEC.
   B. OPTIONAL LUGS MAY BE SUPPLIED (MAY AFFECT ENCLOSURE SIZE).

WIRING/CABLING

1. USE 90°C MINIMUM CU/AL WIRE FOR POWER CABLES.
2. WIRE SIZE TO BE BASED ON AMPACITY OF 75°C WIRE.
3. USE 60°C MINIMUM CU WIRE FOR CONTROLS.

DIMENSION ARE IN INCHES [MILLIMETERS]

REV. TO SHEET	ECN NO.	BY	APP.	DATE
R	313278	YK	SV	12/12/24
	SEE ECN			
P	312331	YK	SV	10/07/24
	SEE ECN			

PROJECT NAME:

OUTLINE — MOUNTING

GATS 4000A, PROVISION FOR COMPRESSION LUG
TYPE 3R/3RX 100 X 63 X 91, 7000 SERIES TRANSFER SWITCH ONLY

THIRD ANGLE PROJECTION

	BY	DATE
DRAWN BY	SV	04-21-23
CHECKED	RN	04-21-23
PROJECT APPROVAL		
FINAL APPROVAL	RN	09-04-23
	JPB	09-04-23

MANUFACTURING TOLERANCES TO BE IN ACCORDANCE WITH ASCO PROCEDURE MP-I-003. FOR PLASTIC PARTS SEE MP-I-055

ASSEM. REF. NO.

PROPERTY OF ASCO POWER TECHNOLOGIES. USE PERMITTED FOR OUR WORK ONLY. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

ASCO® ASCO POWER TECHNOLOGIES, L.P.
FLORHAM PARK, NEW JERSEY 07932 U.S.A.

COMPUTER GENERATED DRAWING

SCALE 1/16" = 1" SIZE DS

DWG. NO. 844459-002

DRAWING REV. R ECN NO. 313278 SHEET 2 OF 3

"SOURCE & LOAD TERMINATION DETAIL"

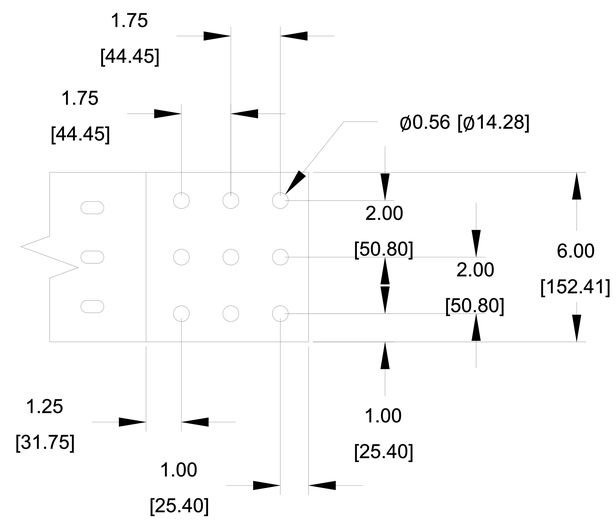

"GROUND TERMINATION DETAIL"

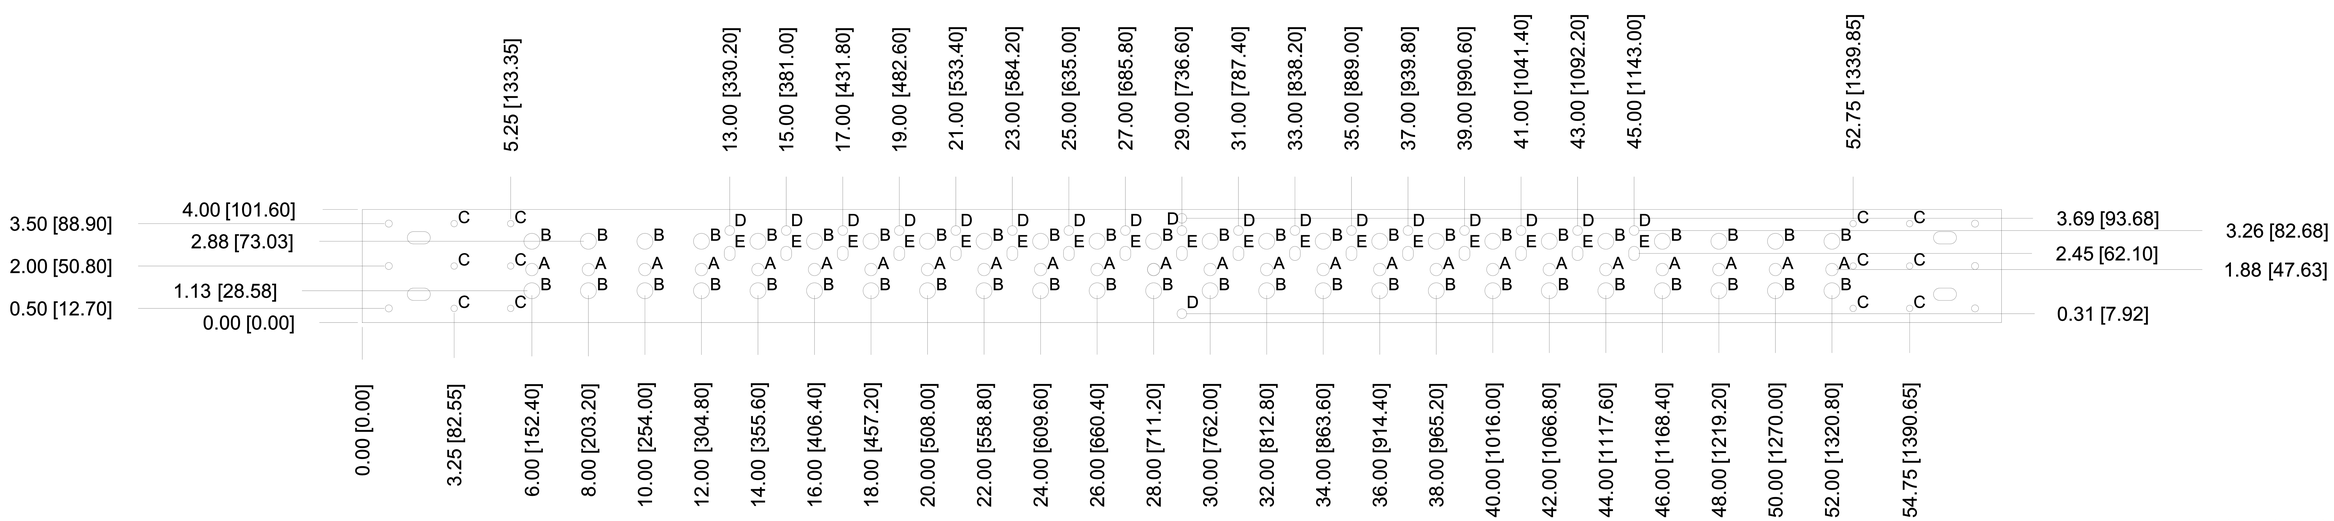

HOLE DATA	
E	0.375 [9.525] WIDE X 0.50 [12.70] SLOT
D	0.340 [8.636] DIA.
C	0.228 [5.791] DIA.
B	0.562 [14.275] DIA.
A	0.437 [11.099] DIA.

DIMENSION ARE IN INCHES [MILLIMETERS]

REV. TO SHEET	ECN NO.	BY	APP.	DATE
R	313278 SEE ECN	YK	SV	12/12/24
P	312331 SEE ECN	YK	SV	10/07/24

PROJECT NAME:

GATS 4000A
TERMINATION DETAILS

THIRD ANGLE PROJECTION

	BY	DATE
DRAWN BY	SV	04-21-23
CHECKED	RN	04-21-23
PROJECT APPROVAL		
FINAL APPROVAL	RN	09-04-23
	JPB	09-04-23

MANUFACTURING TOLERANCES TO BE IN ACCORDANCE WITH ASCO PROCEDURE MP-I-003. FOR PLASTIC PARTS SEE MP-I-055

ASSEM. REF. NO.

PROPERTY OF ASCO POWER TECHNOLOGIES. USE PERMITTED FOR OUR WORK ONLY. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

ASCO® ASCO POWER TECHNOLOGIES, L.P. FLORHAM PARK, NEW JERSEY 07932 U.S.A.

COMPUTER GENERATED DRAWING

SCALE 1/4" = 1" | SIZE DS

DWG. NO. 844459-002

DRAWING REV. R | ECN NO. 313278 | SHEET 3 OF 3

THREE PHASE WIRING FOR ASCO® 7000 SERIES AUTOMATIC TRANSFER SWITCHES TYPE 7ATS RATED 4000 AMPERES

FEATURES, SETTINGS, OPERATION, ACCESSORIES & NOTES

THE FOLLOWING FEATURES AND RELATED SETTINGS ARE PART OF THE GROUP 5 CONTROL PANEL'S USER CONFIGURABLE PARAMETERS. FOR DETAILED INFORMATION REGARDING THE CONFIGURATION OF THESE PARAMETERS AND OTHER FEATURES OF THE GROUP 5 CONTROL PANEL, REFER TO THE GROUP 5 CONTROL PANEL FOR 7000 ASCO SERIES AUTOMATIC TRANSFER SWITCHES USER'S GUIDE (PART NO. 381333-126) PROVIDED WITH EVERY 7000 SERIES AUTOMATIC TRANSFER SWITCH.

THE NOMINAL OPERATING VOLTAGE & FREQUENCY IS PRE-PROGRAMMED AT THE FACTORY BASED ON THE NAMEPLATE DATA PRINTED ON THE TRANSFER SWITCH & CONTROL PANEL NAMEPLATES.

VOLTAGE & FREQUENCY SENSING

THE FOLLOWING SETTINGS ARE EXPRESSED AS A PERCENTAGE OF THE CONTROL PANEL'S NOMINAL VOLTAGE SETTING UNLESS STATED OTHERWISE. ALL SETTINGS ARE ADJUSTABLE IN INCREMENTS OF 1%.

A. RMS VOLTAGE SENSING ON ALL PHASES OF THE NORMAL & EMERGENCY SOURCES.

PARAMETER	RANGE OF SETTINGS	DEFAULT SETTING
NORMAL VOLTAGE DROPOUT	70-98%	85%
NORMAL VOLTAGE PICKUP	85-100%	90%
NORMAL OVER VOLTAGE TRIP	102-115%	OFF
NORMAL VOLTAGE UNBALANCE	YES/NO	NO
NORMAL VOLTAGE UNBALANCE DROPOUT	5-20% OF AVG. NORMAL VOLTAGE	20% (if ON)
NORMAL VOLTAGE UNBALANCE PICKUP	3-18% OF AVG. NORMAL VOLTAGE	10% (if ON)
EMERGENCY VOLTAGE DROPOUT	70-98%	75%
EMERGENCY VOLTAGE PICKUP	85-100%	90%
EMERGENCY OVER VOLTAGE TRIP	102-115%	OFF
EMERGENCY VOLTAGE UNBALANCE	YES/NO	NO
EMERGENCY VOLTAGE UNBALANCE DROPOUT	5-20% OF AVG. EMERGENCY VOLTAGE	20% (if ON)
EMERGENCY VOLTAGE UNBALANCE PICKUP	3-18% OF AVG. EMERGENCY VOLTAGE	10% (if ON)

B. FREQUENCY SENSING OF THE NORMAL & EMERGENCY SOURCES.

PARAMETER	RANGE OF SETTINGS	DEFAULT SETTING
NORMAL FREQUENCY DROPOUT	85-98%	90%
NORMAL FREQUENCY PICKUP	90-100%	95%
NORMAL OVER FREQUENCY TRIP	102-110%	OFF
EMERGENCY FREQUENCY DROPOUT	85-98%	90%
EMERGENCY FREQUENCY PICKUP	90-100%	95%
EMERGENCY OVER FREQUENCY TRIP	102-110%	OFF

TIME DELAYS

THE FOLLOWING TIME DELAY SETTINGS ALL HAVE AN ADJUSTABLE RANGE OF 0-60 min 59 sec UNLESS STATED OTHERWISE. ADJUSTABLE IN INCREMENTS OF 1 sec.
NOTE: SOME TIME DELAYS MAY BE EFFECTED BY CUSTOMER REQUESTED ACCESSORIES PROVIDED WITH THE UNIT. REFER TO THE DESCRIPTIONS PROVIDED UNDER THE "ACCESSORIES" NOTES ON THIS PAGE.

FEATURE	NAME	DEFAULT SETTING
1C	NORMAL SOURCE FAILURE TO ENGINE START	1 sec
2B	TRANSFER TO EMERGENCY ON AVAILABILITY OF EMERGENCY SOURCE	0 sec
1F	EMERGENCY SOURCE FAILURE RETRANSFER (NORMAL SOURCE AVAILABLE)	0 sec
2E	ENGINE COOLDOWN FOLLOWING RETRANSFER TO NORMAL	5 min
3A	RETRANSFER TO NORMAL (NORMAL FAILURE MODE)	30 min
3A	RETRANSFER TO NORMAL (TEST MODE)	30 sec
-	DELAYED TRANSFER (LOAD "OFF" TIME), [0-5 min 59 sec]	3 sec

DESCRIPTIONS OF TIME DELAYS:

FEAT. 1C - DELAY ON NORMAL SOURCE OUTAGE. STARTS ON FAILURE OF NORMAL SOURCE. RESETS IF NORMAL SOURCE IS ACCEPTED BEFORE EXPIRATION. INHIBITS ENGINE STARTING AND AUTOMATIC TRANSFER UNTIL EXPIRATION.

FEAT. 2B - DELAY PRIOR TO TRANSFER TO THE EMERGENCY SOURCE. DELAY STARTS ON EXPIRATION OF FEAT. 1C AND WHEN THE EMERGENCY SOURCE HAS BEEN ACCEPTED. DELAY RESETS IF THE EMERGENCY SOURCE FAILS PRIOR TO EXPIRATION. ON EXPIRATION, TRANSFER TO EMERGENCY IS INITIATED UNLESS THE NORMAL SOURCE HAS RECOVERED AND THE "COMMIT TO TRANSFER" FEATURE IS SET TO "NO" COMMIT. PROVIDES A PERIOD FOR EMERGENCY SOURCE STABILIZATION OR STAGING OF MULTIPLE TRANSFER SWITCH CONTROLLED LOADS TO THE EMERGENCY SOURCE.

FEAT. 1F - DELAY ON RETRANSFER TO NORMAL IN THE EVENT OF EMERGENCY SOURCE FAILURE. DELAY BEGINS ON FAILURE OF THE EMERGENCY SOURCE IF THE NORMAL SOURCE IS ACCEPTABLE. ON EXPIRATION, RETRANSFER TO NORMAL WILL BE INITIATED.

FEAT. 2E - DELAY ON ENGINE SHUTDOWN (ENGINE COOL DOWN PERIOD). DELAY STARTS FOLLOWING RETRANSFER TO THE NORMAL SOURCE. PROVIDES A PERIOD FOR THE ENGINE-GENERATOR SET TO RUN UNLOADED PRIOR TO SHUTDOWN.

FEAT. 3A - RETRANSFER TO NORMAL DELAY (NORMAL FAILURE MODE)
DELAY STARTS WHEN NORMAL SOURCE IS ACCEPTED (FOLLOWING IT'S FAILURE) AND WHILE THE LOAD IS CONNECTED TO EMERGENCY. RESETS IF NORMAL FAILS PRIOR TO EXPIRATION OR IF THE EMERGENCY SOURCE FAILS BEFORE EXPIRATION AND FEAT. 1F EXPIRES (AUTOMATIC BYPASS ON EMERGENCY SOURCE FAILURE). PROVIDES A PERIOD FOR THE NORMAL SOURCE TO STABILIZE PRIOR TO RETRANSFER.

FEAT. 3A - RETRANSFER TO NORMAL DELAY (TEST MODE)
DELAY STARTS WHEN THE "TRANSFER TEST" SWITCH IS RESET TO "AUTO" (FOLLOWING A USER INITIATED TRANSFER TEST) AND WHILE THE LOAD IS CONNECTED TO EMERGENCY. RESETS IF NORMAL FAILS PRIOR TO EXPIRATION OR IF THE EMERGENCY SOURCE FAILS BEFORE EXPIRATION AND FEAT. 1F EXPIRES (AUTOMATIC BYPASS ON EMERGENCY SOURCE FAILURE).

MOTOR LOAD TRANSFER FEATURE

FEAT. 27 - INPHASE TRANSFER CONTROL LOGIC TO INITIATE AN INPHASE TRANSFER OF LOADS BETWEEN LIVE SOURCES. USED TO PREVENT NUISANCE TRIPPING OF CIRCUIT BREAKERS AND POSSIBLE DAMAGE TO MECHANICAL LOADS CAUSED BY OUT OF PHASE TRANSFER.
ACTIVATED VIA THE GROUP 5 CONTROL PANEL USER INTERFACE (TRANSFER CONTROL CENTER) BY SELECTING "IN-PHASE MONITOR ENABLE" = YES. AN ADJUSTABLE DELAY (0.0-3.0 sec, FACTORY SET TO 1.5 sec, IN INCREMENTS OF 0.1 sec) DELAYS SENSING TO PERMIT STABILIZATION OF THE SOURCES PRIOR TO SENSING. FACTORY SETTING IS DISABLED UNLESS SPECIFIED TO BE FACTORY ACTIVATED AT THE TIME OF ORDER.

ENGINE EXERCISER

THE ENGINE EXERCISER FEATURE PROVIDES A MEANS TO PERFORM AUTOMATIC EXERCISING OF THE ENGINE-GENERATOR SET EITHER WITH OR WITHOUT LOAD TRANSFER.
THE USER CAN PROGRAM UP TO SEVEN DIFFERENT EXERCISE ROUTINES. EACH ROUTINE INCLUDES;
1. ENABLE OR DISABLE THE ROUTINE
2. ENABLE OR DISABLE TRANSFER OF THE LOAD DURING THE ROUTINE
3. SET START TIME OF ROUTINE -
   - TIME OF DAY
   - DAY OF WEEK
   - WEEK OF MONTH (1st, 2nd, 3rd, 4th, ALTERNATE OR ALL)
4. SET THE DURATION OF THE ROUTINE

PARAMETER		RANGE OF SETTING	DEFAULT SETTING
MONTH	(CLOCK SET)	JAN FEB MAR APR MAY JUN JUL AUG SEP OCT NOV DEC	CURRENT DATE
DAY		1-31	
YEAR		00-99	
HOUR		0-23	Eastern Standard Time
MINUTE		0-59	
ENABLE ROUTINE	(ROUTINE 1-7)	YES/NO	NO
TRANSFER LOAD		YES/NO	NO
START HOUR		0-23	0
START MINUTE		0-59	0
RUN WEEK		ALL, ALTERNATE, 1st, 2nd, 3rd, 4th, 5th	ALL
RUN DAY		SUN MON TUE WED THU FRI SAT	SUN
DURATION HOURS		0-23	0
DURATION MINUTES		0-59	0

SIGNALS & AUXILIARIES

A. FEATURES 7 & 8- ENGINE START SIGNAL
SIGNAL INITIATED BY DROPOUT OF CONTROL PANEL RELAY (NR) FOLLOWING EXPIRATION OF THE FEATURE 1C TIME DELAY (DELAY TO OVERRIDE MOMENTARY NORMAL SOURCE OUTAGES). FEATURE 7 CLOSES TO SIGNAL ENGINE START. FEATURE 8 OPENS TO SIGNAL ENGINE START. ENGINE STARTING SIGNAL RESETS FOLLOWING RETRANSFER TO THE NORMAL SOURCE AND EXPIRATION OF THE FEATURE 2E (ENGINE COOL DOWN) TIME DELAY. FEATURES 7 & 8 ARE PROVIDED AS A SINGLE FORM C CONTACT CONNECTED TO THE FIELD CONNECTIONS TERMINAL BLOCK (TB). CONTACT RATED 5 AMPS AT 32 VDC/120VAC RESISTIVE.

B. FEATURES 14AG & 14BG - TRANSFER SWITCH AUXILIARY POSITION INDICATING CONTACTS.
EIGHT (8) FORM C CONTACTS TO INDICATE CONNECTION OF THE TRANSFER SWITCH TO NORMAL (14A) AND EIGHT (8) FOR EMERGENCY (14B). CONTACTS CONNECTED TO THE FIELD CONNECTIONS TERMINAL BLOCK (TB). CONTACTS RATED 10 AMPS, 32 VDC, 250 VAC.

C. FEATURE 17 - REMOTE TRANSFER TO EMERGENCY.
REQUIRES A CUSTOMER SUPPLIED NORMALLY OPEN CONTACT. CLOSING OF THE CONTACT CAUSES ENGINE START AND TRANSFER TO THE EMERGENCY SOURCE. OPENING OF THE CONTACT ACTIVATES THE FEATURE 3A (RETRANSFER TO NORMAL) DELAY PRIOR TO RETRANSFER. IN THE EVENT THE EMERGENCY SOURCE FAILS WHILE THE TRANSFER SWITCH IS CONNECTED TO EMERGENCY AND THE REMOTE CONTACT IS CLOSED, THE TRANSFER SWITCH WILL RETRANSFER TO THE NORMAL SOURCE. CONNECTED TO THE FIELD CONNECTIONS TERMINAL BLOCK (TB).

OPERATION

IF THE NORMAL SOURCE FAILS, THE TRANSFER SWITCH INITIATES STARTING OF THE ENGINE-GENERATOR SET. WHEN PROPER VOLTAGE AND FREQUENCY HAVE BEEN ATTAINED, THE LOAD WILL BE TRANSFERRED TO THE EMERGENCY SOURCE.

WHEN THE NORMAL SOURCE IS RESTORED FOR THE DURATION OF THE FEATURE 3A (RETRANSFER TO NORMAL) TIME DELAY SETTING, THE LOAD WILL BE RETRANSFERRED TO THE NORMAL SOURCE.

THE ENGINE WILL CONTINUE TO RUN FOR THE ENGINE COOL DOWN PERIOD, FEATURE 2E.

USER CONTROLS AND INDICATIONS

A. FEATURES 5 & 6B - TRANSFER TEST/RETRANSFER TIME DELAY BYPASS CONTROLS.
TRANSFER TEST:
OPERATION CAUSES A NORMAL SOURCE FAILURE SEQUENCE. ACTIVATE AND HOLD FOR AT LEAST 15 SECONDS TO ALLOW TIME FOR THE ENGINE-GENERATOR TO START.
RETRANSFER TIME DELAY BYPASS:
OPERATION WILL BYPASS THE FEATURE 3A (RETRANSFER TO NORMAL DELAY).

B. FEATURES 9A & 9B - TRANSFER SWITCH POSITION INDICATORS.
FEATURE 9A: TRANSFER SWITCH CLOSED ON NORMAL (GREEN LED)
FEATURE 9B: TRANSFER SWITCH CLOSED ON EMERGENCY (RED LED)

C. FEATURES 9C & 9D - SOURCE ACCEPTANCE INDICATORS.
FEATURE 9C: NORMAL SOURCE ACCEPTED (GREEN LED)
FEATURE 9D: EMERGENCY SOURCE ACCEPTED (RED LED)

GENERAL NOTES

1. SWITCH SHOWN DE-ENERGIZED AND CONNECTED TO THE NORMAL SOURCE.
2. DEVICE SYMBOLS AND DESIGNATIONS ARE IN ACCORDANCE WITH NEMA PUBLICATION ICS 1-1983, PART 1-101A.
3. ALL WIRING IS #16 AWG, TINNED, STRANDED COPPER UNLESS OTHERWISE INDICATED.
4. ON TERMINAL BLOCKS INDICATES AVAILABLE FIELD CONNECTION POINT.
5. ●N TERMINAL BLOCKS INDICATES FACTORY CONNECTION POINT.
6. CONTROL AND ACCESSORY WIRING IS ROUTED IN ACCORDANCE WITH ASCO ASSEMBLY PROCEDURE GS451261.
7. AN OPERATOR'S MANUAL IS FURNISHED WITH EACH AUTOMATIC TRANSFER SWITCH. REFER TO THIS PUBLICATION PRIOR TO INSTALLATION AND OPERATION OF THE UNIT.

ACCESSORIES

ACC. 6DL RETRANSFER TO NORMAL MODE SELECTOR. MAINTAINED TWO POSITION SELECTOR SWITCH. PERMITS SELECTION OF "MANUAL" OR "AUTOMATIC". MANUAL RETRANSFER REQUIRES A SECOND SELECTOR SWITCH (6B OR 6C) BE MOMENTARILY CLOSED TO INITIATE A RETRANSFER TO THE NORMAL SOURCE. WHILE IN MANUAL RETRANSFER MODE, IF AN EMERGENCY SOURCE FAILURE SHOULD OCCUR AND THE NORMAL SOURCE IS STILL AVAILABLE, MANUAL RETRANSFER WILL BE AUTOMATICALLY BYPASSED. LIGHT (RED) ILLUMINATION INDICATES MANUAL RETRANSFER MODE.
NOTE: 6DL1 = KEY OPERATED (OPTIONAL)

ACC. 31BG QTY 2 FORM C CONTACTS THAT OPERATE WHEN EMERGENCY SOURCE VOLTAGE IS ACCEPTABLE AT TRANSFER SWITCH TERMINALS.

QTY 2 FORM C CONTACTS THAT OPERATE WHEN NORMAL SOURCE VOLTAGE IS ACCEPTABLE AT TRANSFER SWITCH TERMINALS

QTY 2 FORM C CONTACTS FOR LOAD DISCONNECT. PROVIDING A PRE-TRANSFER AND/OR POST TRANSFER SIGNAL WHEN TRANSFERRING FROM EMERGENCY TO NORMAL AND/OR NORMAL TO EMERGENCY. ADDITIONALLY, THE SIGNAL CAN BE PROGRAMMED TO OCCUR DURING ALL TRANSFERS OR ONLY WHEN THE TRANSFER IS OCCURRING BETWEEN TWO LIVE SOURCES. THE LENGTH OF THE PRE AND POST TRANSFER DELAYS CAN BE SET TO 0-5 MINUTES, 59 SECONDS.

FACTORY SETTINGS:

.....PARAMETER.....SETTING..
PRE-TRANSFER N>E (31F TIMER) 3 SEC
POST TRANSFER N>E (31M TIMER) 3 SEC
BYPASS 31F & 31M ON SOURCE FAIL NO
PRE-TRANSFER E>N (31G TIMER) 3 SEC
POST TRANSFER E>N (31N TIMER) 3 SEC
BYPASS 31G & 31N ON SOURCE FAIL NO

REFER TO GROUP 5 CONTROL PANEL USER'S GUIDE (PN 381333-126).

BASE CATALOG NUMBER				CATALOG NUMBER SUFFIXES			
CATALOG TYPE	NEUTRAL TYPE	PHASE POLES	AMPS	VOLT CODE	CONTROLLER	OPTIONAL ACCESSORY	ENCLOSURE CODE
7ATS	A B C BLANK FOR NONE	3	4000	C D E F G H J K L M N P Q R	5	X BLANK FOR NONE	C E F G H J K L M N P Q BLANK FOR OPEN TYPE

EXPLANATION OF CATALOG NUMBER CODES

NEUTRAL TYPE		VOLTAGE CODES 3 PHASE (3 OR 4 WIRE) 50 OR 60 Hz		ENCLOSURE CODES		
CODE	DESCRIPTION	CODE	NOMINAL VOLTAGE	CODE	TYPE	DESCRIPTION
BLANK	NONE			BLANK		OPEN TYPE (NO ENCLOSURE)
A	SOLID			C	1	GENERAL PURPOSE, INDOOR
B	SWITCHING	C	208	E	2	INDOOR, WATER & DUST RESISTANT
C	OVERLAPPING	D	220	F	3R	OUTDOOR, RAINPROOF, SLEET & ICE RESISTANT
		E	230	G	4	INDOOR/OUTDOOR, WATERTIGHT & DUSTTIGHT
		F	240	H	4X	TYPE 4 PLUS CORROSION RESISTANCE (STAINLESS STEEL)
		G	277	J	4X	TYPE 4 PLUS CORROSION RESISTANCE (FIBERGLASS)
		H	380	K	7	EXPLOSION PROOF
		J	400	L	12	INDOOR, INDUSTRIAL ENVIRONMENTS, OILTIGHT & DUSTTIGHT
		K	415			
		L	440			(SECURE ENCLOSURES)
		M	460	M	3R	OUTDOOR, RAINPROOF, SLEET & ICE RESISTANT
		N	480	N	4	INDOOR/OUTDOOR, WATERTIGHT & DUSTTIGHT
		P	550	P	4X	TYPE 4 PLUS CORROSION RESISTANCE (STAINLESS STEEL)
		Q	575	Q	12	INDOOR, INDUSTRIAL ENVIRONMENTS, OILTIGHT & DUSTTIGHT
		R	600			

CATALOG NUMBER
ASCO® CERTIFIED TO
S.O.
BY
DATE

FORM REV A

REV. TO SHEET	ECN NO.	BY	APP.	DATE
-	292630 ISSUE	RPP	HSL	11/23/21

PROJECT NAME:

WIRING DIAGRAM
7000 SERIES (G7ATS) 3PH 4000 AMPS
"G" FRAME, GROUP 5 CONTROLS

THIRD ANGLE PROJECTION

	BY	DATE
DRAWN BY	RPP	11/23/21
CHECKED	HSL	11/23/21
PROJECT APPROVAL	MM	11/23/21
FINAL APPROVAL		

MANUFACTURING TOLERANCES TO BE IN ACCORDANCE WITH ASCO PROCEDURE MP-I-003. FOR PLASTIC PARTS SEE MP-I-055

ASSEM. REF. NO.

PROPERTY OF ASCO POWER TECHNOLOGIES. USE PERMITTED FOR OUR WORK ONLY. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

ASCO® ASCO POWER TECHNOLOGIES, L.P.
FLORHAM PARK, NEW JERSEY 07932 U.S.A.

COMPUTER GENERATED DRAWING
SCALE 1:1 SIZE DS
DWG. NO. 844627-123
DRAWING REV. - ECN NO. 292630 SHEET 1 OF 7

FIELD CONNECTIONS

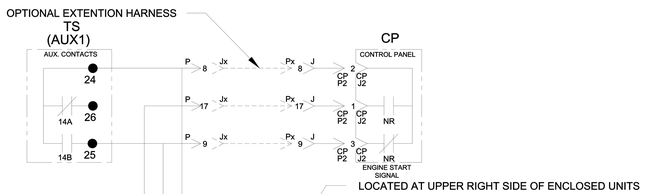

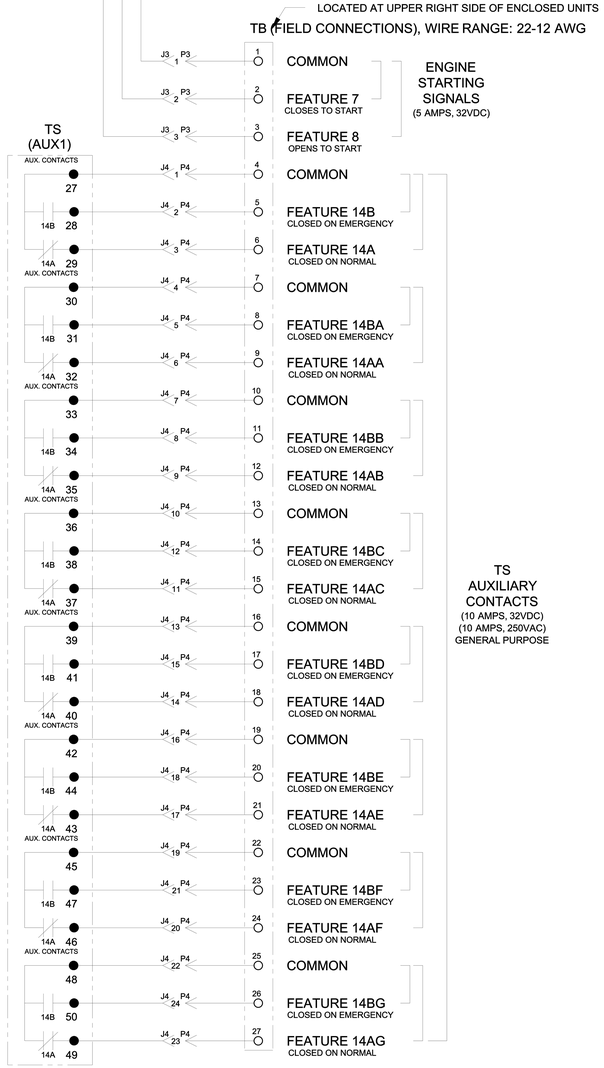

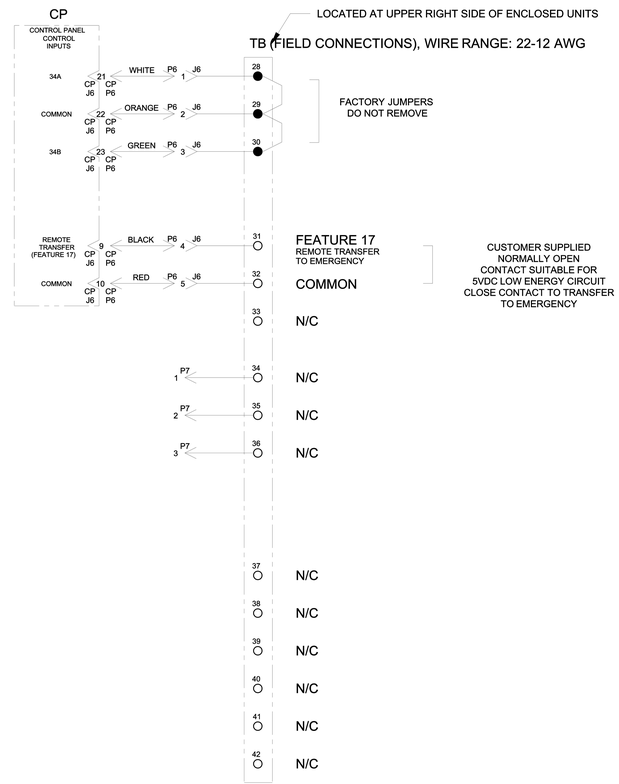

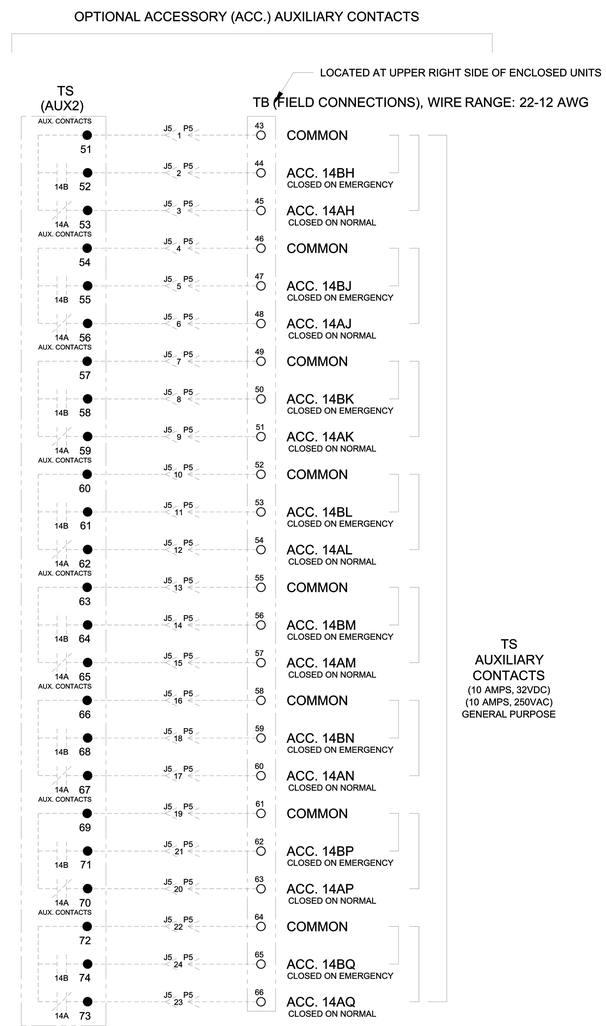

-	292630	RPP	HSL	11/23/21	
REV. TO SHEET	ECN NO.	BY	APP.	DATE	

PROJECT NAME:

WIRING DIAGRAM

7000 SERIES (G7ATS) 3PH 4000 AMPS

"G" FRAME, GROUP 5 CONTROLS

THIRD ANGLE PROJECTION

	BY	DATE
DRAWN BY	RPP	11/23/21
CHECKED	HSL	11/23/21
PROJECT APPROVAL	MM	11/23/21
FINAL APPROVAL		

MANUFACTURING TOLERANCES TO BE IN ACCORDANCE WITH ASCO PROCEDURE MP-I-003. FOR PLASTIC PARTS SEE MP-I-055

ASSEM. REF. NO.

PROPERTY OF ASCO POWER TECHNOLOGIES. USE PERMITTED FOR OUR WORK ONLY. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

ASCO® ASCO POWER TECHNOLOGIES, L.P. FLORHAM PARK, NEW JERSEY 07932 U.S.A.

COMPUTER GENERATED DRAWING

SCALE 1:1 SIZE DS

DWG. NO. 844627-123

DRAWING REV. - ECN NO. 292630 SHEET 2 OF 7

FIELD CONNECTIONS

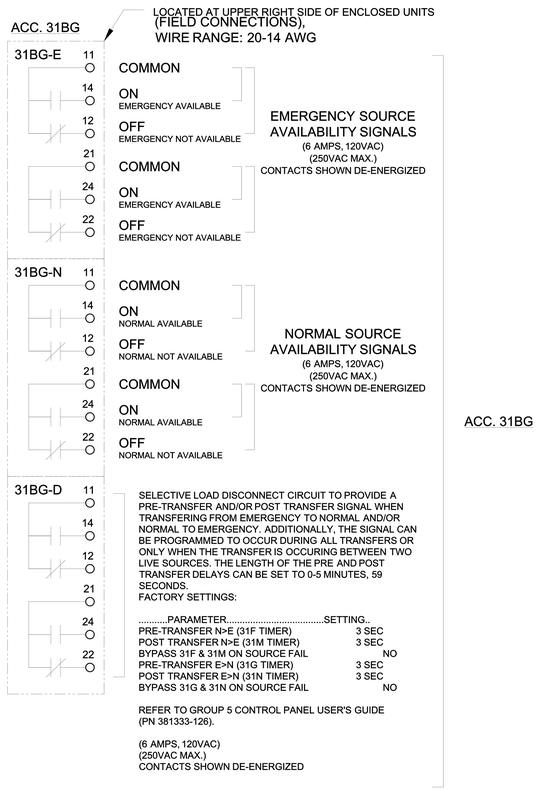

REV. TO SHEET	ECN NO.	BY	APP.	DATE
-	292630	RPP	HSL	11/23/21
	ISSUE			

PROJECT NAME:

WIRING DIAGRAM

7000 SERIES (G7ATS) 3PH 4000 AMPS
"G" FRAME, GROUP 5 CONTROLS

THIRD ANGLE PROJECTION

	BY	DATE
DRAWN BY	RPP	11/23/21
CHECKED	HSL	11/23/21
PROJECT APPROVAL	MM	11/23/21
FINAL APPROVAL		

MANUFACTURING TOLERANCES TO BE IN ACCORDANCE WITH ASCO PROCEDURE MP-I-003. FOR PLASTIC PARTS SEE MP-I-055

ASSEM. REF. NO.

PROPERTY OF ASCO POWER TECHNOLOGIES. USE PERMITTED FOR OUR WORK ONLY. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

ASCO® ASCO POWER TECHNOLOGIES, L.P.
FLORHAM PARK, NEW JERSEY 07932 U.S.A.

COMPUTER GENERATED DRAWING

SCALE 1:1 SIZE DS

DWG. NO. 844627-123

DRAWING REV. - ECN NO. 292630 SHEET 3 OF 7

MAIN POWER POLES

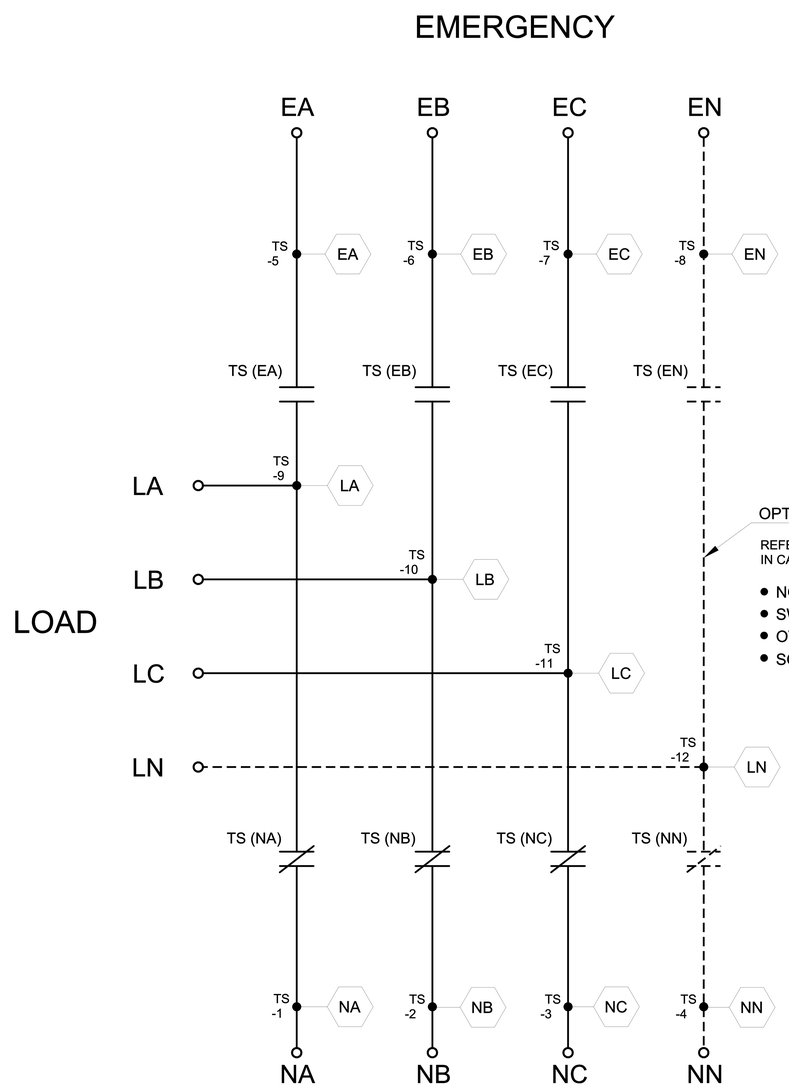

OPTIONAL NEUTRAL TYPES

REFER TO "EXPLANATION OF CATALOG NUMBER CODES" IN CATALOG NUMBER CHART ON SHEET 1.

- NONE
- SWITCHING
- OVERLAPPING CONTACTS
- SOLID BUS PLATE

NOTE:
ATS SHOWN CLOSED ON NORMAL SOURCE.

TS OPERATOR CIRCUIT

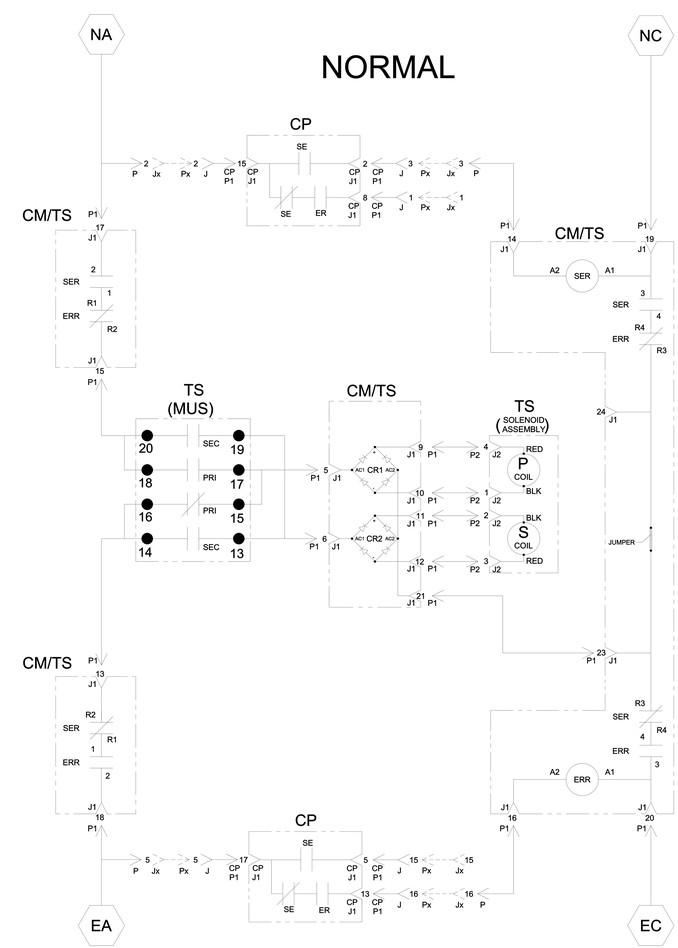

TS (MUS) CONTACTS					
MUS	SOLENOID POSITION				
	NORM	>	AFTER TDC *	<	EMER
13-14					
15-16					
17-18					
19-20					

* AFTER SOLENOID PASSES THROUGH TOP DEAD CENTER POSITION.

REV. TO SHEET	ECN NO.	BY	APP.	DATE
-	292630 ISSUE	RPP	HSL	11/23/21

PROJECT NAME:

WIRING DIAGRAM

7000 SERIES (G7ATS) 3PH 4000 AMPS
"G" FRAME, GROUP 5 CONTROLS

THIRD ANGLE PROJECTION

	BY	DATE
DRAWN BY	RPP	11/23/21
CHECKED	HSL	11/23/21
PROJECT APPROVAL	MM	11/23/21
FINAL APPROVAL		

MANUFACTURING TOLERANCES TO BE IN ACCORDANCE WITH ASCO PROCEDURE MP-I-003. FOR PLASTIC PARTS SEE MP-I-055

ASSEM. REF. NO.

PROPERTY OF ASCO POWER TECHNOLOGIES. USE PERMITTED FOR OUR WORK ONLY. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

ASCO® ASCO POWER TECHNOLOGIES, L.P.
FLORHAM PARK, NEW JERSEY 07932 U.S.A.

COMPUTER GENERATED DRAWING

SCALE 1:1 SIZE DS

DWG. NO. 844627-123

DRAWING REV. - ECN NO. 292630 SHEET 4 OF 7

NORMAL SOURCE CIRCUITS

NORMAL

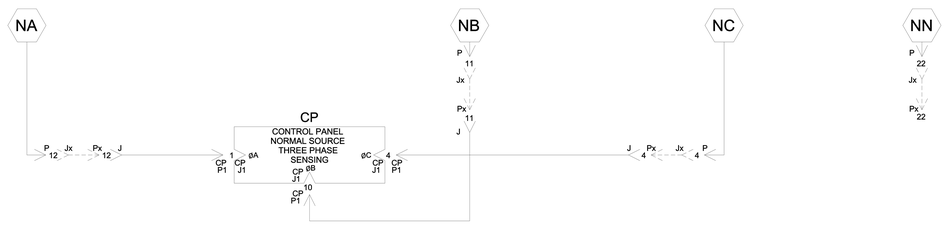

EMERGENCY SOURCE CIRCUITS

EMERGENCY

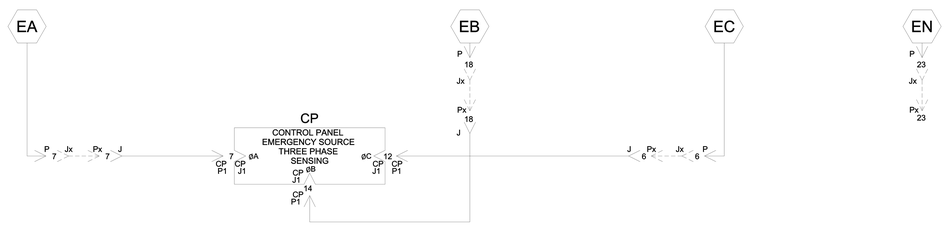

LOAD TERMINAL CIRCUITS

LOAD

CONTROL SIGNALS & INDICATION

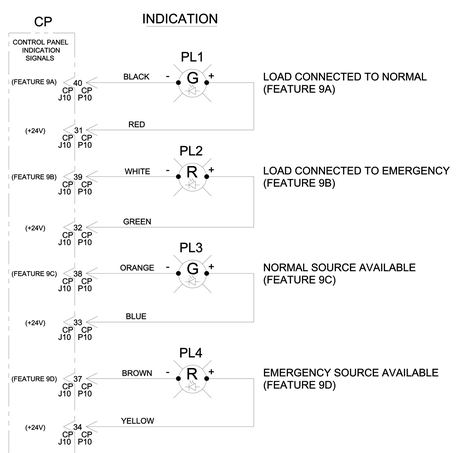

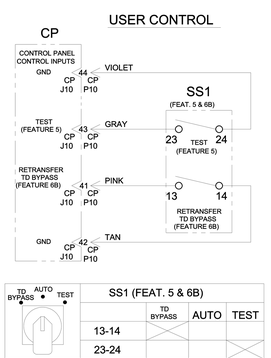

SS1 (FEAT. 5 & 6B)	TD BYPASS	AUTO	TEST
13-14			
23-24			



ADDITIONAL CIRCUITS

ACC. 31BG

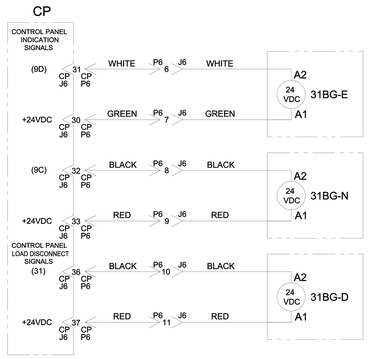

ACC. 6DL

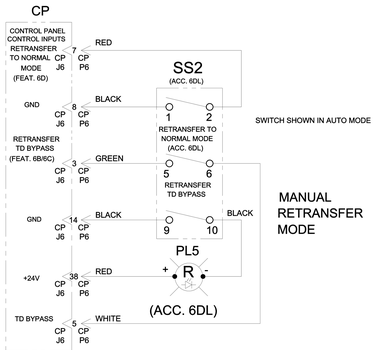



SS2 (ACC. 6DL)	MANUAL	AUTO
1-2		
5-6		
9-10		

NOTE: 6DL1 = KEY OPERATED (OPTIONAL)

REV. TO SHEET	ECN NO.	BY	APP.	DATE
-	292630	RPP	HSL	11/23/21
	ISSUE			

PROJECT NAME:

WIRING DIAGRAM

7000 SERIES (G7ATS) 3PH 4000 AMPS

"G" FRAME, GROUP 5 CONTROLS

THIRD ANGLE PROJECTION

	BY	DATE
DRAWN BY	RPP	11/23/21
CHECKED	HSL	11/23/21
PROJECT APPROVAL	MM	11/23/21
FINAL APPROVAL		

MANUFACTURING TOLERANCES TO BE IN ACCORDANCE WITH ASCO PROCEDURE MP-I-003. FOR PLASTIC PARTS SEE MP-I-055

ASSEM. REF. NO.

PROPERTY OF ASCO POWER TECHNOLOGIES. USE PERMITTED FOR OUR WORK ONLY. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

ASCO® ASCO POWER TECHNOLOGIES, L.P. FLORHAM PARK, NEW JERSEY 07932 U.S.A.

COMPUTER GENERATED DRAWING

SCALE 1:1 SIZE DS

DWG. NO. 844627-123

DRAWING REV. - ECN NO. 292630 SHEET 5 OF 7

PHYSICAL DIAGRAM

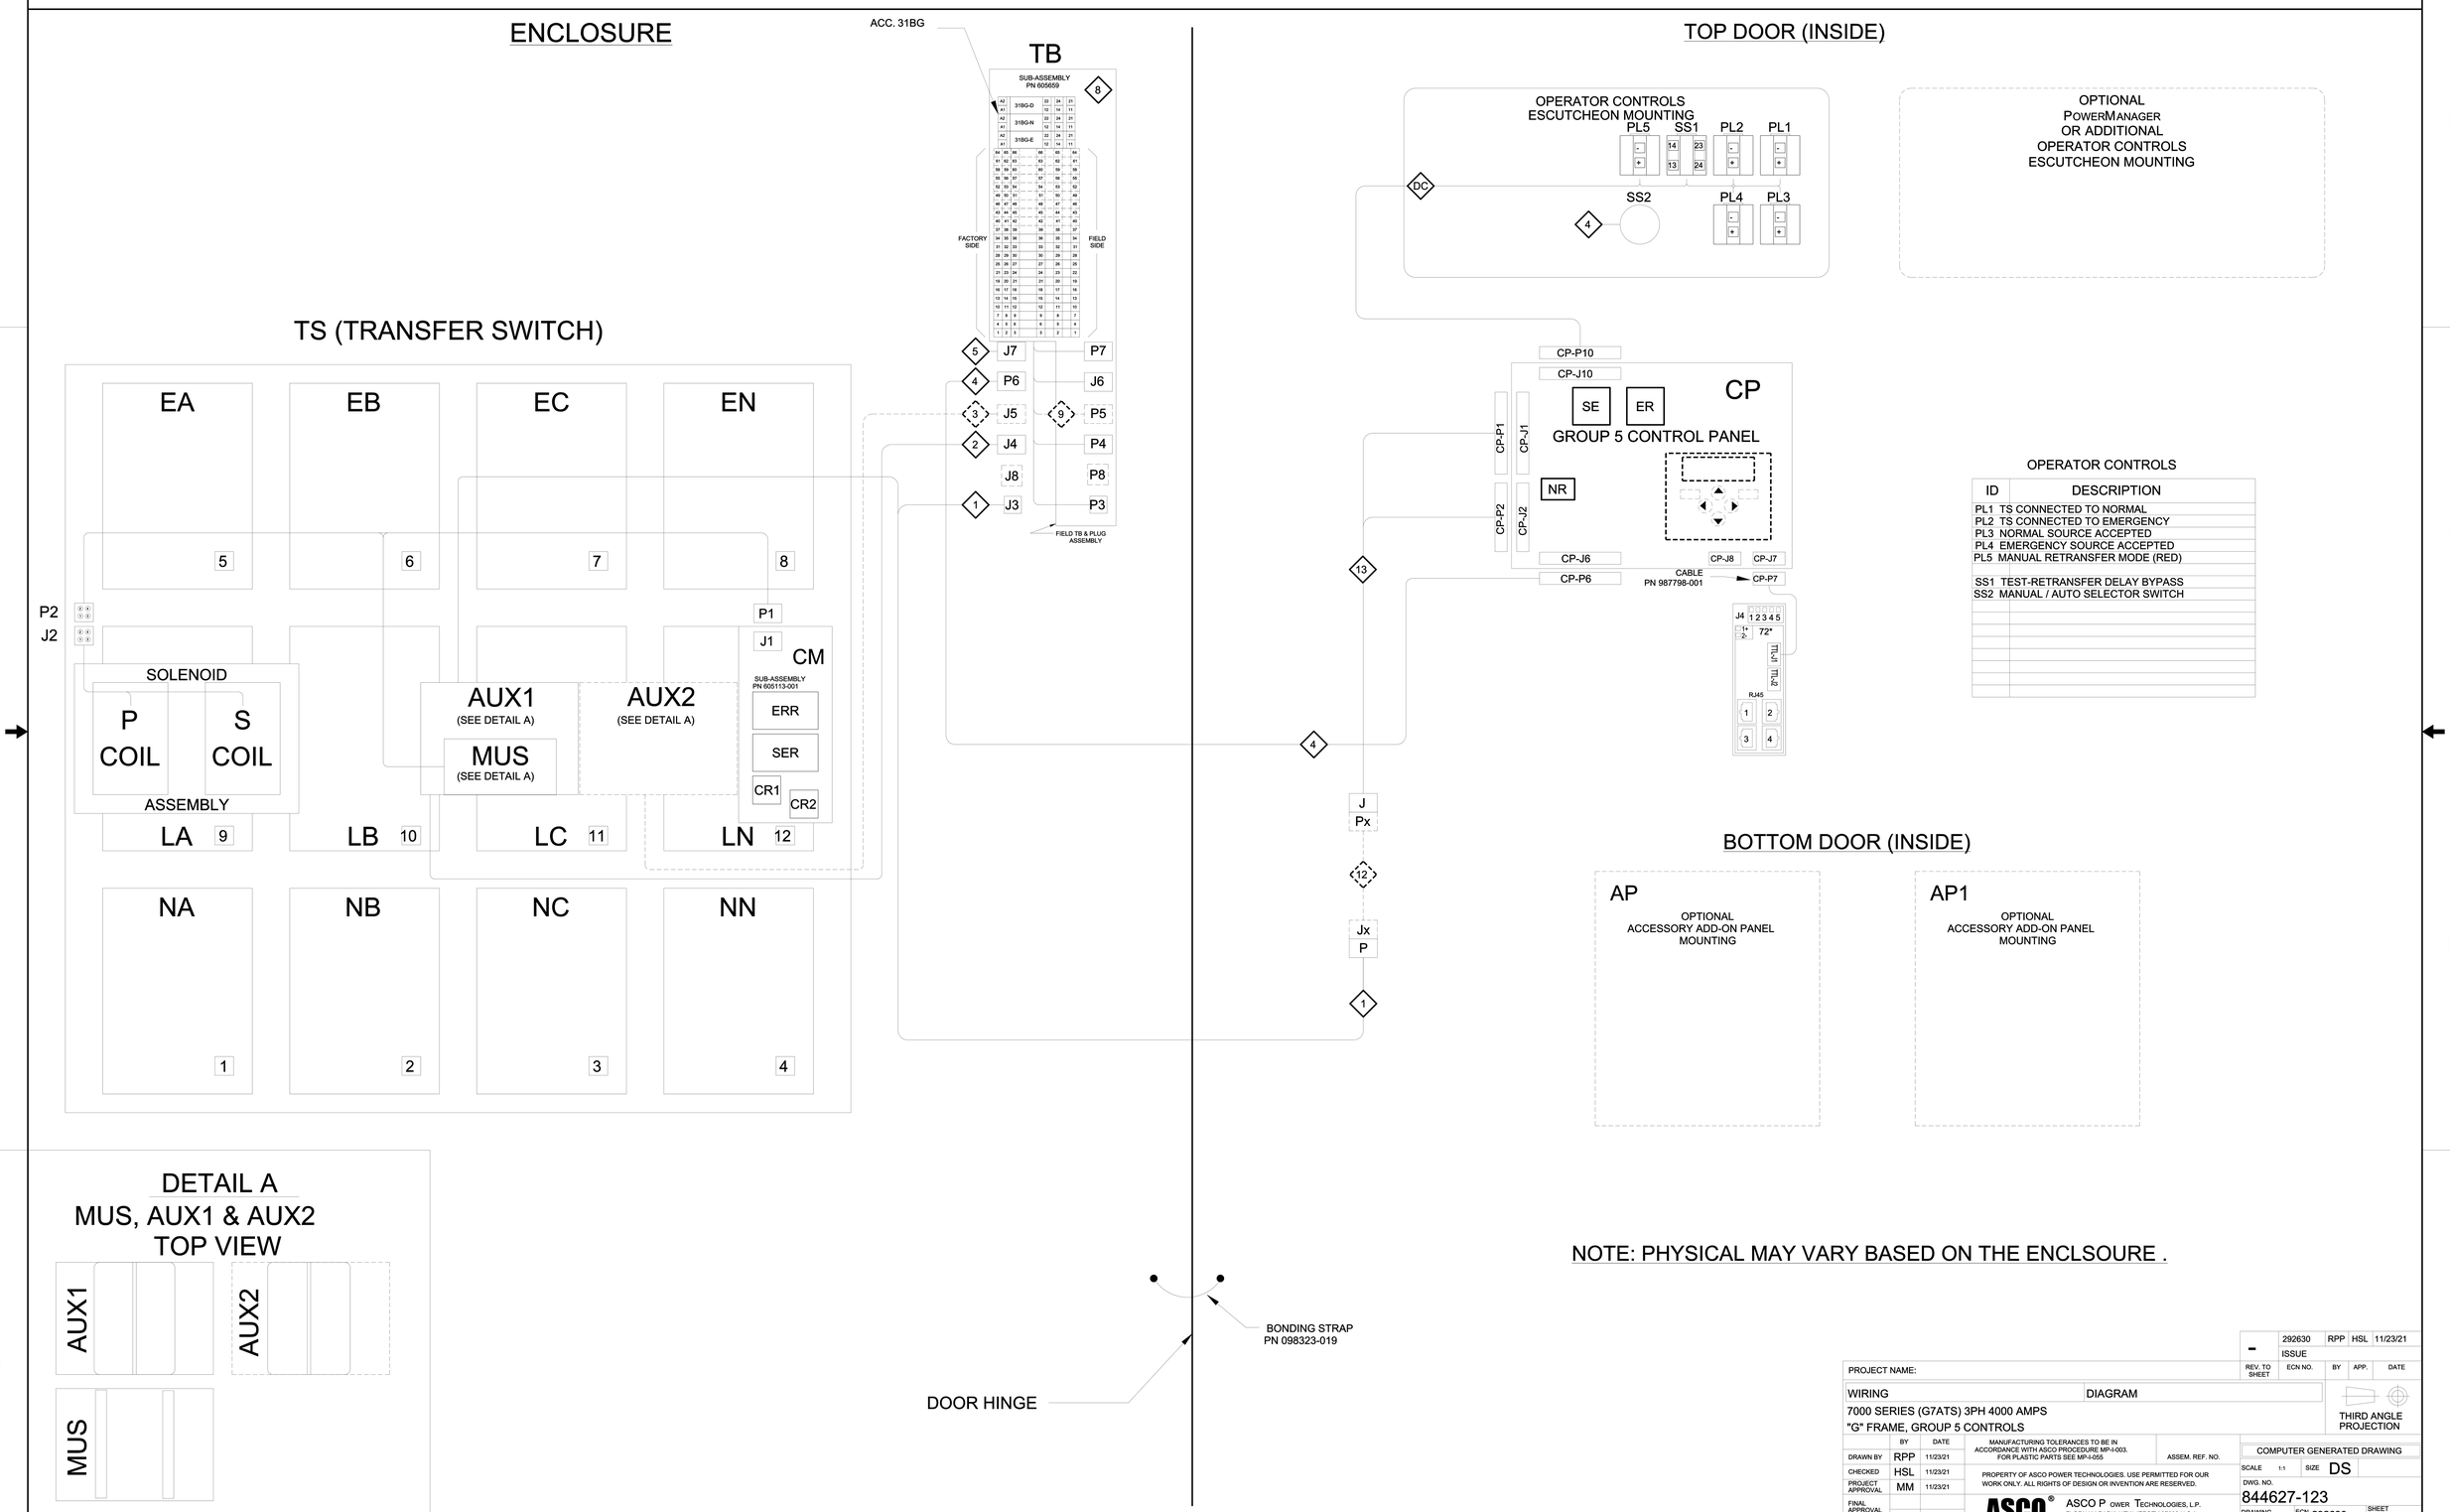

OPERATOR CONTROLS

ID	DESCRIPTION
PL1	TS CONNECTED TO NORMAL
PL2	TS CONNECTED TO EMERGENCY
PL3	NORMAL SOURCE ACCEPTED
PL4	EMERGENCY SOURCE ACCEPTED
PL5	MANUAL RETRANSFER MODE (RED)
SS1	TEST-RETRANSFER DELAY BYPASS
SS2	MANUAL / AUTO SELECTOR SWITCH

NOTE: PHYSICAL MAY VARY BASED ON THE ENCLSOURE .

REV. TO SHEET	ECN NO.	BY	APP.	DATE
-	292630	RPP	HSL	11/23/21

ISSUE

PROJECT NAME:

WIRING — DIAGRAM

7000 SERIES (G7ATS) 3PH 4000 AMPS

"G" FRAME, GROUP 5 CONTROLS

THIRD ANGLE PROJECTION

	BY	DATE
DRAWN BY	RPP	11/23/21
CHECKED	HSL	11/23/21
PROJECT APPROVAL	MM	11/23/21
FINAL APPROVAL		

MANUFACTURING TOLERANCES TO BE IN ACCORDANCE WITH ASCO PROCEDURE MP-I-003. FOR PLASTIC PARTS SEE MP-I-055

ASSEM. REF. NO.

PROPERTY OF ASCO POWER TECHNOLOGIES. USE PERMITTED FOR OUR WORK ONLY. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

ASCO® ASCO POWER TECHNOLOGIES, L.P. FLORHAM PARK, NEW JERSEY 07932 U.S.A.

COMPUTER GENERATED DRAWING

SCALE 1:1 SIZE DS

DWG. NO. 844627-123

DRAWING REV. - ECN NO. 292630 SHEET 6 OF 7

WIRE RUN LISTING

1 HARNESS LOCATOR — BOX CHECKED IF HARNESS IS MODIFIED ☐

WIRE No.	HARNESS 844432 (P,P1,P2,J3) MAIN TS	CLR	AWG
1	P-2,TS-1		16
2	P-3,P1-14		
3	P-4,TS-3		
4	P-5,TS-5		
5	P-6,TS-7		
4	P-7,TS-5		
6	P-8,TS(AUX1)-24		
6	TS(AUX1)-24,J3-1		
7	P-9,TS(AUX1)-25		
7	TS(AUX1)-25,J3-2		
8	P-10,TS(AUX1)-21		
9	P-11,TS-2		
10	P-12,TS-1		
11	P-13,TS(AUX1)-22		
12	P-14,TS(AUX1)-23		
13	P-16,P1-16		
14	P-17,J3-3		
15	P-18,TS-6		
16	P-19,TS-9		
17	P-20,TS-10		
18	P-21,TS-11		
19	P-22,TS-4		
20	P-23,TS-8		
21	P-24,TS-12		
22	P1-5,TS(MUS)-17		
22	TS(MUS)-17,TS(MUS)-15		
23	P1-6,TS(MUS)-19		
23	TS(MUS)-19,TS(MUS)-13		
24	P1-9,P2-4		
25	P1-10,P2-1		
26	P1-11,P2-2		
27	P1-12,P2-3		
28	P1-13,TS(MUS)-16		
28	TS(MUS)-16,TS(MUS)-14		
29	P1-15,TS(MUS)-20		
29	TS(MUS)-20,TS(MUS)-18		
1	P1-17,TS-1		
4	P1-18,TS-5		
3	P1-19,TS-3		
5	P1-20,TS-7		
30	P1-21,P1-23		
	ADD WIRES		
200	P-1		
222	P-15		
201	P1-1		
202	P1-2		
203	P1-3		
204	P1-4		
205	P1-7		
206	P1-8		
207	P1-16		
208	P1-22		
209	P1-24		
221	J3-4		

2 HARNESS LOCATOR — BOX CHECKED IF HARNESS IS MODIFIED ☐

WIRE No.	HARNESS 844432-001 (J4) STANDARD AUX. CONTACTS	CLR	AWG
40	J4-1,TS(AUX1)-27		16
41	J4-2,TS(AUX1)-28		
42	J4-3,TS(AUX1)-29		
43	J4-4,TS(AUX1)-30		
44	J4-5,TS(AUX1)-31		
45	J4-6,TS(AUX1)-32		
46	J4-7,TS(AUX1)-33		
47	J4-8,TS(AUX1)-34		
48	J4-9,TS(AUX1)-35		
49	J4-10,TS(AUX1)-36		
50	J4-11,TS(AUX1)-37		
51	J4-12,TS(AUX1)-38		
52	J4-13,TS(AUX1)-39		
53	J4-14,TS(AUX1)-40		
54	J4-15,TS(AUX1)-41		
55	J4-16,TS(AUX1)-42		
56	J4-17,TS(AUX1)-43		
57	J4-18,TS(AUX1)-44		
58	J4-19,TS(AUX1)-45		
59	J4-20,TS(AUX1)-46		
60	J4-21,TS(AUX1)-47		
61	J4-22,TS(AUX1)-48		
62	J4-23,TS(AUX1)-49		
63	J4-24,TS(AUX1)-50		

3 HARNESS LOCATOR — BOX CHECKED IF HARNESS IS MODIFIED ☐

WIRE No.	HARNESS 844432-002 (J5) OPTIONAL AUX. CONTACTS	CLR	AWG
70	J5-1,TS(AUX2)-51		16
71	J5-2,TS(AUX2)-52		
72	J5-3,TS(AUX2)-53		
73	J5-4,TS(AUX2)-54		
74	J5-5,TS(AUX2)-55		
75	J5-6,TS(AUX2)-56		
76	J5-7,TS(AUX2)-57		
77	J5-8,TS(AUX2)-58		
78	J5-9,TS(AUX2)-59		
79	J5-10,TS(AUX2)-60		
80	J5-11,TS(AUX2)-61		
81	J5-12,TS(AUX2)-62		
82	J5-13,TS(AUX2)-63		
83	J5-14,TS(AUX2)-64		
84	J5-15,TS(AUX2)-65		
85	J5-16,TS(AUX2)-66		
86	J5-17,TS(AUX2)-67		
87	J5-18,TS(AUX2)-68		
88	J5-19,TS(AUX2)-69		
89	J5-20,TS(AUX2)-70		
90	J5-21,TS(AUX2)-71		
91	J5-22,TS(AUX2)-72		
92	J5-23,TS(AUX2)-73		
93	J5-24,TS(AUX2)-74		

4 HARNESS LOCATOR — BOX CHECKED IF HARNESS IS MODIFIED ☒

WIRE No.	HARNESS 619510-005 (P6) FIELD INPUTS	CLR	AWG
100	P6-1,CP-P6-21	WHT	
101	P6-2,CP-P6-22	ORG	22
102	P6-3,CP-P6-23	GRN	(12 COND)
103	P6-4,CP-P6-9	BLK	
104	P6-5,CP-P6-10	RED	
	ADD WIRES		
105	P6-6,CP-P6-31	WHT	
106	P6-7,CP-P6-30	GRN	22
107	P6-8,CP-P6-32	BLK	(4 COND)
108	P6-9,CP-P6-33	RED	
109	P6-10,CP-P6-36	BLK	22
110	P6-11,CP-P6-37	RED	(2 COND)
111	P6-12		16
112	P6-13		
113	P6-14		
114	P6-15		
115	P6-16		
116	P6-17		
117	P6-18		
118	P6-19		
119	P6-20		
120	P6-21		
121	P6-22		
122	P6-23		
123	P6-24		
300	CP-P6-3,SS2-5	GRN	22
301	CP-P6-5,SS2-6	WHT	(4 COND)
302	CP-P6-8,SS2-1	BLK	
303	CP-P6-7,SS2-2	RED	
304	CP-P6-14,SS2-9	BLK	22
305	CP-P6-38,PL5(+)	RED	(2 COND)
306	PL5(-),SS2-10	BLK	22

5 HARNESS LOCATOR — BOX CHECKED IF HARNESS IS MODIFIED ☐

WIRE No.	HARNESS (J7) FIELD OUTPUTS	CLR	AWG
130	J7-1		16
131	J7-2		
132	J7-3		
133	J7-4		
134	J7-5		
135	J7-6		
136	J7-7		
137	J7-8		
138	J7-9		
139	J7-10		
140	J7-11		
141	J7-12		
142	J7-13		
143	J7-14		
144	J7-15		
145	J7-16		
146	J7-17		
147	J7-18		
148	J7-19		
149	J7-20		
150	J7-21		
151	J7-22		
152	J7-23		
153	J7-24		

DC HARNESS LOCATOR — BOX CHECKED IF HARNESS IS MODIFIED ☐

WIRE No.	HARNESS 713083-001 (CP-P10) DOOR CONTROLS & INDICATORS		CLR	AWG
170	CP-P10-31,PL1(+)	RED		
171	CP-P10-42,SS1-14	TAN		
172	CP-P10-40,PL1(-)	BLK		
173	CP-P10-39,PL2(-)	WHT		
174	CP-P10-38,PL3(-)	ORG		
175	CP-P10-37,PL4(-)	BRN		22
176	CP-P10-43,SS1-23	GRY		(12 COND)
177	CP-P10-41,SS1-13	PNK		
178	CP-P10-32,PL2(+)	GRN		
179	CP-P10-33,PL3(+)	BLU		
180	CP-P10-34,PL4(+)	YEL		
181	CP-P10-44,SS1-24	VIO		
	REMOVE WIRES			
	ADD WIRES			

8 HARNESS LOCATOR — BOX CHECKED IF HARNESS IS MODIFIED ☒

WIRE No.	SUB-ASSEMBLY 605659 (P3,P4,J6,P7,TB) STD. FIELD TB		CLR	AWG
6	TB-1,P3-1			16
7	TB-2,P3-2			
14	TB-3,P3-3			
40	TB-4,P4-1			
41	TB-5,P4-2			
42	TB-6,P4-3			
43	TB-7,P4-4			
44	TB-8,P4-5			
45	TB-9,P4-6			
46	TB-10,P4-7			
47	TB-11,P4-8			
48	TB-12,P4-9			
49	TB-13,P4-10			
51	TB-14,P4-12			
50	TB-15,P4-11			
52	TB-16,P4-13			
54	TB-17,P4-15			
53	TB-18,P4-14			
55	TB-19,P4-16			
57	TB-20,P4-18			
56	TB-21,P4-17			
58	TB-22,P4-19			
60	TB-23,P4-21			
59	TB-24,P4-20			
61	TB-25,P4-22			
63	TB-26,P4-24			
62	TB-27,P4-23			
100	TB-28,J6-1			
101	TB-29,J6-2			
102	TB-30,J6-3			
103	TB-31,J6-4			
104	TB-32,J6-5			
130	TB-34,P7-1			
131	TB-35,P7-2			
132	TB-36,P7-3			
	JUMPERS			
	TB-28,TB-29			
	TB-29,TB-30			
	ADD WIRES			
221	P3-4			
105	J6-6,31BG-E-A2	WHT		
106	J6-7,31BG-E-A1	GRN		22
107	J6-8,31BG-N-A2	BLK		(4 COND)
108	J6-9,31BG-N-A1	RED		
109	J6-10,31BG-D-A2	BLK		22
110	J6-11,31BG-D-A1	RED		(2 COND)
111	J6-12			16
112	J6-13			
113	J6-14			
114	J6-15			
115	J6-16			
116	J6-17			
117	J6-18			
118	J6-19			
119	J6-20			
120	J6-21			
121	J6-22			
122	J6-23			
123	J6-24			
133	P7-4			
134	P7-5			
135	P7-6			
136	P7-7			
137	P7-8			
138	P7-9			
139	P7-10			
140	P7-11			
141	P7-12			
142	P7-13			
143	P7-14			
144	P7-15			
145	P7-16			
146	P7-17			
147	P7-18			
148	P7-19			
149	P7-20			
150	P7-21			
151	P7-22			
152	P7-23			
153	P7-24			

9 HARNESS LOCATOR — BOX CHECKED IF HARNESS IS MODIFIED ☐

WIRE No.	HARNESS 605454-008 (P5,TB) OPT. AUX. CONTACTS	CLR	AWG
70	TB-43,P5-1		16
71	TB-44,P5-2		
72	TB-45,P5-3		
73	TB-46,P5-4		
74	TB-47,P5-5		
75	TB-48,P5-6		
76	TB-49,P5-7		
77	TB-50,P5-8		
78	TB-51,P5-9		
79	TB-52,P5-10		
80	TB-53,P5-11		
81	TB-54,P5-12		
82	TB-55,P5-13		
83	TB-56,P5-14		
84	TB-57,P5-15		
85	TB-58,P5-16		
87	TB-59,P5-18		
86	TB-60,P5-17		
88	TB-61,P5-19		
90	TB-62,P5-21		
89	TB-63,P5-20		
91	TB-64,P5-22		
93	TB-65,P5-24		
92	TB-66,P5-23		

12 HARNESS LOCATOR — BOX CHECKED IF HARNESS IS MODIFIED ☐

WIRE No.	HARNESS 309320-005 OPTIONAL 8" EXTENSION HARNESS	CLR	AWG
200	Jx-1,Px-1		16
1	Jx-2,Px-2		
2	Jx-3,Px-3		
3	Jx-4,Px-4		
4	Jx-5,Px-5		
5	Jx-6,Px-6		
4	Jx-7,Px-7		
6	Jx-8,Px-8		
7	Jx-9,Px-9		
8	Jx-10,Px-10		
9	Jx-11,Px-11		
10	Jx-12,Px-12		
11	Jx-13,Px-13		
12	Jx-14,Px-14		
222	Jx-15,Px-15		
13	Jx-16,Px-16		
14	Jx-17,Px-17		
15	Jx-18,Px-18		
16	Jx-19,Px-19		
17	Jx-20,Px-20		
18	Jx-21,Px-21		
19	Jx-22,Px-22		
20	Jx-23,Px-23		
21	Jx-24,Px-24		

13 HARNESS LOCATOR — BOX CHECKED IF HARNESS IS MODIFIED ☐

WIRE No.	HARNESS 483763 (J,CP-P1,CP-P2) CONTROL PANEL	CLR	AWG
200	J-1,CP-P1-8		16
1	J-2,CP-P1-15		
2	J-3,CP-P1-2		
3	J-4,CP-P1-4		
4	J-5,CP-P1-17		
5	J-6,CP-P1-12		
4	J-7,CP-P1-7		
6	J-8,CP-P2-2		
7	J-9,CP-P2-3		
8	J-10,CP-P2-8		
9	J-11,CP-P1-10		
10	J-12,CP-P1-1		
11	J-13,CP-P2-9		
12	J-14,CP-P2-10		
222	J-15,CP-P1-5		
13	J-16,CP-P1-13		
14	J-17,CP-P2-1		
15	J-18,CP-P1-14		
	ADD WIRES		
16	J-19		
17	J-20		
18	J-21		
19	J-22		
20	J-23		
21	J-24		

-	292630	RPP	HSL	11/23/21
	ISSUE			
REV. TO SHEET	ECN NO.	BY	APP.	DATE

PROJECT NAME:

WIRING — DIAGRAM

7000 SERIES (G7ATS) 3PH 4000 AMPS
"G" FRAME, GROUP 5 CONTROLS

THIRD ANGLE PROJECTION

	BY	DATE
DRAWN BY	RPP	11/23/21
CHECKED	HSL	11/23/21
PROJECT APPROVAL	MM	11/23/21
FINAL APPROVAL		

MANUFACTURING TOLERANCES TO BE IN ACCORDANCE WITH ASCO PROCEDURE MP-I-003. FOR PLASTIC PARTS SEE MP-I-055

ASSEM. REF. NO.

PROPERTY OF ASCO POWER TECHNOLOGIES. USE PERMITTED FOR OUR WORK ONLY. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

ASCO® ASCO POWER TECHNOLOGIES, L.P.
FLORHAM PARK, NEW JERSEY 07932 U.S.A.

COMPUTER GENERATED DRAWING

SCALE — SIZE DS

DWG. NO. 844627-123

DRAWING REV. - — ECN NO. 292630 — SHEET 7 OF 7

EQUIPMENT STORAGE REQUIREMENTS

Equipment provided by Schneider-Electric and/or ASCO Power Technologies that is stored for a short-term duration (i.e., days to weeks) or long-term duration (i.e., months to years), must be kept in a cool, dry, temperature-controlled environment. Storage of equipment in open warehouses, locations without proper temperature and humidity control, and/or outdoor storage is not acceptable without the utilization of heating elements, thermostats, humidistats, and protection from weather and dirt. Failure to comply may result in moisture ingress and/or condensation to form resulting in rusting and or corrosion, component and/or equipment failure and replacement, and/or nullification of any manufacturer warranty.

For **General Instructions for Proper Handling, Installation, Operation, and Maintenance of Deadfront Distribution Switchboards Rated 600 Volts or Less**, refer to ANSI NEMA PB 2.1-2013

Copies of the following documents should be included on the submittals, depending on the units that are on the proposal:

For ASCO Power Technology's **Switchgear and Switchboards**, refer to Instruction Bulletin **381333-393**.
For Schneider-Electric/Square D's **Power Zone 4 (PZ4) Switchgear**, refer to Instruction Bulletin **80298-002-09**.
For Schneider-Electric/Square D's **Power Zone 4 (PZ4) NEMA 3R Walk-In Switchgear**, refer to Instruction Bulletin **80298-156-02**.
For Schneider-Electric/Square D's **Quality, Efficient, Delivery" (QED2) Switchboard**, refer to Instruction Bulletin **80043-055-14**.
For Schneider-Electric/Square D's **Masterclad Metal-Clad Indoor Switchgear**, refer to Instruction Bulletin **6055-30.**

Power Transfer for Mission-Critical Applications

ASCO Power Technologies™

ASCO 7000 SERIES
Low-Voltage Transfer Switches

ascopower.com

Life Is On | Schneider Electric

ASCO 7000 SERIES Power Transfer Switches

ASCO 7000 SERIES Power Transfer Switches provide unmatched reliability and sophisticated control for the most demanding mission-critical backup power needs.

Power Knowledge

Transfer Switch Overview

ASCO 7000 SERIES Transfer Switches are widely used in the most complex mission-critical hospital and healthcare facilities, enterprise and cloud-based data centers, telecommunication networks, water treatment plants, and any facility that requires the highest levels of power availability.

Every 7000 SERIES transfer switch is engineered-to-order to optimize switch functionality and provide facilities with the best solution for their specific application, and custom-engineering is available to meet any transfer switching need.

Backed by industry-leading technical support and service knowledge derived from a century of critical power switching experience, the 7000 SERIES solves the most demanding critical power challenges facing facilities today.

"With nine hospitals on the line, ASCO helps me sleep well at night."

Tom M., Facility Engineering Director

7000 SERIES Power Transfer Switches

ASCO Power Transfer Switches are the standard of the industry. High-speed transfer of loads between alternate sources of power, regardless of ampacity, is achieved using a reliable, field-proven solenoid operating mechanism.

- Listed to UL 1008 Transfer Switch Equipment and Certified to CSA 22.2, No. 178
- Qualified and certified to IEC 60947-6-1, optional CE mark
- Rated up to 600 VAC, 30 through 4000 amps
- 3 to 18-Cycle Withstand and Close-on Rating Standard, 30-Cycle WCR Optional
- High Withstand and Close-on Rating, including Short-Time Ratings, support breaker coordination
- Solid, switched, or overlapping neutral configurations
- Front-replaceable main and arcing contacts on 800-4000 amp models
- Central terminal block for control connections on 260-4000 amp models
- Multiple auxiliary contacts for switch status indication
- Local and remote communications for serial and ethernet monitoring systems such as ASCO monitoring solutions or 3rd party BMS
- Comprehensive 2, 5, or 10 year warranty

Power Knowledge

Basic Automatic Transfer Switch Functions

Three Pole 7000 SERIES Automatic Transfer Switch rated 1600 amps

7000 SERIES Power Switching Solutions

Automatic and Non-Automatic Transfer Switching

ASCO Transfer Switches are available in automatic and non-automatic types. For automatic transfer switches, the controller initiates transfer. For non-automatic transfer switches, a user initiates transfer between power sources using local or remote switches. ASCO 7000 SERIES Transfer Switches offer the following features:

- Rated up to 600VAC, sizes from 30 through 4000 amps
- Low control circuit currents allow for long distances between remotely control switches and transfer switches
- Non-automatic models provide source acceptability lights to inform operator when sources are available to accept load

Power Knowledge

Non-Automatic and Manual Transfer Switches for Backup Power Applications

Four Pole, Non-Automatic, Electrically-Operated 400 Amp Switch in a Type 1 Enclosure

Open Transition Transfer Switching

ASCO Transfer Switches are available with a standard, 2-position, open transition models that reliably transfer loads in a "break-before-make" sequence in less than 50 milliseconds. Open transition switches are suitable for a wide range of applications.

- 30 to 4000 amps
- Fast single-operator switching mechanism prevents simultaneous connection of both sources
- Available In-Phase Monitor can be activated for transferring motor loads

Delayed Transition Transfer Switching

ASCO Delayed Transition Transfer Switches transfer loads between power sources using a timed, load, disconnect position with an adjustable delay. Applications include older variable frequency drives, rectifier banks, and load management applications.

- 150 through 4000 amps
- Mechanical interlocks to prevent interconnection of both sources
- LED Indicator for load disconnect position
- Adjustable time delay for load disconnect position

Closed Transition Transfer Switching

ASCO Automatic Closed Transition Transfer Switches overlap the normal and emergency source to transfer without power interruption. The switch transfers in a make-before-break sequence if both power sources are within acceptable parameters. Control logic continuously monitors source conditions and automatically selects delayed or closed transition according to real-time values.

- Available 150 through 4000 amps
- Closed Transition Transfer occurs passively without directly controlling the engine-generator set
- Overlap time is less than 100 milliseconds
- Indications for failure-to-synchronize and extended parallel time
- Protective circuits and sequences to prevent extended paralleling of sources.

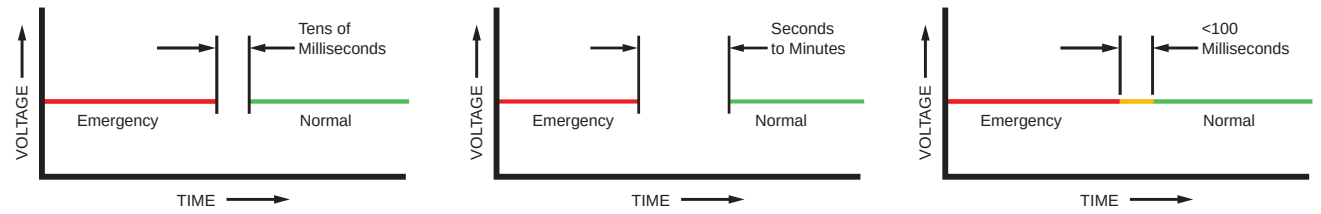

Open Transition | Delayed Transition | Closed Transition

Power Knowledge

- Transferring Motor Loads between Power Sources
- Transition Mode Basics
- Transferring Loads with Zero Power Interruption

7000 SERIES Bypass-Isolation Switches

Bypass-Isolation Automatic Transfer Switches

ASCO Bypass-Isolation Automatic Transfer Switches are available in open transition, delayed transition, and closed transition designs. The bypass-isolation features allow the primary automatic transfer switch to be inspected, tested, and maintained without interrupting power to the load. They also provide redundant power transfer if the ATS is disabled or removed from service.

- 150 to 4000 amps
- Bypass switch and transfer switch have identical electrical ratings
- Mechanical interlocks prevent unintended operation
- Bypass contacts carry current only during bypass operation
- Draw-out design eases transfer switch maintenance
- Bypass switch is rated for use as a 3-position manual transfer switch
- Non load break bypass and isolation operations keep continuous power to loads
- Bypass and isolation functions require only two permanently mounted operating handles
- Mechanical indicators show bypass and transfer switch positions
- Shallow depth, front-connected, or rear-connected designs

Power Knowledge

3D Bypass Switch Animation

Product Details

Bypass-Isolation Transfer Switches

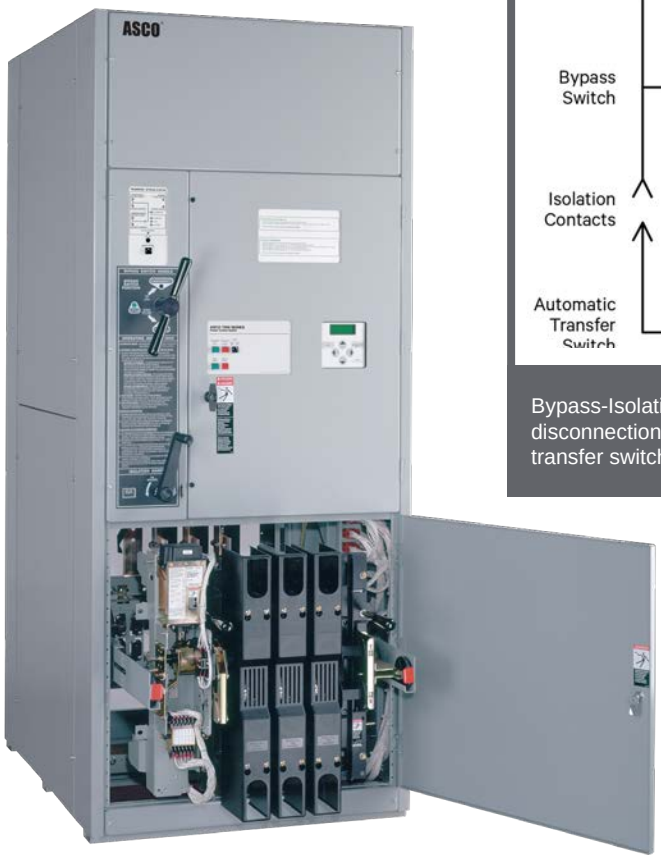

Bypass-Isolation Transfer Switch, J-Frame, 150-600 amps

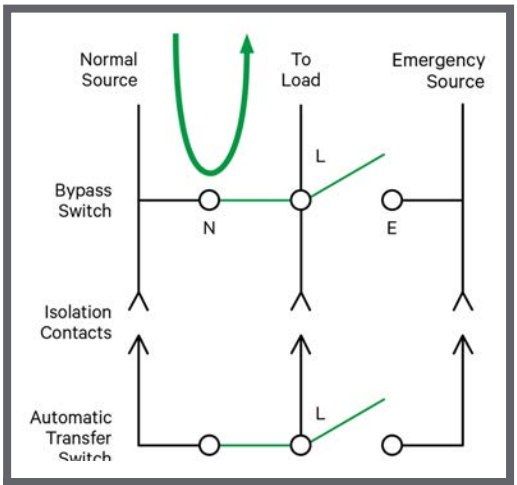

Bypass-Isolation Transfer Switch allow disconnection and draw-out of the primary transfer switch without disrupting power to loads.

7000 SERIES Service Entrance Switches

Service Entrance Power Transfer Switches

The ASCO Service Entrance Power Transfer Switch combines automatic power switching with a disconnect and over-current protection device for the utility source. These switches are installed at facilities that have a single utility feed and a single emergency power source. A circuit breaker serves as the utility disconnect. This product is available up to 600V and 4000 amps in Standard, Delayed, Closed Transition, and Bypass-Isolation configurations.

- Available from 70 to 4000 amps, up to 600V
  - 70 - 400 amp listed to UL 1008
  - 600 - 4000 amp listed to UL 891
- UL 1008 Listed transfer mechanism
- Disconnect links on Neutral and Ground
- Internet-enabled monitoring and control
- ERMS added upon request
- Disconnect and over-current protective device on the utility source. 70 to 2000 amp models use molded case circuit breakers; 2500 to 4000 amp models use insulated case circuit breakers.

Power Knowledge

Applications for Service Entrance Automatic Transfer Switches

Product Details

Service Entrance Transfer Switches

Custom-Engineered Transfer Switches

Optimized Solutions for Mission-Critical Performance

Create an exact power control solutions by integrating service equipment and protective devices and incorporating distribution equipment while accommodating unique application requirements. Custom engineered devices can save space, reduce delivery times, streamline installation and commissioning, enhance quality control, and reduce overall cost.

Power Knowledge

Benefits of Custom-Engineered Transfer Switches

Integrated Distribution Breakers

Common distribution breaker applications include:

- Panels to house molded case circuit breakers
- Insulated case circuit breakers, with or without drawout capability
- Manually or electrically operated circuit breakers

Automatic Transfer Switchboard

- Connects multiple automatic transfer switches together in a common switchboard
- Circuit breakers on the normal and load sides of each switch
- An ammeter and voltmeter are also located on the load side of each switch

Transfer Switches can be custom-engineered to integrate service entrance equipment, distribution equipment, and more.

"The maintenance is top notch and the technical support is amazing. ASCO service techs ... do what's right for the hospital, not just the job."

Mark Y., Electrical Management Supervisor

Additional Available Custom Features

These examples are just a few of the configurations and features available through custom-engineered solutions. Additional possibilities include:

- Custom Metering
- Source Fusing
- Bus Riser
- Utility-Specified Compartments
- Customized or compression lugs

For more information, contact an authorized ASCO Power Technologies Representative.

7000 SERIES Controls and Indicators

Group 5 Controller

The 7000 SERIES Group 5 Controller is reliable and field-proven. It provides all of the voltage, frequency, control, timing, and diagnostic functions required for most emergency and standby power applications.

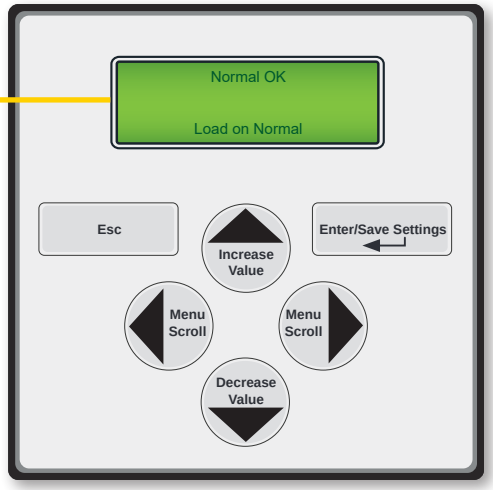

- Touch pad programming
- Displays active timers
- On-board diagnostics
- Password protection
- Voltage and frequency sensing
- Status and control functions

Source Status

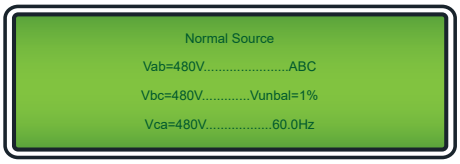

In-phase Transfer Status

Voltage and Frequency Settings

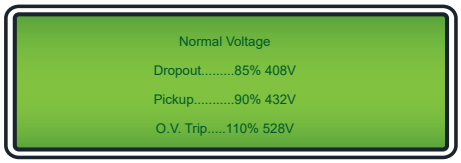

Engine Exerciser

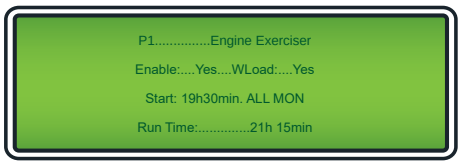

Product Details

Group 5 Controller

Control Switches and Indicating Lights

- Switch position indicating lights
- Source acceptability indicator lights
- Three-position selector switch:
  - Automatic: Normal position
  - Test: Simulate normal source failure
  - Reset Delay Bypass: Bypass transfer and re-transfer time delays

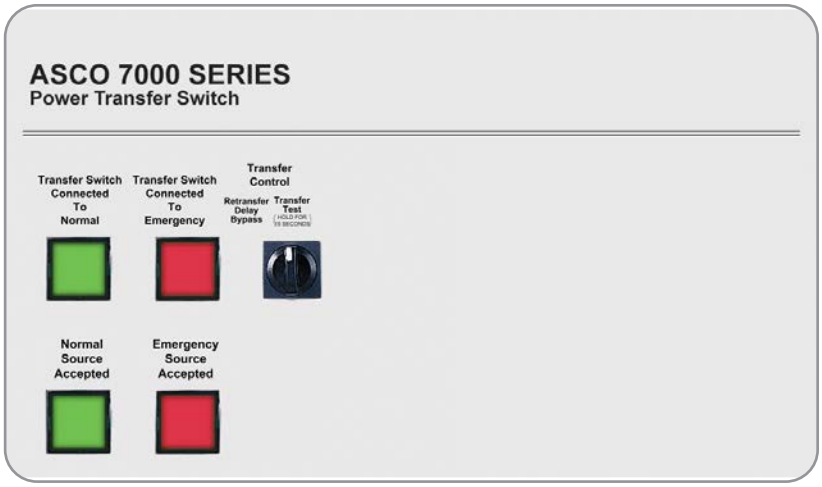

Control Switches and Indicating Lights for Closed Transition Switches

Additional controls and Indicators for:

- *Extended Parallel Time* - Provides visual indication when the pre-set extended parallel time has been exceeded. The controls automatically open the emergency or normal main contacts. Separate contact also available to shunt trip external breaker.
- *Failure To Synchronize* - Visually displays a failure to synchronize alarm if the time delay settings are exceeded during closed transition transfer operation.
- *Transfer Switch Locked Out* - Prevents transfer in either direction if the extended parallel time is exceeded.
- *Alarm Reset* - Resets extended parallel and failure to synchronize alarms.
- *Closed Transition Bypass* - Pushbutton allows transfer between sources in an open transition mode.

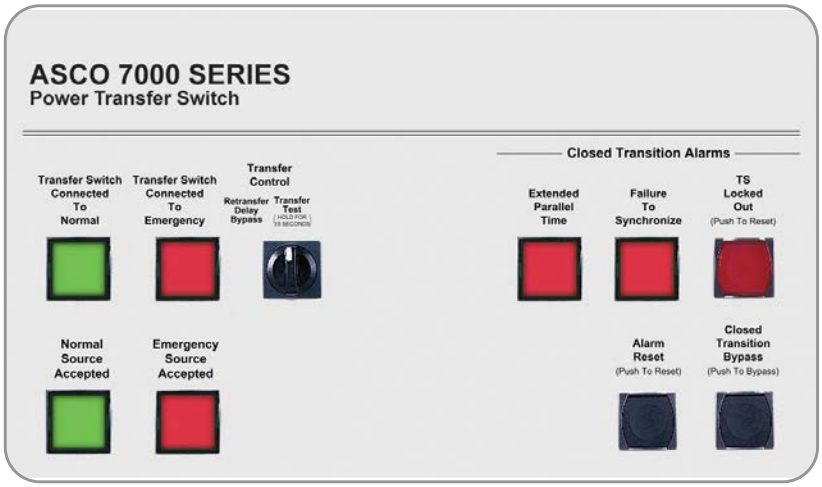

Transfer Switch Communications and Metering

Options to Customize Functionality and Increase Value

Product Details

- 5300 SERIES Annunciators
- 5700 SERIES Annunciator

Remote Annunciation

Monitor Power Equipment Status from Anywhere

Monitoring and control transfer switches from across the room, building, or from Internet.

5310 – LED annunciator – Single ATS

5350 – LED annunciator – up to 8 ATSs

5705 – Interactive CPMA-based graphical annunciator – up to 8 ATSs

Product Details

- 5170 Connectivity Module
- 5701 Gateway

Communication

Turn Transfer Switches into Power Information Portals

5170 Connectivity Module – Makes status and power information from a single switch available to via ModBUS, SNMP, and web pages.

5701 8 Device Gateway – Provides centralized monitoring of up to 8 power devices through a transfer switch. Connects generators, transfer switches, load banks, and more to web pages for increased monitoring and control.

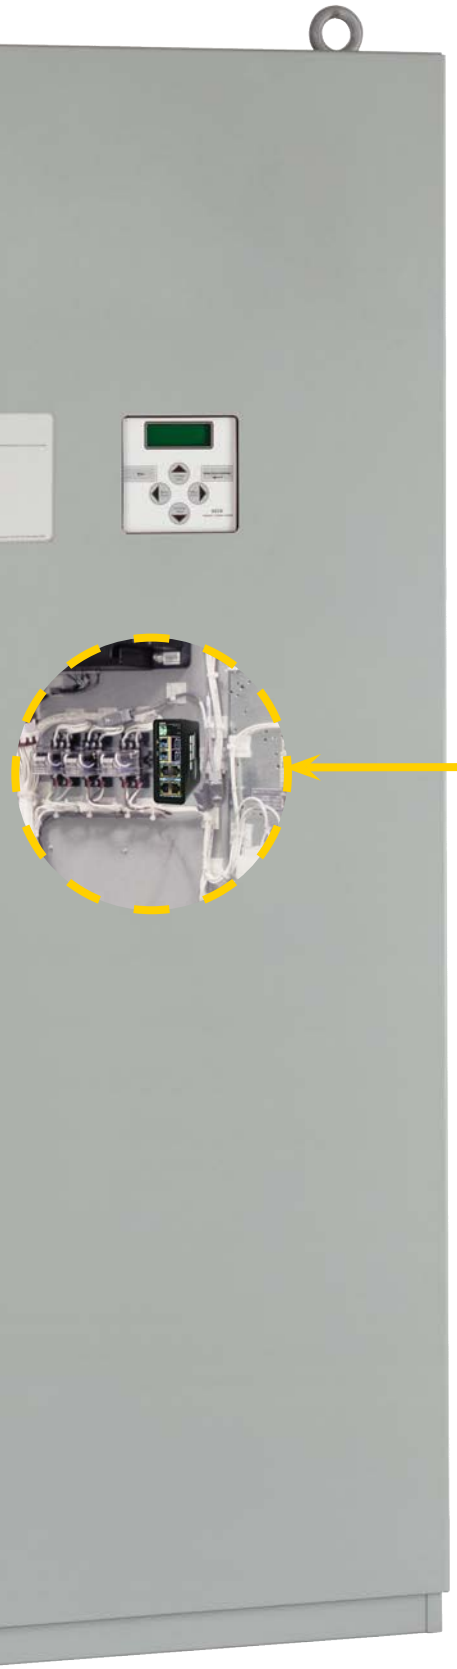

Metering

Transfer Switches are the Perfect Place to Monitor Power Flow, Power Conditions, and Power Events

5210 Power meter – Provides deeper insight into circuit status and conditions. Basic metering for current, voltage, frequency, harmonics, real/reactive/apparent power.

PowerLogic PM 8000 – Schneider Electric's compact, high-performance, power meter simplifies power quality and maximizes versatility. Provides additional insights with waveform capture and individual harmonic metering .

Product Details

- 5210 Power Meter
- PowerLogic PM 8000

7000 SERIES Optional Accessories

Time Delays and Extended Control Power	
1G1	Auxiliary power connections provide for external 24VDC source to power control panel and power manager/meter when normal and emergency sources are not present or the switch is in isolation mode. Allows for use of full range of extended engine starting time delay feature 1C (0-60min 59 sec).
1GB1	Same as accessory 1G1 except using 120-volt AC external input.
1PS1	Extended control power ride-through (approx. 25 seconds) for Group 5 ATS controller and select communications and metering accessories, e.g. Acc. 72EE2, 72FC, 135L, etc.
Manual Controls for Automatic Transfer Switches	
6DL	Selector switch for automatic/manual re-transfer to normal. Automatic bypass if emergency fails.
Indicators and Customer Control Circuits	
30A	Load-shed circuit initiated by opening of a customer-supplied contact.
30B3	24 VDC load-shed circuit initiated by removal of customer-supplied control voltage. (6, 12, 48, 120 VDC and 120 VAC also available).
31BG	Provides 2 sets of Form C contacts rated at 6A for each of the following status signals: normal source acceptability, emergency source acceptability, pre/post transfer signal.
99	"Push-to-Test" feature on all pilot light indicators.
Communications	
72EE2	Offers remote Ethernet monitoring via open Mod bus and SNMP protocols, email notifications and embedded monitoring web pages. (Catalog No. 5170 for stand-alone product).
107G	Provides Building Monitoring Systems with transfer switch, bypass, and load power metering information in Modbus TCP/IP, BACnet IP, and SNMP Protocols. Compatible with any Accessory 150 Technology Package or 72EE2.
Surge Protection : ASCO 430 TVSS, rated 200 kA per phase	
73CC1	Normal source protection. (3Ø, 4wire WYE)
73CC2	Emergency source protection. (3Ø, 4wire WYE)
73CC3	Load side protection. (3Ø, 4wire WYE)
Special Applications	
29A	Manual selector switch for designating one of two utility feeds as the preferred source.
111A	Generator - to - Generator for Standby Applications
125A	Seismic Certification to International Building Code for electrical equipment
131	Certification of compliance with the American Recovery & Reinvestment Act (Buy American Provision)
Bypass-Isolation Switch Options	
14A1	Auxiliary contact to close in "Bypass to Normal" position.
14B1	Auxiliary contact to close in "Bypass to Emergency" position.
14T	Bypass Auxiliary contact closed when bypass switch is in auto position.
14U	Isolation Auxiliary contact closed when isolation handle is in closed position.
14V	Isolation Auxiliary contact closed when isolation handle is in open position.
82E	LED Bypass status indicator, optional on G frame, 1600 to 4000 amps only. Standard for all other switches.
Metering	
135L	ASCO Digital Power Meter monitors load source voltage, frequency, and current and calculating Power, Energy, and Power Factor.
135SB	ASCO Digital Power Meter monitors load source voltage, frequency, and current and calculating Power, Energy, and Power Factor. With additional IO for bypass position indication through communications.
Heater	
44A	120VAC, 208-240VAC and/or 440-480VAC Accessory 44 Strip heater designed to keep humidity and/or temperature inside ATS enclosure within acceptable levels. Includes mounting bracket with strip heater, thermostat, and terminal block.
Bundles	
150A	ASCO Digital Power Meter (Acc. 135L), Backup Power Source (Acc. 1PS1), Communications Module (Acc. 72EE2)
150B	5210 Power Meter with Moxa IO (Acc. 135SB), Backup Power Source (Acc. 1PS1), Comm. Module (Acc. 72EE2)

Withstand and Close-on Ratings

Withstand and Close-on Ratings for all 7000 SERIES Power Transfer Switches, including 0.5 second (30-cycle) designs.

Frame	Switch Rating (Amps)		Current Limiting Fuses				Specific Breaker			Time Based				Short Time Ratings[3] (sec)							
														480V Max.				600V Max.			
	Transfer Switches	Bypass Switches	480V Max.	600V Max.	Max Size, A	Class	240V Max.	480V Max.	600V Max.	Time (sec)	240V Max.	480V Max.	600V Max.	.13	.2	.3	.5	.1	.13	.3	.5
D	30	-	100kA	-	300	J	22kA	25kA	10kA	0.025	10kA	10kA	10kA	-				-			
			200kA	35kA	200	J															
			35kA	35kA	200	RK1															
D	70, 100	-	35kA	35kA	200	RK1	150kA	85kA	25kA	0.025	10kA	10kA	10kA	-				-			
			200kA	35kA	200	J															
D	150	-	35kA	35kA	200	RK1	150kA	85kA	25kA	0.025	10kA	10kA	10kA	-				-			
			200kA	35kA	200	J															
D	200	-	200kA	35kA	200	J	200kA	85kA	14kA	0.025	10kA	10kA	10kA	-				-			
			35kA	35kA	200	RK1															
D	230	-	100kA	-	300	J	200kA	85kA	14kA	0.025	10kA	10kA	-	-				-			
E	260, 400	-	200kA	-	600	J	65kA	42kA	22kA	0.05	35kA	35kA	22kA	-				-			
J	150, 200, 230, 260	150, 200, 230, 260	200kA	200kA	600	J	200kA	200kA	100kA	0.05	65kA	42kA[5]	35kA	7.5kA		-		-			
					800	L															
J	400	400	200kA	200kA	600	J	200kA	200kA	100kA	0.05	65kA	42kA[5]	35kA	7.5kA		-		-			
					800	L															
J	600	600	200kA	200kA	800	L	200kA	200kA	100kA	0.05	65kA	42kA[5]	35kA	7.5kA[9]		-		-			
			200kA	200kA	600	J															
H[8]	600	600	200kA	200kA	1600	L	65kA	150kA[6]	65kA	0.05	50kA	50kA	50kA	36kA			-	36kA			-
P[8]	600	600	200kA	200kA	1600	L	65kA	150kA[6]	65kA	0.05	50kA	50kA	50kA	36kA			30kA	36kA			-
P[8]	800	800 - 1200	200kA	200kA	1600	L	65kA	150kA[6]	65kA	0.05	50kA	50kA	50kA	36kA			30kA	36kA			-
H	800 - 1200	800 - 1200	200kA	200kA	1600[4]	L	65kA	150kA	65kA	0.05	50kA	50kA	50kA	36kA			-	36kA			-
Q[8]	600-1600	600-1600	200kA	200kA	2000	L	65kA	65kA	65kA	0.05	65kA	65kA	65kA	50kA				50kA			
S[8]	800 - 1200	800 - 1200	200kA	200kA	2500	L	100kA	100kA	65kA	0.05	100kA	100kA	65kA	65kA				65kA			
G[8]	1000 - 1200	1000 - 1200	200kA	200kA	2000	L	85kA	85kA	85kA	0.05	85kA	85kA	85kA	-				-			
G	1600 - 2000 (Front Connected TS Only)		200kA	200kA	2500	L	85kA	85kA	85kA	0.05	85kA	85kA	85kA	42kA			36kA	-			
G[8]	1600 - 2000	1600 - 2000	200kA	200kA	3000	L	200kA	200kA	100kA	0.05	100kA	100kA	100kA	42kA			36kA	42kA			-
S[8]	1600 - 2000	1600 - 2000	200kA	200kA	2500	L	100kA	100kA	85kA	0.05	100kA	100kA	85kA	85kA			65kA	85kA			65kA
G	2600 - 3000	2600 - 3000	200kA	200kA	4000	L	125kA[6]	125kA[6]	100kA	0.05	100kA	100kA	100kA	42kA			36kA	42kA			-
G[8]	3200	-	200kA	-	4000	L	100kA	100kA	-	0.05	100kA	100kA	-	-				-			
G	4000	4000	200kA	200kA	5000	L	100kA	100kA	100kA	0.05	100kA	100kA	100kA	85KA	65kA			65kA			
U[8]	2600 - 4000	2600 - 4000	200kA	200kA	5000	L	125kA	125kA	125kA	0.05	125kA	125kA	125kA	100kA				100kA			

Notes:

1. All WCR values indicated are tested in accordance with the requirements of UL 1008, 7th Edition. See ASCO Pub. 1128 for more WCR information
2. Application requirements may permit higher WCR for certain switch sizes.
3. Short Time ratings are provided for applications involving circuit breakers that utilize trip delay settings for system selective coordination
4. Max fuse rating is 1200A on front connected H frame switches
5. Switches utilizing overlapping neutral (code "C") have 35kA, 0.050 Sec time based rating at 480V Max
6. Rating shown is for Bypass switches only, Transfer Switch rating is 100kA for the G frame and 65kA max for the H and P frames. See ASCO Pub. 1128.
7. See ASCO for Service Entrance Switch ratings
8. These frames are only available on the 7000 Series product
9. Short Time Rating applies to 600A Bypass switch only, the 600A Transfer Switch does not have a Short Time Rating

All units are RMS Symmetrical Amperes.

All Withstand and Close-on Rating (WCR) values are established by testing in accordance with UL 1008. For the latest ratings, including transfer switch ratings when used with specific circuit breakers, see **ASCO Publication 1128** for more WCR information.

Application characteristics may permit higher WCRs for certain switch sizes.
Contact ASCO Power Technologies for more information.

Contact ASCO for Service Entrance Switch ratings.

Power Knowledge

UL 1008 Transfer Switch Withstand and Closing Ratings

Performance Testing for Transfer Switches

Additional 7000 SERIES Transfer Switch Information

Transfer Switches	Controls	Technical Information	
Bypass-Isolation	Group 5 Controller & Power Control Center	Drawings	Withstand and Closing Ratings
Service Entrance		Wiring Diagrams	Weights, Dimensions & Ordering Info

Life Is On | Schneider Electric

ASCO Power Technologies - Global Headquarters
160 Park Avenue
Florham Park, NJ 07932
Tel: 800 800 ASCO

www.ascopower.com
customercare@ascopower.com

© 2025 ASCO Power Technologies. All Rights Reserved. Life Is On Schneider Electric is a trademark and the property of Schneider Electric SE, its subsidiaries and affiliated companies.
Publication 3040 R25. Printed in the U.S.A.