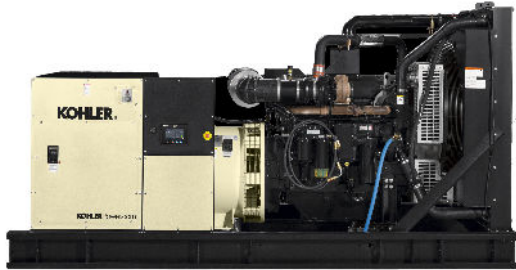

Generator



Kohler Model: 350REOZJD

This diesel generator set equipped with a 4M4019 alternator operating at 120/208 volts is rated for 350 kW/438 kVA. Output amperage: 1214

Standard Features:

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- Approved for use with certified renewable Hydrotreated Vegetable Oil (HVO) / Renewable Diesel (RD) fuels compliant with EN15940/ASTM D975.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- The 60 Hz generator set offers a UL 2200 listings.
- The generator set accepts rated load in one step.
- The 60 Hz emergency generator set meets NFPA 110, Level 1, when equipped with the necessary accessories and installed per NFPA standards.
- A one-year limited warranty covers all systems and components. Two-and five-year extended warranties are also available.
- Tier 3 EPA-certified for Stationary Emergency Applications
- Alternator Protection
- Battery Rack and Cables
- Customer Connection (standard with Decision-Maker 6000 controller only)
- Local Emergency Stop Switch
- Oil Drain Extension
- Operation and Installation Literature

Other Features:

- Kohler designed controllers for guaranteed system integration and remote communication.
- The low coolant level shutdown prevents overheating (standard on radiator models only). Integral vibration isolation eliminates the need for under-unit vibration spring isolators.
- An electronic, isochronous governor delivers precise frequency regulation.
- Mount up to four circuit breakers to allow circuit protection of selected priority loads.

Alternator Features:

- The pilot-excited, permanent-magnet (PM) alternator provides superior short-circuit capability.
- The brushless, rotating-field alternator has broad range reconnectability.

Qty	Description																																																														
5	350REOZJD Generator System																																																														
	350REOZJD Generator Set																																																														
	Includes the following:																																																														
	<table border="0"> <tr> <td data-bbox="418 672 873 703">Literature Languages</td> <td data-bbox="990 672 1304 703">English</td> </tr> <tr> <td data-bbox="418 703 873 735">Approvals and Listings</td> <td data-bbox="990 703 1304 735">UL2200 Listing</td> </tr> <tr> <td data-bbox="418 735 873 766">Engine</td> <td data-bbox="990 735 1304 766">350REOZJD, 24V, 60Hz</td> </tr> <tr> <td data-bbox="418 766 873 798">Nameplate Rating</td> <td data-bbox="990 766 1304 798">Standby 130C Rise</td> </tr> <tr> <td data-bbox="418 798 873 829">Voltage</td> <td data-bbox="990 798 1304 829">60Hz, 120/208V, Wye, 3Ph, 4W</td> </tr> <tr> <td data-bbox="418 829 873 861">Alternator</td> <td data-bbox="990 829 1304 861">4M4019</td> </tr> <tr> <td data-bbox="418 861 873 892">Cooling System</td> <td data-bbox="990 861 1304 892">Unit Mounted Radiator, 50C</td> </tr> <tr> <td data-bbox="418 892 873 924">Skid and Mounting</td> <td data-bbox="990 892 1304 924">Skid</td> </tr> <tr> <td data-bbox="418 924 873 955">Air Intake</td> <td data-bbox="990 924 1304 955">Standard Duty</td> </tr> <tr> <td data-bbox="418 955 873 987">Controller</td> <td data-bbox="990 955 1304 987">APM402</td> </tr> <tr> <td data-bbox="418 987 873 1018">Enclosure Type</td> <td data-bbox="990 987 1304 1018">Sound</td> </tr> <tr> <td data-bbox="418 1018 873 1050">Enclosure Material</td> <td data-bbox="990 1018 1304 1050">Steel</td> </tr> <tr> <td data-bbox="418 1050 873 1081">Fuel Tank Type</td> <td data-bbox="990 1050 1304 1081">State</td> </tr> <tr> <td data-bbox="418 1081 873 1113">Fuel Runtime (Approx.)</td> <td data-bbox="990 1081 1304 1113">24 Hours</td> </tr> <tr> <td data-bbox="418 1113 873 1144">Subbase Fuel Tank Capacity</td> <td data-bbox="990 1113 1304 1144">774 Gallons</td> </tr> <tr> <td data-bbox="418 1144 873 1176">Starting Aids, Installed</td> <td data-bbox="990 1144 1304 1176">2500W,90-120V,1Ph,w/Valves</td> </tr> <tr> <td data-bbox="418 1176 873 1207">Electrical Accy.,Installed</td> <td data-bbox="990 1176 1304 1207">Battery, 2/12V, Wet</td> </tr> <tr> <td data-bbox="418 1207 873 1239">Electrical Accy.,Installed</td> <td data-bbox="990 1207 1304 1239">Battery Charger, 10A</td> </tr> <tr> <td data-bbox="418 1239 873 1270">Electrical Accy.,Installed</td> <td data-bbox="990 1239 1304 1270">Run Relay</td> </tr> <tr> <td data-bbox="418 1270 873 1302">Electrical Accy.,Installed</td> <td data-bbox="990 1270 1304 1302">2 Input/5 OutputModule</td> </tr> <tr> <td data-bbox="418 1302 873 1333">Rating, LCB 1 Right</td> <td data-bbox="990 1302 1304 1333">100% Rated</td> </tr> <tr> <td data-bbox="418 1333 873 1365">Amps, LCB 1 Right</td> <td data-bbox="990 1333 1304 1365">1200</td> </tr> <tr> <td data-bbox="418 1365 873 1396">Trip Type, LCB 1 Right</td> <td data-bbox="990 1365 1304 1396">Electronic, LSI</td> </tr> <tr> <td data-bbox="418 1396 873 1428">LCB 1 Right Interrupt Rating</td> <td data-bbox="990 1396 1304 1428">35kA at 480V</td> </tr> <tr> <td data-bbox="418 1428 873 1459">Frame, LCB 1 Right</td> <td data-bbox="990 1428 1304 1459">PG</td> </tr> <tr> <td data-bbox="418 1459 873 1491">Position, LCB 1 Right</td> <td data-bbox="990 1459 1304 1491">1</td> </tr> <tr> <td data-bbox="418 1491 873 1522">Fuel Lines, Installed</td> <td data-bbox="990 1491 1304 1522">Flexible Fuel Lines</td> </tr> <tr> <td data-bbox="418 1522 873 1554">Exceeds LTL Shipping Height</td> <td data-bbox="990 1522 1304 1554">Add'l Shipping Charge Accepted</td> </tr> <tr> <td data-bbox="418 1554 873 1585">Miscellaneous Accy,Installed</td> <td data-bbox="990 1554 1304 1585">Coolant in Genset</td> </tr> <tr> <td data-bbox="418 1585 873 1617">Warranty</td> <td data-bbox="990 1585 1304 1617">5 Year Comprehensive</td> </tr> <tr> <td data-bbox="418 1617 873 1648">Testing, Additional</td> <td data-bbox="990 1617 1304 1648">Power Factor Test,0.8,3Ph Only</td> </tr> </table>	Literature Languages	English	Approvals and Listings	UL2200 Listing	Engine	350REOZJD, 24V, 60Hz	Nameplate Rating	Standby 130C Rise	Voltage	60Hz, 120/208V, Wye, 3Ph, 4W	Alternator	4M4019	Cooling System	Unit Mounted Radiator, 50C	Skid and Mounting	Skid	Air Intake	Standard Duty	Controller	APM402	Enclosure Type	Sound	Enclosure Material	Steel	Fuel Tank Type	State	Fuel Runtime (Approx.)	24 Hours	Subbase Fuel Tank Capacity	774 Gallons	Starting Aids, Installed	2500W,90-120V,1Ph,w/Valves	Electrical Accy.,Installed	Battery, 2/12V, Wet	Electrical Accy.,Installed	Battery Charger, 10A	Electrical Accy.,Installed	Run Relay	Electrical Accy.,Installed	2 Input/5 OutputModule	Rating, LCB 1 Right	100% Rated	Amps, LCB 1 Right	1200	Trip Type, LCB 1 Right	Electronic, LSI	LCB 1 Right Interrupt Rating	35kA at 480V	Frame, LCB 1 Right	PG	Position, LCB 1 Right	1	Fuel Lines, Installed	Flexible Fuel Lines	Exceeds LTL Shipping Height	Add'l Shipping Charge Accepted	Miscellaneous Accy,Installed	Coolant in Genset	Warranty	5 Year Comprehensive	Testing, Additional	Power Factor Test,0.8,3Ph Only
Literature Languages	English																																																														
Approvals and Listings	UL2200 Listing																																																														
Engine	350REOZJD, 24V, 60Hz																																																														
Nameplate Rating	Standby 130C Rise																																																														
Voltage	60Hz, 120/208V, Wye, 3Ph, 4W																																																														
Alternator	4M4019																																																														
Cooling System	Unit Mounted Radiator, 50C																																																														
Skid and Mounting	Skid																																																														
Air Intake	Standard Duty																																																														
Controller	APM402																																																														
Enclosure Type	Sound																																																														
Enclosure Material	Steel																																																														
Fuel Tank Type	State																																																														
Fuel Runtime (Approx.)	24 Hours																																																														
Subbase Fuel Tank Capacity	774 Gallons																																																														
Starting Aids, Installed	2500W,90-120V,1Ph,w/Valves																																																														
Electrical Accy.,Installed	Battery, 2/12V, Wet																																																														
Electrical Accy.,Installed	Battery Charger, 10A																																																														
Electrical Accy.,Installed	Run Relay																																																														
Electrical Accy.,Installed	2 Input/5 OutputModule																																																														
Rating, LCB 1 Right	100% Rated																																																														
Amps, LCB 1 Right	1200																																																														
Trip Type, LCB 1 Right	Electronic, LSI																																																														
LCB 1 Right Interrupt Rating	35kA at 480V																																																														
Frame, LCB 1 Right	PG																																																														
Position, LCB 1 Right	1																																																														
Fuel Lines, Installed	Flexible Fuel Lines																																																														
Exceeds LTL Shipping Height	Add'l Shipping Charge Accepted																																																														
Miscellaneous Accy,Installed	Coolant in Genset																																																														
Warranty	5 Year Comprehensive																																																														
Testing, Additional	Power Factor Test,0.8,3Ph Only																																																														
5	NEC Remote, E-Stop																																																														
5	Lit Kit, General Maint., 350REOZJD																																																														