




Ratings Range

		60 Hz	50 Hz
Standby:	kW	975-1020	820-912
	kVA	1219-1275	1025-1140
Prime:	kW	890-925	768-832
	kVA	1113-1156	960-1040

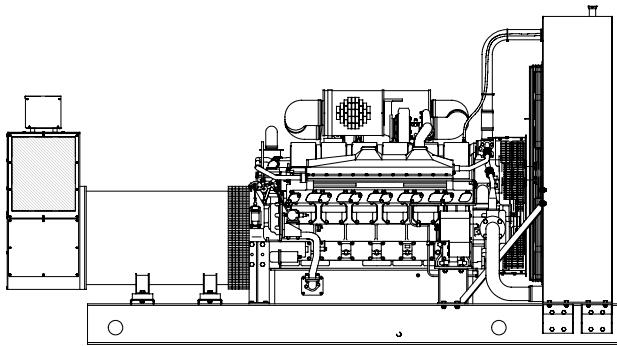

Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- The 60 Hz generator set offers a UL 2200 listing.
- At 60 Hz, the generator set accepts rated load in one step.
- The 60 Hz generator set meets NFPA 110, Level 1, when equipped with the necessary accessories and installed per NFPA standards.
- The generator set complies with ISO 8528-5, Class G3, requirements for transient performance.
- A one-year limited warranty covers all systems and components. Two-, five-, and ten-year extended warranties are also available.
- Alternator features:
 - The pilot-excited, permanent magnet (PM) alternator provides superior short-circuit capability.
 - The brushless, rotating-field alternator has broadrange reconnectability.
- Other features:
 - Controllers are available for all applications. See controller features inside.
 - The low coolant level shutdown prevents overheating (standard on radiator models only).
 - The generator set-to-skid mounting options are either integral vibration isolation or direct mounting with spring isolators.
 - An electronic, isochronous governor delivers precise frequency regulation.

Generator Set Ratings

Alternator	Voltage	150°C Rise Standby Rating				130°C Rise Standby Rating				125°C Rise Prime Rating				105°C Rise Prime Rating			
		Ph	Hz	kW/kVA	Amps	kW/kVA	Amps	kW/kVA	Amps	kW/kVA	Amps	kW/kVA	Amps	kW/kVA	Amps		
5M4044	240/416	3	60	1010/1263	1752	975/1219	1691	920/1150	1596	890/1113	1544						
	277/480	3	60	1020/1275	1534	1020/1275	1534	925/1156	1391	925/1156	1391						
	220/380	3	50	896/1120	1702	844/1055	1603	816/1020	1550	768/960	1459						
	230/400	3	50	904/1130	1631	848/1060	1530	824/1030	1487	768/960	1386						
	240/416	3	50	844/1055	1464	820/1025	1423	808/1010	1402	768/960	1332						
7M4046	220/380	3	50	912/1140	1732	912/1140	1732	832/1040	1580	832/1040	1580						
	230/400	3	50	912/1140	1645	912/1140	1645	832/1040	1501	832/1040	1501						
	240/416	3	50	912/1140	1582	912/1140	1582	832/1040	1443	832/1040	1443						
7M4170	220/380	3	60	1010/1263	1918	1010/1263	1918	920/1150	1747	920/1150	1747						
7M4282	347/600	3	60	1010/1263	1215	1010/1263	1215	920/1150	1107	920/1150	1107						
7M4284	347/600	3	60	1010/1263	1215	1010/1263	1215	920/1150	1107	920/1150	1107						

RATINGS: All three-phase units are rated at 0.8 power factor. **Standby Ratings:** The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. **Prime Power Ratings:** At varying load, the number of generator set operating hours is unlimited. A 10% overload capacity is available for one hour in twelve. Ratings are in accordance with ISO-8528-1 and ISO-3046-1. For limited running time and continuous ratings, consult the factory. Obtain technical information bulletin (TIB-101) for ratings guidelines, complete ratings definitions, and site condition derates. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Alternator Specifications

Specifications	Alternator
Type	4-Pole, Rotating-Field
Exciter type	Brushless, Permanent-Magnet Pilot Exciter
Voltage regulator	Solid State, Volts/Hz
Insulation:	NEMA MG1
Material	Class H, Synthetic, Nonhygroscopic
Temperature rise	130°C, 150°C Standby
Bearing: quantity, type	1, Sealed
Coupling	Flexible Disc
Amortisseur windings	Full
Rotor balancing	125% 60 Hz, 150% 50 Hz
Voltage regulation, no-load to full-load (with <0.5% drift due to temp. variation)	3-Phase Sensing, $\pm 0.25\%$
One-step load acceptance	100% of Rating
Unbalanced load capability	100% of Rated Standby Current
Peak motor starting kVA:	(35% dip for voltages below)
480 V, 380 V	5M4044 (4 bus bar)
380 V	7M4046 (4 bus bar)
380 V	7M4170 (4 bus bar)
600 V	7M4282 (4 bus bar)
600 V	7M4284 (4 bus bar)

- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting.
- Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- Sustained short-circuit current enabling downstream circuit breakers to trip without collapsing the alternator field.
- Self-ventilated and dripproof construction.
- Superior voltage waveform from two-thirds pitch windings and skewed stator.
- Digital solid-state, volts-per-hertz voltage regulator with $\pm 0.25\%$ no-load to full-load regulation.
- Brushless alternator with brushless pilot exciter for excellent load response.

Application Data

Engine

Engine Specifications	60 Hz	50 Hz
Engine manufacturer, model	Mitsubishi S12H-Y1PTA-3	S12H-PTA-4
Engine model	D1000 37.1A60	D1000 37.1A50
Engine type	4-Cycle, Turbocharged	
Cylinder arrangement	12 V	
Displacement, L (cu. in.)	37.11 (2265)	
Bore and stroke, mm (in.)	150 x 175 (5.91 x 6.89)	
Compression ratio	14.5:1	
Piston speed, m/min. (ft./min.)	630 (2067)	528 (1732)
Main bearings: quantity, type	7, Precision Half-Shell	
Rated rpm	1800	1500
Max. power at rated rpm, kWm (BHP)	1140 (1528)	1020 (1367)
Cylinder head material	Cast Iron	
Crankshaft material	Forged Steel	
Governor type	Electronic	
Frequency regulation, no-load to full-load	Isochronous	
Frequency regulation, steady state	$\pm 0.25\%$	
Frequency	Fixed	
Air cleaner type, all models	Dry	

Exhaust

Exhaust System	60 Hz	50 Hz
Exhaust manifold type	Dry	
Exhaust flow at rated kW, m ³ /min. (cfm)	266 (9392)	225 (7945)
Exhaust temperature at rated kW, dry exhaust, °C (°F)	546 (1015)	562 (1044)
Maximum allowable back pressure, kPa (in. Hg)	5.9 (1.7)	
Exhaust outlet size at engine hookup, mm (in.)	See ADV drawing	

Engine Electrical

Engine Electrical System	60 Hz	50 Hz
Battery charging alternator:		
Ground (negative/positive)	Negative	
Volts (DC)	24	
Ampere rating	30	
Starter motor rated voltage (DC)	Dual, 24	
Battery, recommended cold cranking amps (CCA):		
Quantity, CCA rating each	Two, 1150	
Battery voltage (DC)	12	

Fuel

Fuel System	60 Hz	50 Hz
Fuel supply line, min. ID, mm (in.)	25 (1.0)	
Fuel return line, min. ID, mm (in.)	25 (1.0)	
Max. lift, engine-driven fuel pump, m (ft.)	1 (3)	
Max. fuel flow, Lph (gph)	1750 (462)	1500 (396)
Max. fuel pump restriction, kPa (in. Hg)	15 (4.3)	
Fuel filter: quantity, type	4, Cartridge	
Recommended fuel	#2 Diesel	

Lubrication

Lubricating System	60 Hz	50 Hz
Type	Full Pressure	
Oil pan capacity, L (qt.)	180 (190)	
Oil pan capacity with filter, L (qt.)	200 (211)	
Oil filter: quantity, type	5, Cartridge	
Oil cooler	Water-Cooled	

Application Data

Cooling

Radiator System	60 Hz	50 Hz
Ambient temperature, °C (°F)*	50 (122)	
Engine jacket water capacity, L (gal.)	100 (26.4)	
Radiator system capacity, including engine, L (gal.)	288 (76)	
Engine jacket water flow, Lpm (gpm)	1450 (383)	1200 (317)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	734 (41752)	620 (35282)
Water pump type	Centrifugal	
Fan diameter, including blades, mm (in.)	1524 (60)	
Fan, kWm (HP)	41.8 (56)	
Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H ₂ O)	0.125 (0.5)	

* Enclosure with enclosed silencer reduces ambient temperature capability by 5°C (9°F).

Remote Radiator System†	60 Hz	50 Hz
Exhaust manifold type	Dry	
Connection sizes:	Class 150 ANSI Flange	
Water inlet, mm (in.)	191 (7.5) Bolt Circle	
Water outlet, mm (in.)	191 (7.5) Bolt Circle	
Static head allowable above engine, kPa (ft. H ₂ O)	88 (29.4)	

† Contact your local distributor for cooling system options and specifications based on your specific requirements.


Operation Requirements

Air Requirements	60 Hz	50 Hz
Radiator-cooled cooling air, m ³ /min. (scfm)‡	1359 (48000)	
Cooling air required for generator set when equipped with city water cooling or remote radiator, based on 14°C (25°F) rise, m ³ /min. (scfm)‡	507 (17900)	461 (16300)
Combustion air, m ³ /min. (cfm)	101 (3566)	85 (3001)
Heat rejected to ambient air:		
Engine, kW (Btu/min.)	88 (5010)	74 (4234)
Alternator, kW (Btu/min.)	54 (3050)	53 (3020)

‡ Air density = 1.20 kg/m³ (0.075 lbm/ft³)

Fuel Consumption	60 Hz	50 Hz
Diesel, Lph (gph) at % load	Standby Rating	
100%	283 (74.9)	239 (63.1)
75%	211 (55.8)	181 (47.7)
50%	147 (38.9)	125 (33.1)
25%	82 (21.7)	68 (18.1)
Diesel, Lph (gph) at % load	Prime Rating	
100%	256 (67.6)	217 (57.3)
75%	194 (51.2)	165 (43.7)
50%	137 (36.2)	116 (30.6)
25%	80 (21.1)	65 (17.3)

Controllers




Decision-Maker® 3+ Controller

Provides system control and monitoring capabilities.

- Analog display using AC meters, engine gauges, and voltage selector switch.
- 16-light status, warning, and shutdown fault annunciation.
- Alarm horn, emergency stop switch, and hour meter features.
- Remote annunciation options.
- Remote start and prime power options.

Refer to G6-30 for additional controller features and accessories.




Decision-Maker® 550 Controller

Provides advanced control, system monitoring, and system diagnostics with remote monitoring capabilities.

- Digital display and keypad provide easy local data access
- Measurements are selectable in metric or English units
- Remote communication thru a PC via network or modem configuration
- Controller supports Modbus® protocol
- Integrated voltage regulator with ±0.25% regulation
- Built-in alternator thermal overload protection
- NFPA 110 Level 1 capability

Refer to G6-46 for additional controller features and accessories.



Decision-Maker® 6000 Paralleling Controller

Provides advanced control, system monitoring, and system diagnostics with remote monitoring capabilities for paralleling multiple generator sets.

- Paralleling capability with first-on logic, synchronizer, kW and kVAR load sharing, and protective relays
- Digital display and keypad provide easy local data access
- Measurements are selectable in metric or English units
- Remote communication thru a PC via network or modem configuration
- Controller supports Modbus® protocol
- Integrated voltage regulator with ±0.25% regulation
- Built-in alternator thermal overload protection
- NFPA 110 Level 1 capability

Refer to G6-107 for additional controller features and accessories.

Standard Features

- Alternator Protection (standard with Decision-Maker® 550 and 6000)
- Oil Drain Extension
- Operation and Installation Literature

Available Accessories

Approvals and Listings

CSA Approval
 UL 2200 Listing

Enclosed Unit

Sound Enclosure (with roof-mounted hospital silencer)
 Weather Enclosure (with roof-mounted critical silencer)

Open Unit

Exhaust Silencer, Hospital (kits: PA-354911, PA-361619)
 Exhaust Silencer, Critical (kits: PA-354898, PA-354901)
 Flexible Exhaust Connector, Stainless Steel

Fuel System

Flexible Fuel Lines
 Fuel Pressure Gauge
 Fuel/Water Separator

Controller

Common Failure Relay
 Communication Products and PC Software (Decision-Maker® 550 and 6000 only)
 Customer Connection (Decision-Maker® 3+ only)
 Dry Contact Kit (isolated alarm)
 Engine Prealarm Sender
 Remote Annunciator Panel
 Remote Audiovisual Alarm Panel
 Remote Emergency Stop
 Remote Mounting Cable (Decision-Maker® 3+ only)
 Run Relay Kit

Cooling System

Block Heater; 9000 W, 208 V, (Select 1 Ph or 3 Ph)
 Block Heater; 9000 W, 240 V, (Select 1 Ph or 3 Ph)
 Block Heater; 9000 W, 480 V, (Select 1 Ph or 3 Ph)
 Recommended for Ambient Temperatures Below 20°C (68°F)
 Radiator Duct Flange
 Remote Radiator Setup

Electrical System

Alternator Strip Heater
 Battery
 Battery Charger, Equalize/Float Type
 Battery Heater
 Battery Rack and Cables
 Bus Bar Kits (standard on 7M alternators, 380–600 volt only)
 Line Circuit Breaker (NEMA type 1 enclosure)
 Line Circuit Breaker with Shunt Trip (NEMA type 1 enclosure)
 Safeguard Breaker (Decision-Maker® 3+ controller only)

Paralleling System

Reactive Droop Compensator (Decision-Maker® 3+ only)
 Remote Voltage Adjustment Control
 Voltage Regulator Relocation (Decision-Maker® 3+ controller only)
 Voltage Sensing (Decision-Maker® 6000 controller only)

Miscellaneous

Air Cleaner, Heavy Duty
 Air Cleaner Restriction Indicator
 Rated Power Factor Testing
 Solid Mounting/Spring Isolators

Literature

General Maintenance
 NFPA 110
 Overhaul
 Production

Warranty

2-Year Basic
 2-Year Prime
 5-Year Basic
 5-Year Comprehensive
 10-Year Major Components


Miscellaneous Accessories

Dimensions and Weights

Overall Size, L x W x H, max., mm (in.):	4645 x 2047 x 2540 (182.9 x 80.6 x 100.0)
with 5M4044	
with 7M4046	4535 x 2047 x 2540 (178.5 x 80.6 x 100.0)
with 7M4170, 7M4282, 7M4284	4433 x 2047 x 2540 (174.5 x 80.6 x 100.0)

Weight (radiator model), wet, max., kg (lb.):

9798 (21600)

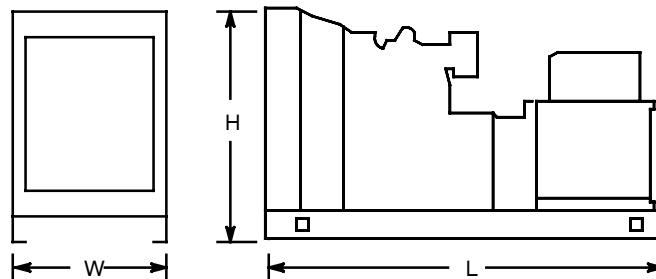

Note: This drawing is provided for reference only and should not be used for planning the installation. Contact your local distributor for more detailed information.

DISTRIBUTED BY: