KOHLER

Model: 500REOZJC

208-600 V

Diesel




Tier 2 EPA-Certified for Stationary Emergency Applications

Ratings Range

60 Hz 400-510

Standby: kW 400-510 kVA 500-638



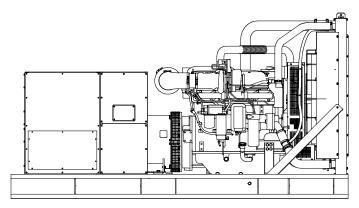

Standard Features

- Kohler Co. provides one-source responsibility for the generating system and accessories.
- Approved for use with certified renewable Hydrotreated Vegetable Oil (HVO) / Renewable Diesel (RD) fuels compliant with EN15940 / ASTM D975.
- The generator set and its components are prototype-tested, factory-built, and production-tested.
- The 60 Hz generator set offers a UL 2200 listing.
- The generator set accepts rated load in one step.
- The 60 Hz emergency generator set meets NFPA 110, Level 1, when equipped with the necessary accessories and installed per NFPA standards.
- A one-year limited warranty covers all generator set systems and components. Two- and five-year extended limited warranties are also available.
- Alternator features:
 - The pilot-excited, permanent magnet (PM) alternator provides superior short-circuit capability.
 - The brushless, rotating-field alternator has broadrange reconnectability.
- Other features:
 - Kohler designed controllers for one-source system integration and remote communication. See Controllers on page 3.
 - The low coolant level shutdown prevents overheating (standard on radiator models only).
 - Integral vibration isolation eliminates the need for under-unit vibration spring isolators.
 - An electronic, isochronous governor delivers precise frequency regulation.
- Mount up to four circuit breakers to allow circuit protection of selected priority loads.

Generator Set Ratings

					Rise Rating	130°C Standby	
Alternator	Voltage	Ph	Hz	kW/kVA	Amps	kW/kVA	Amps
	120/208	3	60	450/563	1561	440/550	1527
	127/220	3	60	465/581	1525	465/581	1525
5144004	139/240	3	60	505/631	1519	475/594	1428
5M4024	220/380	3	60	400/500	760	400/500	760
	240/416	3	60	450/563	781	440/550	763
	277/480	3	60	505/631	759	475/594	714
	120/208	3	60	505/631	1752	475/594	1648
	127/220	3	60	505/631	1657	500/625	1640
5M4027	139/240	3	60	505/631	1519	505/631	1519
51014027	220/380	3	60	405/506	769	405/506	769
	240/416	3	60	505/631	876	475/594	824
	277/480	3	60	505/631	759	505/631	759
	120/208	3	60	510/638	1770	510/638	1770
	127/220	3	60	510/638	1673	510/638	1673
EM4000	139/240	3	60	510/638	1534	510/638	1534
5M4028	220/380	3	60	470/588	893	470/588	893
	240/416	3	60	510/638	885	510/638	885
	277/480	3	60	510/638	767	510/638	767
5M4270	347/600	3	60	505/631	607	505/631	607
5M4272	347/600	3	60	510/638	613	510/638	613

RATINGS: All three-phase units are rated at 0.8 power factor. Standby Ratings: The standby rating is applicable to varying loads for the duration of a power outage. There is no overload capability for this rating. Ratings are in accordance with ISO-8528-1 and ISO-3046-1. Obtain technical information bulletin (TIB-101) for ratings guidelines, complete ratings definitions, and site condition derates. The generator set manufacturer reserves the right to change the design or specifications without notice and without any obligation or liability whatsoever.

Alternator Specifications

Specifications		Alternator	
Туре		4-Pole, Rotating-Field	
Exciter type		Brushless, Permanent- Magnet, Pilot Exciter	
Leads: quantity,	type	10/12, Reconnectable 4, 600 V	
Voltage regulato	r	Solid State, Volts/Hz	
Insulation:		NEMA MG1	
Material		Class H, Synthetic, Nonhygroscopic	
Temperature rise		130°C, 150°C Standby	
Bearing: quantity, type		1, Sealed	
Coupling		Flexible Disc	
Amortisseur windings		Full	
Rotor balancing		125%	
Voltage regulation	on, no-load to full-load	Controller Dependent	
One-step load a	cceptance	100% of Rating	
Unbalanced load capability		100% of Rated Standby Current	
Peak motor starting kVA:		(35% dip for voltages below)	
480 V	5M4024 (10 lead)	1350	
480 V	5M4027 (12 lead)	2200	
480 V	5M4028 (10 lead)	2550	
600 V	5M4270 (4 lead)	1250	
600 V	5M4272 (4 lead)	1750	

- NEMA MG1, IEEE, and ANSI standards compliance for temperature rise and motor starting.
- Sustained short-circuit current of up to 300% of the rated current for up to 10 seconds.
- Sustained short-circuit current enabling downstream circuit breakers to trip without collapsing the alternator field.
- Self-ventilated and dripproof construction.
- Superior voltage waveform from a two-thirds pitch stator and skewed rotor.
- Brushless alternator with brushless pilot exciter for excellent load response.

Application Data

Engine

Engine Specifications Engine manufacturer John Deere Engine model 6135HFG75 Engine type 4-Cycle, Turbocharged, Charge Air-Cooled Cylinder arrangement 6, Inline Displacement, L (cu. in.) 13.5 (824) Bore and stroke, mm (in.) 132 x 165 (5.2 x 6.5) 16.0:1 Compression ratio Piston speed, m/min. (ft./min.) 594 (1949) Main bearings: quantity, type 7, Replaceable Insert Rated rpm 1800 Max. power at rated rpm, kWm (BHP) 563 (755) Crankshaft material Forged Steel Valve material Intake/Exhaust Nickel-Chromium Head Chromium-Silicone Stem JDEC Electronic L15 Governor: type, make/model Frequency regulation, no-load to full-load Isochronous ±0.25% Frequency regulation, steady state Fixed Air cleaner type, all models Dry

Exhaust

Exhaust System	
Exhaust manifold type	Dry
Exhaust flow at rated kW, m ³ /min. (cfm)	97.2 (3433)
Exhaust temperature at rated kW, dry exhaust, $^{\circ}$ C ($^{\circ}$ F)	524 (975)
Maximum allowable back pressure, kPa (in. Hg)	Min. 4 (1.2) Max. 9.8 (2.9)
Engine exhaust outlet size, mm (in.)	See ADV drawing

Engine Electrical

Engine Electrical System	
Battery charging alternator:	
Ground (negative/positive)	Negative
Volts (DC)	24
Ampere rating	60
Starter motor rated voltage (DC)	24
Battery, recommended cold cranking amps (CCA):	
Qty., CCA rating each	Two, 925
Battery voltage (DC)	12
Euol	

Fuel

Fuel System	
Fuel supply line, min. ID, mm (in.)	13 (0.50)
Fuel return line, min. ID, mm (in.)	10 (0.38)
Max. lift, fuel pump: type, m (ft.)	Electronic 2.1 (6.8)
Max. fuel flow, Lph (gph)	214.8 (56.7)
Max. return line restriction, kPa (in. Hg)	35 (10.3)
Fuel prime pump	Electronic
Fuel filter	
Secondary	2 Microns @ 98% Efficiency
Primary	10 Microns
Water Separator	Yes
Recommended fuel	#2 Diesel / HVO / RD

Lubrication

Lubricating System	
Туре	Full Pressure
Oil pan capacity, L (qt.) §	40.0 (42.3)
Oil pan capacity with filter, L (qt.) §	42.0 (44.4)
Oil filter: quantity, type §	1, Cartridge
Oil cooler	Water-Cooled
§ Kohler recommends the use of Kohler Genuine oil and filters.	

Application Data

Cooling

Radiator System	
Ambient temperature, °C (°F)*	50 (122)
Engine jacket water capacity, L (gal.)	18 (4.8)
Radiator system capacity, including engine, L (gal.)	67.2 (17.8)
Engine jacket water flow, Lpm (gpm)	400 (106)
Heat rejected to cooling water at rated kW, dry exhaust, kW (Btu/min.)	209 (11896)
Heat rejected to air charge cooler at rated kW, dry exhaust, kW (Btu/min.)	116 (6603)
Water pump type	Centrifugal
Fan diameter, including blades, mm (in.)	965 (38)
Fan, kWm (HP)	18 (24)
Max. restriction of cooling air, intake and discharge side of radiator, kPa (in. H_2O)	0.125 (0.5)

 Enclosure with internal silencer reduces ambient temperature capability by 5°C (9°F).

Operation Requirements

Air Requirements	
Radiator-cooled cooling air, m³/min. (scfm)†	435 (15400)
Cooling air required for generator set when equipped with city water cooling or remote radiator, based on 14°C (25°F) rise, m³/min. (cfm)†	279 (9867)
Combustion air, m ³ /min. (cfm)	38 (1342)
Heat rejected to ambient air:	
Engine, kW (Btu/min.)	38 (2163)
Alternator, kW (Btu/min.)	40 (2277)
when equipped with city water cooling or remote radiator, based on 14°C (25°F) rise, m³/min. (cfm)† Combustion air, m³/min. (cfm) Heat rejected to ambient air: Engine, kW (Btu/min.)	38 (1342) 38 (2163)


† Air density = $1.20 \text{ kg/m}^3 (0.075 \text{ lbm/ft}^3)$

Fuel Consumption**

Diesel, Lph (gph) at % load	Standby Rating
100%	134.5 (35.5)
75%	104.6 (27.6)
50%	75.3 (19.9)
25%	38.8 (10.2)

** Volumetric Fuel consumption is up to 4% higher when using HVO/RD than #2 ULSD.

Controllers



APM402 Controller

Provides advanced control, system monitoring, and system diagnostics for optimum performance and compatibility.

- Digital display and menu control provide easy local data access
- Measurements are selectable in metric or English units
- Remote communication thru a PC via network or serial configuration
- Controller supports Modbus® protocol
- Integrated hybrid voltage regulator with ±0.5% regulation
- Built-in alternator thermal overload protection
- NFPA 110 Level 1 capability

Refer to G6-161 for additional controller features and accessories.




APM603 Controller

Provides advanced control, system monitoring, and system diagnostics for optimum performance and compatibility.

- 7-inch graphic display with touch screen and menu control provides easy local data access
- Measurements are selectable in metric or English units
- Paralleling capability to control up to 8 generators on an isolated bus with first-on logic, synchronizer, kW and kVAR load sharing, and protective relays
 - Note: Parallel with other APM603 controllers only
- Generator management to turn paralleled generators off and on as required by load demand
- Load management to connect and disconnect loads as required
- Controller supports Modbus® RTU, Modbus® TCP, SNMP and BACnet®
- Integrated voltage regulator with ±0.25% regulation
- Built-in alternator thermal overload protection
- UL-listed overcurrent protective device
- NFPA 110 Level 1 capability

Refer to G6-162 for additional controller features and accessories.



Decision-Maker® 6000 Paralleling Controller

Provides advanced control, system monitoring, and system diagnostics with remote monitoring capabilities for paralleling multiple generator sets.

- Paralleling capability to control up to 8 generators on an isolated bus with first-on logic, synchronizer, kW and kVAR load sharing, and protective relays
- Note: Parallel with other Decision-Maker® 6000 controllers only

 Digital display and keypad provide easy local data access
- Measurements are selectable in metric or English units
- Remote communication thru a PC via network or modem configuration
- Controller supports Modbus® protocol
- Integrated voltage regulator with ±0.25% regulation
- Built-in alternator thermal overload protection
- NFPA 110 Level 1 capability

Refer to G6-107 for additional controller features and accessories.

 $\mathsf{Modbus}^{\otimes}$ is a registered trademark of Schneider Electric.

BACnet® is a registered trademark of ASHRAE.



KOHLER CO., Kohler, Wisconsin 53044 USA Phone 920-457-4441, Fax 920-459-1646 For the nearest sales and service outlet in the US and Canada, phone 1-800-544-2444 KOHLERPower.com

Stand	dard	l Feat	tures
-------	------	--------	-------

- Alternator Protection
- Battery Rack and Cables
- Customer Connection (standard with Decision-Maker® 6000 controller only)
- Local Emergency Stop Switch
- Oil Drain Extension
- Operation and Installation Literature

Available Options

	Circuit Breakers			
	Туре		Rating	
	Magnetic Trip		80%	
	Thermal Magnetic Trip Electronic Trip (LI)	Ц	100% Operation	
	Electronic Trip with	П	Manual	
	Short Time (LSI)	ō	Electrically Operated (for paralleling)	
	Electronic Trip with Ground Fault (LSIG)			
	Circuit Breaker Mounti	ing		
	Generator Mounted			
\vdash	Remote Mounted Bus Bar (for remote mou	ınta	d breakers)	
_	•		ounted Circuit Breakers	
	NEMA 1			
	NEMA 3R			
	Approvals and Listing	S		
	CSA Certified			
_	UL 2200 Listing			
	Hurricane Rated Enclos			
	IBC Seismic Certification HCAI Pre-Approval	1		
_				
	Enclosed Unit		d O blood E al Tarl Barbara	
Η			nd Subbase Fuel Tank Packages	
	Sound Enclosure Level 2 and Subbase Fuel Tank Packages Weather Enclosure and Subbase Fuel Tank Packages			
_	Open Unit	Our	baco i dei idim i denages	
\Box	Exhaust Silencer, Critica	al (ki	it: PA-354880)	
$\overline{\Box}$	Flexible Exhaust Conne	•	,	
_	Fuel System	,		
	Flexible Fuel Lines (Sele	ect r	ubber or stainless steel)	
	Controller			
	Common Failure Relay	and	APM603 controllers only)	
	Dry Contact (isolated ala		• ,	
_	(Decision-Maker® 6000			
	Two Input/Five Output M	1odu	ıle (APM402 controller only)	
	·		odule (APM603 controller only)	
	Remote Audiovisual Ala (Decision-Maker® 6000			
	Lockable Emergency St	op S	Switch	
	Remote Emergency Sto	p Sv	witch	
	Remote Serial Annuncia			
	• •		PM603, optional with others)	
	Manual Key Switch (API	งเลก	3 controller only)	

☐ Manual Speed Adjust (APM402 controller only)


	Block Heater, 2500 W, 90-120 V, 1 Ph Block Heater, 2500 W, 190-208 V, 1 Ph Block Heater, 2500 W, 210-240 V, 1 Ph
_	Block Heater, 2500 W, 380-480 V, 1 Ph Required for ambient temperatures below 0°C (32°F)
	Radiator Duct Flange
	Electrical System
	Generator Heater Battery Battery Charger, Equalize/Float Type Battery Heater
	Paralleling System Voltage Sensing
	Miscellaneous
	Air Cleaner, Heavy Duty Air Cleaner Restriction Indicator
	Crankcase Emissions Canister Engine Fluids Added
	Rated Power Factor Testing
	Literature
_	General Maintenance NFPA 110
<u> </u>	Overhaul
	Production
\Box	Warranty
_	2-Year Basic Limited Warranty 5-Year Basic Limited Warranty
ä	5-Year Comprehensive Limited Warranty

Dimensions and Weights

Cooling System

Overall Size, L x W x H, max., mm (in.): $3630 \times 1425 \times 1936$ (142.9 x 56.1 x 76.2) Weight (radiator model), wet, max., kg (lb.): 3883 (8560)

Note: See ADV drawing for specific dimensions based on accessory selections.

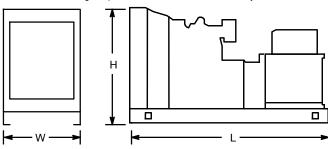

NOTE: This drawing is provided for reference only and should not be used for planning installation. Contact your local distributor for more detailed information.

DISTRIBUTED BY: