



GEP88-3

*Diesel Generator Set
Exclusively from your Cat® dealer*

Image shown may not reflect actual package

Output Ratings		
Generating Set Model - 3 Phase	Prime*	Standby*
400V, 50 Hz	80.0 kVA 64.0 kW	88.0 kVA 70.4 kW
480V, 60 Hz	90.0 kVA 72.0 kW	100.0 kVA 80.0 kW

* Refer to ratings definitions on page 4.
Ratings at 0.8 power factor.

Technical Data		
Engine Make & Model:	Perkins® 1104A-44TG2	
Alternator Model:	LL3114D	
Control Panel:	1002T	
Base Frame Type:	Heavy Duty Fabricated Steel	
Circuit Breaker Type:	3 Pole MCCB	
Frequency:	50 Hz	60 Hz
Engine Speed: RPM	1500	1800
Fuel Tank Capacity: litres (US gal)	219 (57.9)	
Fuel Consumption, Prime: l/hr (US gal/hr)	18.0 (4.8)	21.0 (5.5)
Fuel Consumption, Standby : l/hr (US gal/hr)	19.8 (5.2)	23.3 (6.2)

Engine Technical Data

Physical Data	
Manufacturer:	Perkins
Model:	1104A-44TG2
No. of Cylinders/Alignment:	4 / In Line
Cycle:	4 Stroke
Induction:	Turbocharged
Cooling Method:	Water
Governing Type:	Mechanical
Governing Class:	ISO 8528 G2
Compression Ratio:	17.25:1
Displacement: l (cu.in)	4.4 (268.5)
Bore/Stroke : mm (in)	105.0 (4.1)/127.0 (5.0)
Moment of Inertia: kg m ² (lb. in ²)	1.14 (3896)
Engine Electrical System:	
-Voltage/Ground:	12/Negative
-Battery Charger Amps:	65
Weight: kg (lb) - Dry:	463 (1021)
- Wet:	485 (1069)

Air System	50 Hz	60 Hz
Air Filter Type:	Replaceable Element	
Combustion Air Flow:		
m ³ /min (cfm)	-Standby: 5.1 (180)	6.5 (230)
	-Prime: 4.8 (170)	6.2 (219)
Max. Combustion Air Intake		
Restriction: kPa (in H ₂ O)	8.0 (32.1)	8.0 (32.1)
Radiator Cooling Air Flow:		
m ³ /min (cfm)	121.2 (4280)	140.4 (4958)
External Restriction to		
Cooling Air Flow: Pa (in H ₂ O)	120 (0.5)	120 (0.5)

Cooling System	50 Hz	60 Hz
Cooling System Capacity:		
l (US gal)	13.0 (3.4)	13.0 (3.4)
Water Pump Type:	Centrifugal	
Heat Rejected to Water &		
Lube Oil: kW (Btu/min)		
	-Standby: 51.0 (2900)	57.0 (3242)
	-Prime: 46.0 (2616)	53.0 (3014)
Heat Radiation to Room: Heat radiated from engine and alternator		
kW (Btu/min)	-Standby: 20.7 (1177)	22.1 (1257)
	-Prime: 18.9 (1075)	20.1 (1143)
Radiator Fan Load: kW (hp)	1.0 (1.3)	1.7 (2.3)
Cooling system designed to operate in ambient conditions up to 50°C (122°F). Contact your local Olympian™ dealer for power ratings at specific site conditions.		

Lubrication System	
Oil Filter Type:	Spin-On, Full Flow
Total Oil Capacity l (US gal):	8.0 (2.1)
Oil Pan l (US gal):	7.0 (1.8)
Oil Type:	API CG4 / CH4 15W-40
Cooling Method:	Water

Performance	50 Hz	60 Hz
Engine Speed: RPM	1500	1800
Gross Engine Power: kW (hp)		
-Standby:	80.7 (108.0)	93.0 (125.0)
-Prime:	73.4 (98.0)	84.5 (113.0)
BMEP: kPa (psi)		
-Standby:	1468.0 (212.9)	1409.0 (204.4)
-Prime:	1335.0 (193.6)	1280.0 (185.7)
Regenerative Power: kW	7.0	9.0

Fuel System				
Fuel Filter Type:	Replaceable Element			
Recommended Fuel:	Class A2 Diesel or BSEN590			
Fuel Consumption: l/hr (US gal/hr)				
	110% Load	100% Load	75% Load	50% Load
Prime				
50 Hz	19.8 (5.2)	18.0 (4.8)	13.6 (3.6)	9.5 (2.5)
60 Hz	23.3 (6.2)	21.0 (5.5)	16.1 (4.3)	11.6 (3.1)
Standby				
50 Hz		19.8 (5.2)	14.9 (3.9)	10.3 (2.7)
60 Hz		23.3 (6.2)	17.7 (4.7)	12.5 (3.3)
(based on diesel fuel with a specific gravity of 0.85 and conforming to BS2869, Class A2)				

Exhaust System	50 Hz	60 Hz
Silencer Type:	Industrial	
Silencer Model & Quantity:	EXSY1 (1)	
Pressure Drop Across		
Silencer System: kPa (in Hg)	1.17 (0.345)	1.97 (0.581)
Silencer Noise Reduction		
Level: dB	16	16
Max. Allowable Back		
Pressure: kPa (in. Hg)	10.0 (3.0)	15.0 (4.4)
Exhaust Gas Flow:		
m ³ /min (cfm)	-Standby: 13.3 (470)	15.9 (560)
	-Prime: 12.5 (441)	15.0 (530)
Exhaust Gas Temperature: °C (°F)		
-Standby:	580 (1076)	560 (1040)
-Prime:	555 (1031)	535 (995)

Alternator Performance Data

Data Item	50 Hz				60 Hz				
	415/240V	400/230V 230/115V 200/115V	380/220V 220/110V	220/127V	480/277V 240/139V	380/220V 220/110V	240/120V 208/120V	230/115V	440/254V 220/127V
Motor Starting Capability* kVA	196	184	168	217	215	143	168	157	185
Short Circuit Capacity** %	300	300	300	300	300	300	300	300	300
Reactances: Per Unit									
Xd	2.535	2.728	3.023	2.255	2.558	4.081	3.405	3.683	3.044
X'd	0.110	0.118	0.131	0.097	0.111	0.176	0.147	0.159	0.132
X''d	0.066	0.071	0.078	0.058	0.066	0.106	0.088	0.095	0.079

Reactances shown are applicable to prime ratings.
*Based on 30% voltage dip at 0.6 power factor and SHUNT excitation system.
** With optional Permanent Magnet generator.

Alternator Technical Data

Physical Data	Operating Data
Manufactured for Olympian by: OLYMPIAN	Overspeed: RPM 2250
Model: LL3114D	Voltage Regulation: (steady state) +/- 0.5%
No. of Bearings: 1	Wave Form NEMA = TIF: 50
Insulation Class: H	Wave Form IEC = THF: 2.0%
Winding Pitch - Code: 2/3 - 6	Total Harmonic Content LL/LN: 2.0%
Wires: 12	Radio Interference: Supression is in line with European Standard EN61000-6
Ingress Protection Rating: IP23	Radiant Heat: kW (Btu/min)
Excitation System: SHUNT	-50 Hz: 6.7 (381)
AVR Model: R250	-60 Hz: 7.1 (404)

Technical Data



Voltage 50 Hz	Prime		Standby	
	kVA	kW	kVA	kW
415/240V	80.0	64.0	88.0	70.4
400/230V	80.0	64.0	88.0	70.4
380/220V	80.0	64.0	88.0	70.4
230/115V	80.0	64.0	88.0	70.4
220/127V	80.0	64.0	88.0	70.4
220/110V	80.0	64.0	88.0	70.4
200/115V	80.0	64.0	88.0	70.4

Voltage 60 Hz	Prime		Standby	
	kVA	kW	kVA	kW
480/277V	90.0	72.0	100.0	80.0
220/127V	90.0	72.0	100.0	80.0
380/220V	90.0	72.0	100.0	80.0
240/120V	90.0	72.0	100.0	80.0
230/115V	90.0	72.0	100.0	80.0
440/254V	90.0	72.0	100.0	80.0
220/110V	90.0	72.0	100.0	80.0
208/120V	90.0	72.0	100.0	80.0
240/139V	90.0	72.0	100.0	80.0

Weights & Dimensions

Weights: kg (lb)	
Net (+ lube oil)	1058 (2332)
Wet (+ lube oil & coolant)	1071 (2361)
Fuel, lube oil & coolant	1256 (2769)

Dimensions: mm (in)	
Length	1925 (75.8)
Width	1120 (44.1)
Height	1361 (53.6)

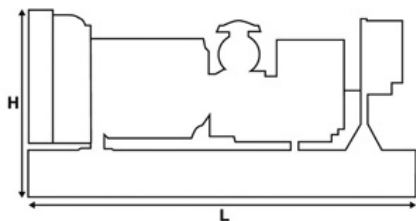

Note: General configuration not to be used for installation. See general dimension drawings for detail.

Definitions

Standby Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings. The alternator on this model is peak continuous rated (as defined in ISO 8528-3).

Prime Rating

These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercially purchased power. There is no limitation to the annual hours of operation and this model can supply 10% overload power for 1 hour in 12 hours.

Standard Reference Conditions

Note: Standard reference conditions 25°C (77°F) air inlet temp, 100m (328ft) A.S.L. 30% relative humidity. Fuel consumption data at full load with diesel fuel with specific gravity of 0.85 and conforming to BS2869: 1998, Class A2.

General Data

Documents

A full set of operation and maintenance manuals and circuit wiring diagrams.

Quality Standards

The equipment meets the following standards: BS5000, ISO 8528, ISO 3046, IEC 60034, NEMA MG-1.22.

Warranty

All prime equipment carries a one year manufacturer's warranty. Standby equipment, limited to 500 running hours per year, has a two year manufacturer's warranty. For details on warranty cover please contact your local Dealer, or visit our website: www.OlympianPower.com.

Information contained in this publication may be considered confidential. Discretion is recommended when distributing.

www.OlympianPower.com

Market: International
LEHF0109-03 (02/14)

Materials and specifications are subject to change without notice. CAT, CATERPILLAR, their respective logos OLYMPIAN, "Caterpillar Yellow," the "Power Edge" trade dress, as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

© 2014 Caterpillar
All rights reserved.